

Technical specification:

Rated voltage: 60 V
IEC 61076-2-101

Current rating: 4A bei 40°C
IEC 61076-2-101

Insulation resistance: >=100 MΩ
IEC 60512

Pollution degree: 3/2
IEC 60664-1

Degree of protection: IP 65, in mated condition
IEC 60529

Temperature range: -30°C ... +85°C
IEC 60664-1

Mating cycles: >=100
IEC 60512-9a

Materials:

Contact: CuZn

Contact plating: Nickel, gold plated

Contact carrier: PBT GF, UL 94


Sealing: FPM

Body: Thermoplastic Elastomer, RAL 9004

Installation specification:

Recommended torque: 0,6 Nm

4x Inductance 110nH

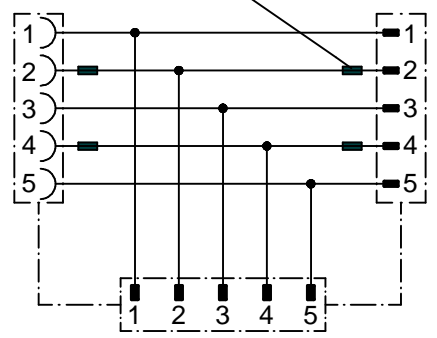

Part no:	Description:
43-11210	SAL - 12B - RS5 - RK5 - RS5

DO NOT ALTER CAD DRAWING BY HAND Directive 2002/95/EC RoHS compliant	Index: a 24.08.11 VF Ä3941 data sheet revised	dim. in mm	title: Junction box, Profibus DP, M12x1						
	tolerance of cable:	<table border="1"> <tr> <td>drawn</td> <td>30.10.07</td> <td>Mankopf</td> </tr> <tr> <td>appd.</td> <td>30.10.07</td> <td>Fromm</td> </tr> </table>		drawn	30.10.07	Mankopf	appd.	30.10.07	Fromm
	drawn	30.10.07	Mankopf						
	appd.	30.10.07	Fromm						
general tolerance:	<table border="1"> <tr> <td>0</td> <td>± 0,50mm</td> </tr> <tr> <td>0,0</td> <td>± 0,25mm</td> </tr> <tr> <td>0,00</td> <td>± 0,10mm</td> </tr> </table>	0	± 0,50mm	0,0	± 0,25mm	0,00	± 0,10mm		part no: see table
0	± 0,50mm								
0,0	± 0,25mm								
0,00	± 0,10mm								
<small>THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH</small>									