

DESCRIPTION: USB EXT, VERSION 2.0, A-MALE TO A-FEMALE, 6 FT

PART NUMBER: 30-3008-6
APPLICATION: USB 2.0 CABLE
DURABILITY: 1500 CYCLES MIN

IMPEDANCE: N/A

WORKING TEMP RANGE: -25°C TO +80°C


MATERIAL: USB AM & AF


CABLE

GOLD FLASH ON CONTACT, PVC MOLDED GRAY USB 2.0 CABLE, UL STYLE, 1P TWISTED 28AWG

AND 2C 24AWG, AMA BRAID, JACKET GRAY

RoHS COMPLIANCE: YES TECHNICAL DETAIL: N/A

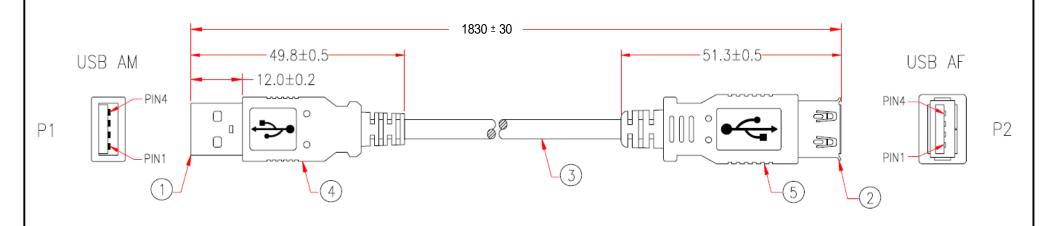



CINCH CONNECTIVITY SOLUTIONS O DEI GIOUP	3RD ANGLE PROJECTION	AIM-Cambridge
	RoHS2 <b>✓</b>	Title: USB EXT, VERSION 2.0, A-MALE TO
This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and assessment in the cities of the control of the c	2011/65/EU	A-FEMALE, 6 FT
	UNLESS OTHERWISE SPECIFIED UNITS: METRIC	Model No.
	.X ±.2	30-3008-6
INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.	.XX ±.07 ANGLES ±2°	A DO NOT SCALE Date: 2015/12/4 Sheet 1 of 1