


UltraMOV™ Varistor Series





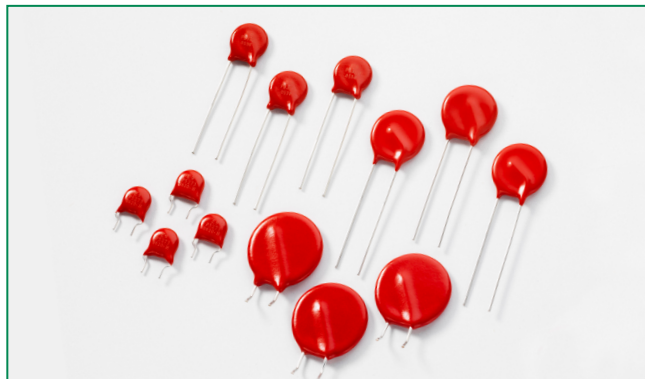

Description

The UltraMOV™ Metal Oxide Varistor Series is designed for applications requiring high peak surge current ratings and high energy absorption capability. UltraMOV™ varistors are primarily intended for use in AC Line Voltage applications such as Transient Voltage Surge Suppressors (TVSS), Uninterruptable Power Supplies (UPS), AC Power Taps, AC Power Meters, or other products that require voltage clamping of high transient surge currents from sources such as lightning, inductive load switching, or capacitor bank switching.

These devices are produced in radial lead package sizes of 7, 10, 14 and 20mm and offered in a variety of lead forms. UltraMOV™s are manufactured with recognized epoxy encapsulation and are rated for ambient temperatures up to 85°C with no derating. This Series is LASER-branded and is supplied in bulk, ammo pack (fan-fold), or tape and reel packaging.

Agency Approvals

| Agency Approval | Agency File Number |
|--|--------------------|
|  UL1449 | E320116 |
|  CECC 42201-006 IEC 61051-1 IEC 61051-2 IEC 60950-1 (Annex Q) for 14mm and 20mm only | 116895 |
|  CSA 2221 01 | LR91788 |
|  CECC 42201-006 IEC 61051-1 IEC 61051-2 IEC 60950-1 (Annex Q) for 14mm and 20mm only | E1273/F |

Features

- Lead-free, Halogen-Free and RoHS compliant.
- High peak surge current rating (I_{TM}) up to 10kA, single 8 x 20 pulse, (20mm)
- Standard operating voltage range compatible with common AC line voltages (130 V_{AC} to 625 V_{AC})
- Characterized for maximum standby current (Leakage)
- Custom voltage types available
- Standard lead form and lead space options

Additional Information



Datasheet



Resources



Samples

Absolute Maximum Ratings

• For ratings of individual members of a series, see Device Ratings and Specifications chart

| Continuous | UltraMOV™ Series | Units |
|--|------------------|------------|
| Steady State Applied Voltage: | | |
| AC Voltage Range ($V_{MIACIRMS}$) | 130 to 625 | V |
| Transients: | | |
| Single-Pulse Peak Current (I_{TM}) 8x20 μ s Wave (See Figure 2) | 1,750 to 10,000 | A |
| Single-Pulse Energy Range (W_{TM}) 2ms Square Wave | 12.5 to 400 | J |
| Operating Ambient Temperature Range (T_A) | -55 to +85 | °C |
| Storage Temperature Range (T_{STG}) | -55 to +125 | °C |
| Temperature Coefficient (α^V) of Clamping Voltage (V_C) at Specified Test Current | <0.01 | %/°C |
| Hi-Pot Encapsulation (COATING Isolation Voltage Capability) | 2500 | V |
| COATING Insulation Resistance | 1000 | M Ω |

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

UltraMOV™ Series Ratings & Specifications

| Part Number | Branding | Maximum Rating (85°C) | | | | | Specifications (25°C) | | | | |
|-------------|----------|---------------------------|---------------------------|------------------------|----------------------------------|----------------------------------|--|-----------------------------|-----------------------------------|------------------------|---------------------|
| | | Continuous | | Transient | | | Varistor Voltage at 1 mA DC Test Current | | Maximum Clamping Voltage 8 x 20µs | | Typical Capacitance |
| | | RMS Volts | DC Volts | Energy 2ms | Peak Current 8 x 20µs | | | | | | |
| | | V _{M(AC)} (V) | V _{M(DC)} (V) | W _{TM} (J) | I _{TM} 1 x Pulse (A) | I _{TM} 2 x Pulse (A) | V _{NOM} Min (V) | V _{NOM} Max (V) | V _C (V) | I _{PK} (A) | f = 1MHz (pF) |
| V07E130P | P7V130 | 130 | 170 | 12.5 | 1750 | 1200 | 184.5 | 225.5 | 340 | 10 | 180 |
| V10E130P | P10V130 | 130 | 170 | 25 | 3500 | 2500 | 184.5 | 225.5 | 340 | 25 | 450 |
| V14E130P | P14V130 | 130 | 170 | 50 | 6000 | 4500 | 184.5 | 225.5 | 340 | 50 | 1000 |
| V20E130P | P20V130 | 130 | 170 | 100 | 10000 | 6500 | 184.5 | 225.5 | 340 | 100 | 1900 |
| V07E140P | P7V140 | 140 | 180 | 13.5 | 1750 | 1200 | 198 | 242 | 360 | 10 | 160 |
| V10E140P | P10V140 | 140 | 180 | 27.5 | 3500 | 2500 | 198 | 242 | 360 | 25 | 400 |
| V14E140P | P14V140 | 140 | 180 | 55 | 6000 | 4500 | 198 | 242 | 360 | 50 | 900 |
| V20E140P | P20V140 | 140 | 180 | 110 | 10000 | 6500 | 198 | 242 | 360 | 100 | 1750 |
| V07E150P | P7V150 | 150 | 200 | 15 | 1750 | 1200 | 216 | 264 | 395 | 10 | 150 |
| V10E150P | P10V150 | 150 | 200 | 30 | 3500 | 2500 | 216 | 264 | 395 | 25 | 360 |
| V14E150P | P14V150 | 150 | 200 | 60 | 6000 | 4500 | 216 | 264 | 395 | 50 | 800 |
| V20E150P | P20V150 | 150 | 200 | 120 | 10000 | 6500 | 216 | 264 | 395 | 100 | 1600 |
| V07E175P | P7V175 | 175 | 225 | 17 | 1750 | 1200 | 243 | 297 | 455 | 10 | 130 |
| V10E175P | P10V175 | 175 | 225 | 35 | 3500 | 2500 | 243 | 297 | 455 | 25 | 350 |
| V14E175P | P14V175 | 175 | 225 | 70 | 6000 | 4500 | 243 | 297 | 455 | 50 | 700 |
| V20E175P | P20V175 | 175 | 225 | 135 | 10000 | 6500 | 243 | 297 | 455 | 100 | 1400 |
| V07E230P | P7V230 | 230 | 300 | 20 | 1750 | 1200 | 324 | 396 | 595 | 10 | 100 |
| V10E230P | P10V230 | 230 | 300 | 42 | 3500 | 2500 | 324 | 396 | 595 | 25 | 250 |
| V14E230P | P14V230 | 230 | 300 | 80 | 6000 | 4500 | 324 | 396 | 595 | 50 | 550 |
| V20E230P | P20V230 | 230 | 300 | 160 | 10000 | 6500 | 324 | 396 | 595 | 100 | 1100 |
| V07E250P | P7V250 | 250 | 320 | 25 | 1750 | 1200 | 351 | 429 | 650 | 10 | 90 |
| V10E250P | P10V250 | 250 | 320 | 50 | 3500 | 2500 | 351 | 429 | 650 | 25 | 220 |
| V14E250P | P14V250 | 250 | 320 | 100 | 6000 | 4500 | 351 | 429 | 650 | 50 | 500 |
| V20E250P | P20V250 | 250 | 320 | 170 | 10000 | 6500 | 351 | 429 | 650 | 100 | 1000 |
| V07E275P | P7V275 | 275 | 350 | 28 | 1750 | 1200 | 387 | 473 | 710 | 10 | 80 |
| V10E275P | P10V275 | 275 | 350 | 55 | 3500 | 2500 | 387 | 473 | 710 | 25 | 200 |
| V14E275P | P14V275 | 275 | 350 | 110 | 6000 | 4500 | 387 | 473 | 710 | 50 | 450 |
| V20E275P | P20V275 | 275 | 350 | 190 | 10000 | 6500 | 387 | 473 | 710 | 100 | 900 |
| V07E300P | P7V300 | 300 | 385 | 30 | 1750 | 1200 | 423 | 517 | 775 | 10 | 70 |
| V10E300P | P10V300 | 300 | 385 | 60 | 3500 | 2500 | 423 | 517 | 775 | 25 | 180 |
| V14E300P | P14V300 | 300 | 385 | 125 | 6000 | 4500 | 423 | 517 | 775 | 50 | 400 |
| V20E300P | P20V300 | 300 | 385 | 250 | 10000 | 6500 | 423 | 517 | 775 | 100 | 800 |
| V07E320P | P7V320 | 320 | 420 | 32 | 1750 | 1200 | 459 | 561 | 840 | 10 | 65 |
| V10E320P | P10V320 | 320 | 420 | 67 | 3500 | 2500 | 459 | 561 | 840 | 25 | 170 |
| V14E320P | P14V320 | 320 | 420 | 136 | 6000 | 4500 | 459 | 561 | 840 | 50 | 380 |
| V20E320P | P20V320 | 320 | 420 | 273 | 10000 | 6500 | 459 | 561 | 840 | 100 | 750 |
| V07E385P | P7V385 | 385 | 505 | 36 | 1750 | 1200 | 558 | 682 | 1025 | 10 | 60 |
| V10E385P | P10V385 | 385 | 505 | 75 | 3500 | 2500 | 558 | 682 | 1025 | 25 | 160 |
| V14E385P | P14V385 | 385 | 505 | 150 | 6000 | 4500 | 558 | 682 | 1025 | 50 | 360 |
| V20E385P | P20V385 | 385 | 505 | 300 | 10000 | 6500 | 558 | 682 | 1025 | 100 | 700 |
| V07E420P | P7V420 | 420 | 560 | 40 | 1750 | 1200 | 612 | 748 | 1120 | 10 | 55 |
| V10E420P | P10V420 | 420 | 560 | 80 | 3500 | 2500 | 612 | 748 | 1120 | 25 | 140 |
| V14E420P | P14V420 | 420 | 560 | 160 | 6000 | 4500 | 612 | 748 | 1120 | 50 | 300 |
| V20E420P | P20V420 | 420 | 560 | 320 | 10000 | 6500 | 612 | 748 | 1120 | 100 | 600 |
| V07E440P | P7V440 | 440 | 585 | 44 | 1750 | 1200 | 643.5 | 786.5 | 1180 | 10 | 50 |
| V10E440P | P10V440 | 440 | 585 | 85 | 3500 | 2500 | 643.5 | 786.5 | 1180 | 25 | 130 |
| V14E440P | P14V440 | 440 | 585 | 170 | 6000 | 4500 | 643.5 | 786.5 | 1180 | 50 | 260 |
| V20E440P | P20V440 | 440 | 585 | 340 | 10000 | 6500 | 643.5 | 786.5 | 1180 | 100 | 500 |
| V07E460P | P7V460 | 460 | 615 | 48 | 1750 | 1200 | 675 | 825 | 1240 | 10 | 45 |
| V10E460P | P10V460 | 460 | 615 | 90 | 3500 | 2500 | 675 | 825 | 1240 | 25 | 120 |
| V14E460P | P14V460 | 460 | 615 | 180 | 6000 | 4500 | 675 | 825 | 1240 | 50 | 220 |

UltraMOV™ Series Ratings & Specifications (Continued...)

| Part Number | Branding | Maximum Rating (85°C) | | | | | Specifications (25°C) | | | | |
|-------------|----------|-----------------------|-------------|------------|-----------------------|--------------------|---|---------------|-----------------------------------|----------|---------------------|
| | | Continuous | | Transient | | | Varistor Voltage at 1mA DC Test Current | | Maximum Clamping Voltage 8 x 20µs | | Typical Capacitance |
| | | RMS Volts | DC Volts | Energy 2ms | Peak Current 8 x 20µs | | | | | | |
| | | $V_{M(AC)}$ | $V_{M(DC)}$ | W_{TM} | I_{TM} 1 x Pulse | I_{TM} 2 x Pulse | V_{NOM} Min | V_{NOM} Max | V_C | I_{PK} | $f = 1\text{MHz}$ |
| (V) | (V) | (J) | (A) | (A) | (V) | (V) | (V) | (A) | (pF) | | |
| V20E460P | P20V460 | 460 | 615 | 360 | 10000 | 6500 | 675 | 825 | 1240 | 100 | 400 |
| V07E510P | P7V510 | 510 | 670 | 52 | 1750 | 1200 | 738 | 902 | 1355 | 10 | 40 |
| V10E510P | P10V510 | 510 | 670 | 92 | 3500 | 2500 | 738 | 902 | 1355 | 25 | 110 |
| V14E510P | P14V510 | 510 | 670 | 185 | 6000 | 4500 | 738 | 902 | 1355 | 50 | 200 |
| V20E510P | P20V510 | 510 | 670 | 365 | 10000 | 6500 | 738 | 902 | 1355 | 100 | 350 |
| V10E550P | P10V550 | 550 | 745 | 95 | 3500 | 2500 | 819 | 1001 | 1500 | 25 | 100 |
| V14E550P | P14V550 | 550 | 745 | 190 | 6000 | 4500 | 819 | 1001 | 1500 | 50 | 180 |
| V20E550P | P20V550 | 550 | 745 | 370 | 10000 | 6500 | 819 | 1001 | 1500 | 100 | 300 |
| V10E625P | P10V625 | 625 | 825 | 100 | 3500 | 2500 | 900 | 1100 | 1650 | 25 | 90 |
| V14E625P | P14V625 | 625 | 825 | 200 | 6000 | 4500 | 900 | 1100 | 1650 | 50 | 160 |
| V20E625P | P20V625 | 625 | 825 | 400 | 10000 | 6500 | 900 | 1100 | 1650 | 100 | 250 |

NOTE: 1. Average power dissipation of transients should not exceed 0.25W, 0.4W, 0.6W and 1.0W for 7mm, 10mm, 14mm, and 20mm model sizes, respectively.

Current Energy and Power Dissipation Ratings

Should transients occur in rapid succession, the average power dissipation is the energy (watt-seconds) per pulse times the number of pulses per second. The power so developed must be within the specifications shown on the Device Ratings and Specifications Table for the specific

device. The operating values of a MOV need to be derated at high temperatures as shown above. Because varistors only dissipate a relatively small amount of average power they are not suitable for repetitive applications that involve substantial amounts of average power dissipation.

Figure 1A - Power Derating for Epoxy Coated


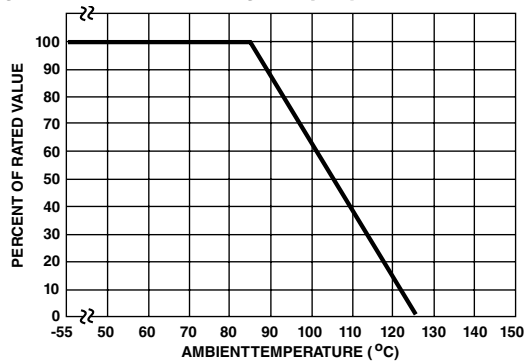


Figure 1B - Power Derating for Phenolic Coated

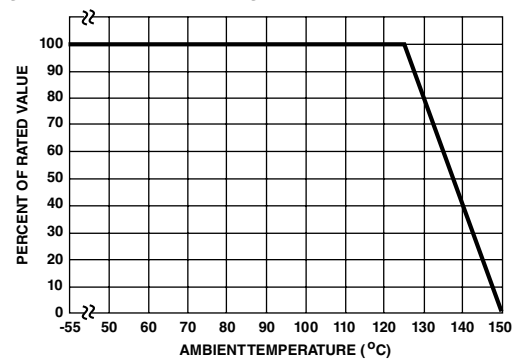

Peak Pulse Current Test Waveform

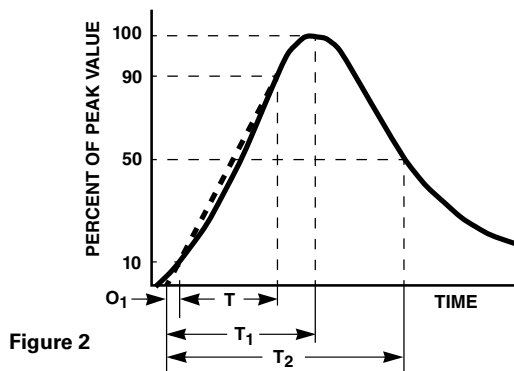


Figure 2

O_1 = Virtual Origin of Wave
 T = Time from 10% to 90% of Peak
 T_1 = Rise Time = 1.25 x T
 T_2 = Decay Time


Example - For an 8/20 µs Current Waveform:

$8\mu\text{s} = T_1 = \text{Rise Time}$


$20\mu\text{s} = T_2 = \text{Decay Time}$

Transient V-I Characteristics Curves


Maximum Clamping Voltage for 7mm Parts

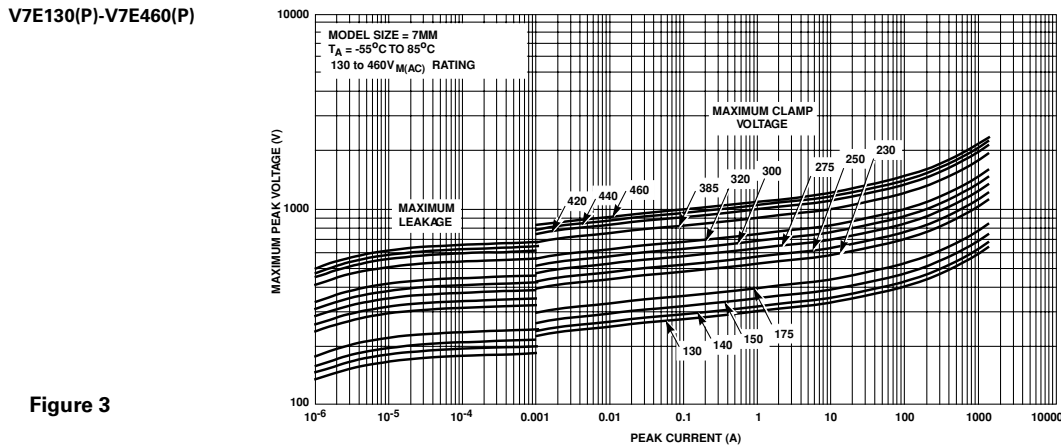

Maximum Clamping Voltage for 10mm Parts

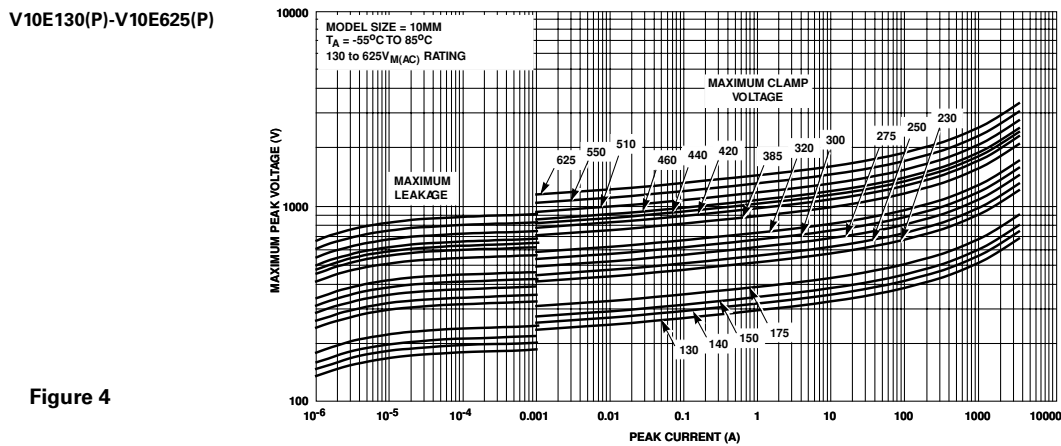

Maximum Clamping Voltage for 14mm Parts

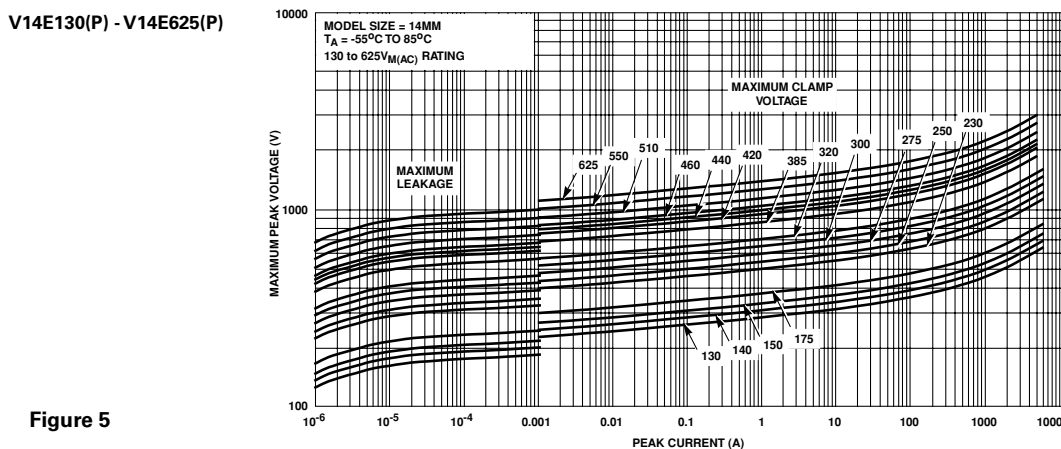

Transient V-I Characteristics Curves (Continued...)

Maximum Clamping Voltage for 20mm Parts

V20E130(P) - V20E625(P)

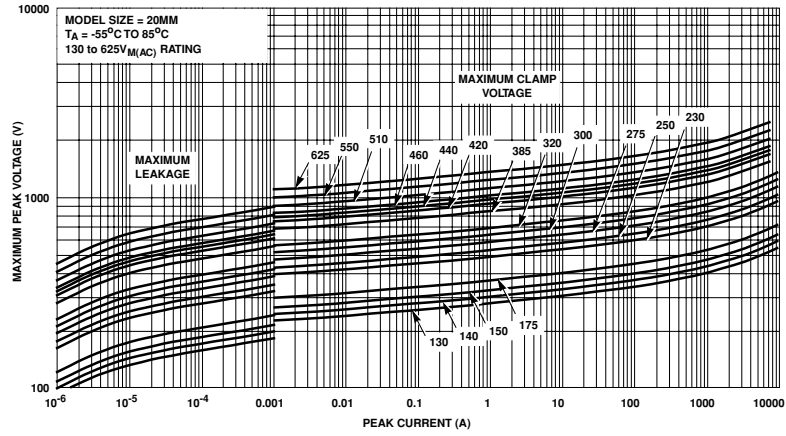


Figure 6

Pulse Rating Curves

Repetitive Surge Capability for 7mm Parts

V7E130(P) - V7E460(P)


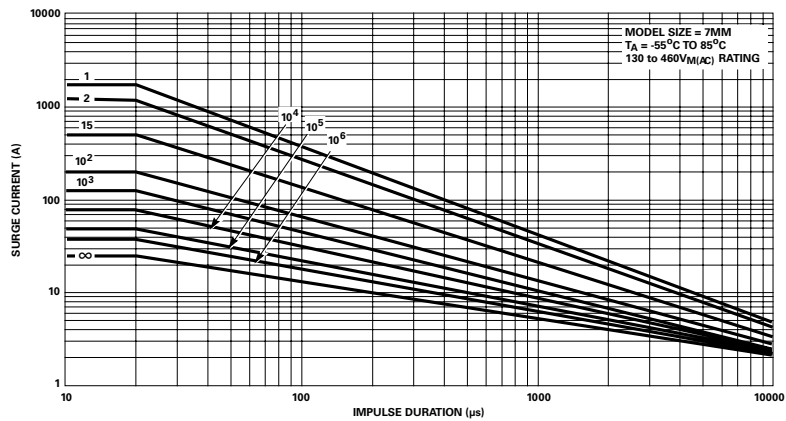



Figure 7

Pulse Rating Curves (Continued...)


Repetitive Surge Capability for 10mm Parts

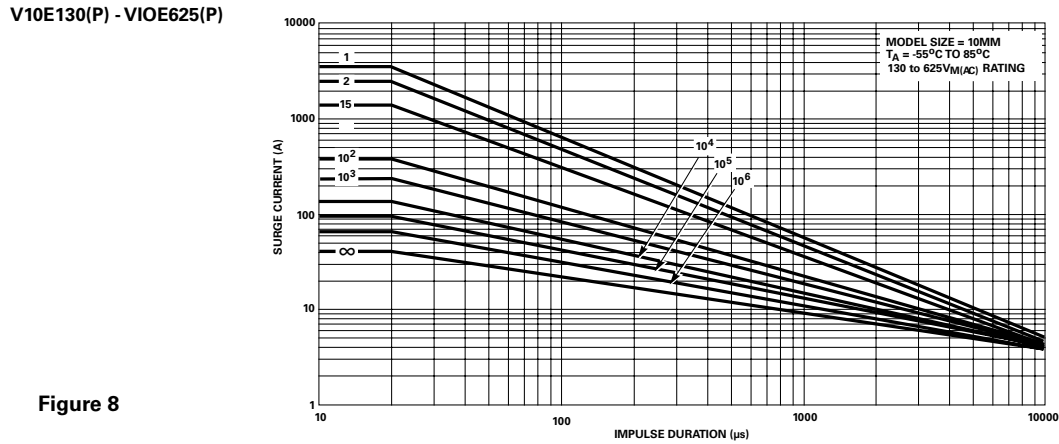

Repetitive Surge Capability for 14mm Parts

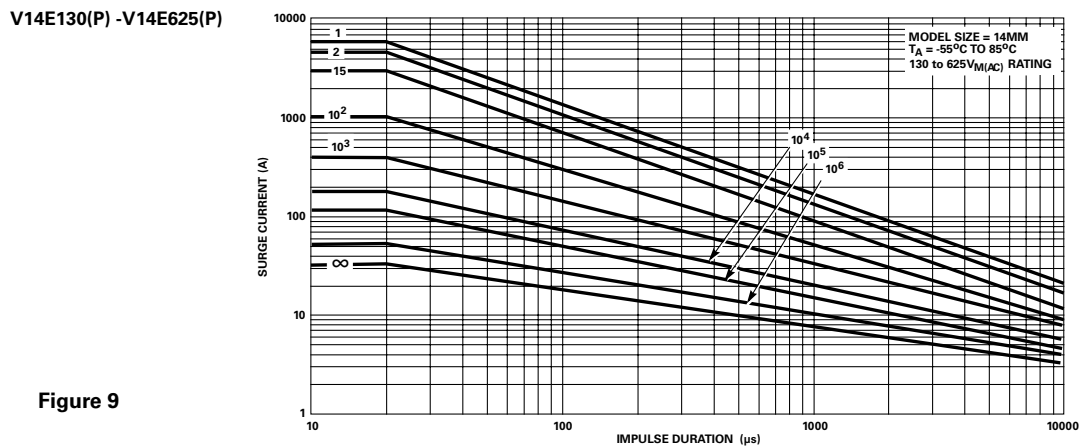

Repetitive Surge Capability for 20mm Parts

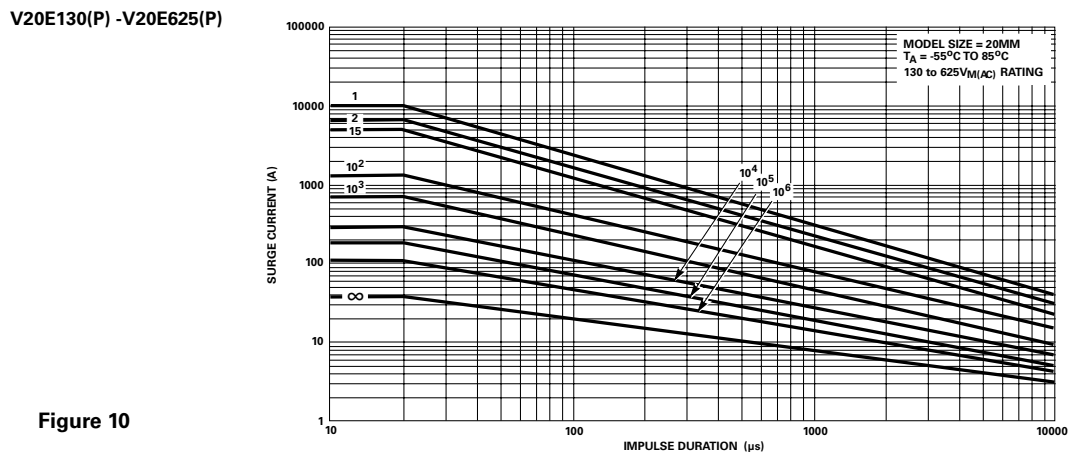

Wave Solder Profile

Non Lead-free Profile

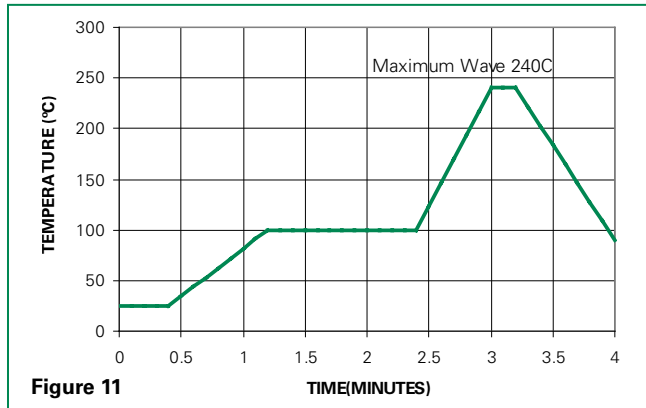


Figure 11

Lead-free Profile

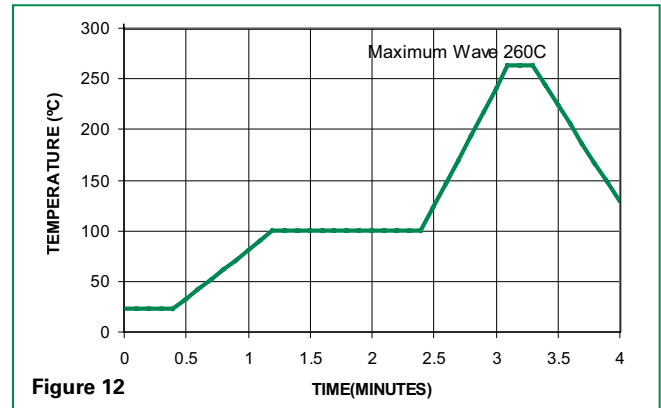


Figure 12

Physical Specifications


| | |
|----------------------------------|---|
| Lead Material | Copper Clad Steel Wire |
| Soldering Characteristics | Solderability per MIL-STD-202, Method 208E |
| Insulating Material | Cured, flame retardant epoxy polymer meets UL94V-0 requirements |
| Device Labeling | Marked with LF, voltage, UL/CSA logos, and date code |

Environmental Specifications

| | |
|--------------------------------------|--|
| Operating/Storage Temperature | -55°C to +85°C/-55°C to +125°C |
| Humidity Aging | +85°C, 85% RH, 1000 hours +/-10% typical voltage change |
| Thermal Shock | +85°C to -40°C 5 times +/-10% typical voltage change |
| Solvent Resistance | MIL-STD-202, Method 215F |
| Moisture Sensitivity | Level 1, J-STD-020C |


Phenolic Coating Option -- UltraMOV™ Series Varistors for Hi-Temperature Operating Conditions:

- Phenolic Coated UltraMOV™ Series devices are available with improved maximum operating temperature 125°C.
- These devices also have improved temperature cycling performance capability.
- Ratings and Specifications are as per standard UltraMOV™ Series except Hi-Pot Encapsulation (Isolation Voltage Capability) = 500V.
- Phenolic Coating is HALOGEN FREE. To order: change 'E' (Epoxy coating) in part number to 'P' (Phenolic coating; e.g. V20P230)
- See Part Numbering System section of this series for more information.
- Contact factory for further details.
- Product marking:




Product Dimensions (mm)

Lead form options L1 and L3
(refer to table below)

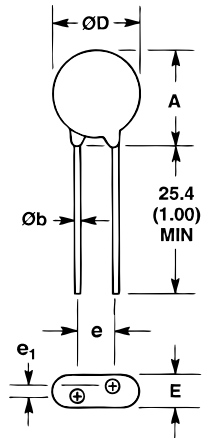

Lead form options L2 and L4
(refer to table below)



*Seating plane interpretation per IEC-717
(not available on tape or ammo pack)

| Dimension | V _{RMS} Voltage Model | 7mm Size | | 10mm Size | | 14mm Size | | 20mm Size | |
|-------------------------------|--------------------------------------|------------------|------------------|-----------------|-----------------|-----------------|-----------------|--------------------------|--------------------------|
| | | Min. mm (in) | Max. mm (in) | Min. mm (in) | Max. mm (in) | Min. mm (in) | Max. mm (in) | Min. mm (in) | Max. mm (in) |
| A | 130-320 | - | 12 (0.472) | - | 16 (0.630) | - | 20 (0.787) | - | 26.5 (1.043) |
| | 385-625 | - | 13 (0.512) | - | 17 (0.689) | - | 20.5 (0.807) | - | 28 (1.102) |
| ØD | All | - | 9 (0.354) | - | 12.5 (0.492) | - | 17 (0.669) | - | 23 (0.906) |
| e (Note 2) | All | 4 (0.157) | 6 (0.236) | 6.5 (0.256) | 8.5 (0.335) | 6.5 (0.256) | 8.5 (0.335) | 9 (0.354) | 11 (0.433) |
| e₁ (Note 3) | 130-320 | 1.5 (0.059) | 3.5 (0.138) | 1.5 (0.059) | 3.5 (0.138) | 1.5 (0.059) | 3.5 (0.138) | 1.5 (0.059) | 3.5 (0.138) |
| | 385-625 | 2.5 (0.098) | 5.5 (0.217) | 2.5 (0.098) | 5.5 (0.217) | 2.5 (0.098) | 5.5 (0.217) | 2.5 (0.098) | 5.5 (0.217) |
| E | 130-320 | - | 5.6 (0.220) | - | 5.6 (0.220) | - | 5.6 (0.220) | - | 5.6 (0.220) |
| | 385-510 | - | 7.3 (0.287) | - | 7.3 (0.287) | - | 7.3 (0.287) | - | 7.3 (0.287) |
| | 550-625 | - | 8.3 (0.327) | - | 8.3 (0.327) | - | 8.3 (0.327) | - | 8.3 (0.327) |
| Ø b | All | 0.585 (0.023) | 0.685 (0.027) | 0.76 (0.030) | 0.86 (0.034) | 0.76 (0.030) | 0.86 (0.034) | 0.76 (0.030) (Note 2) | 0.86 (0.034) (Note 2) |
| A_{TRIM} | All | - | 15 (0.591) | - | 19.5 (0.768) | - | 22.5 (0.886) | - | 29.0 (1.142) |
| L (L2) | All | 25.4 (1.00) | - | 25.4 (1.00) | - | 25.4 (1.00) | - | 25.4 (1.00) | - |
| *L (L4) | All | 2.41 (0.095) | 4.69 (0.185) | 2.41 (0.095) | 4.69 (0.185) | 2.41 (0.095) | 4.69 (0.185) | 2.41 (0.095) | 4.69 (0.185) |


- NOTES:
 1. Measurements displayed in Millimeters (Inches in parentheses).
 2. Standard lead space.
 3. For in-line lead option L3, dimension e₁ is "zero". Straight lead form option L1 shown.

For information about bulk packaging quantities, please refer to the Ordering Notes section at the end of this document.


Tape Specifications for Reel and Ammo Pack Items (Refer to dimensions on following page)

7mm Devices


CRIMPED LEADS "L2"

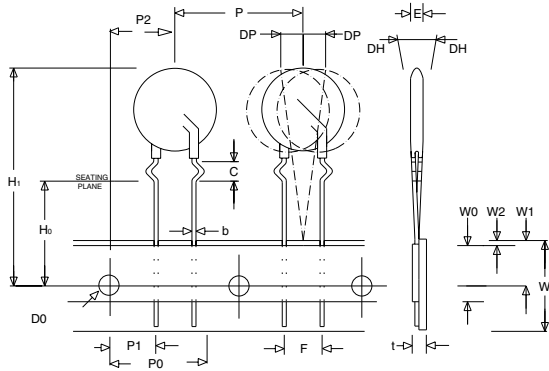

INLINE LEADS "L3"

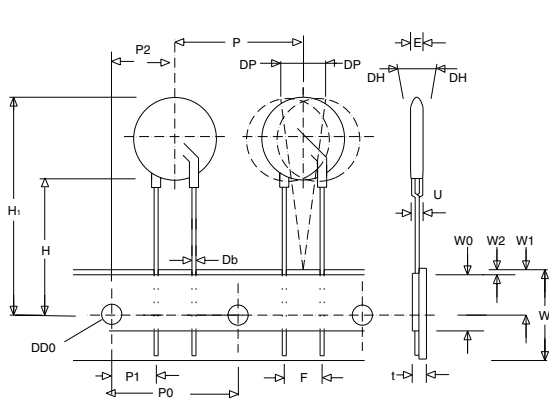


STRAIGHT LEADS "L1"

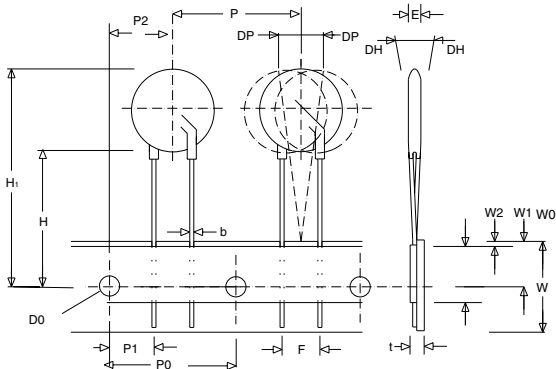


10, 14 and 20mm Devices


CRIMPED LEADS "L2"

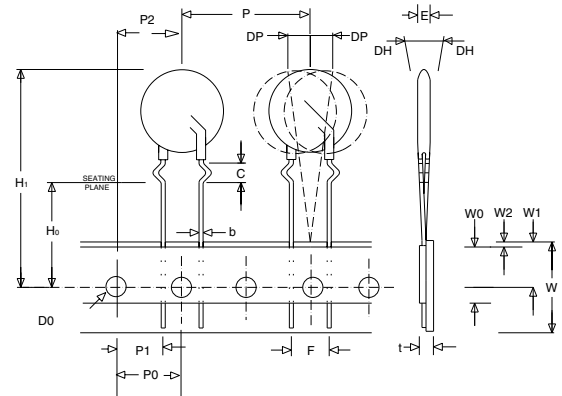

INLINE LEADS "L3"

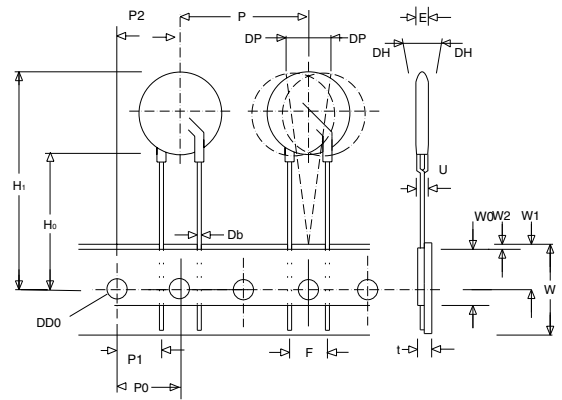

STRAIGHT LEADS "L1"

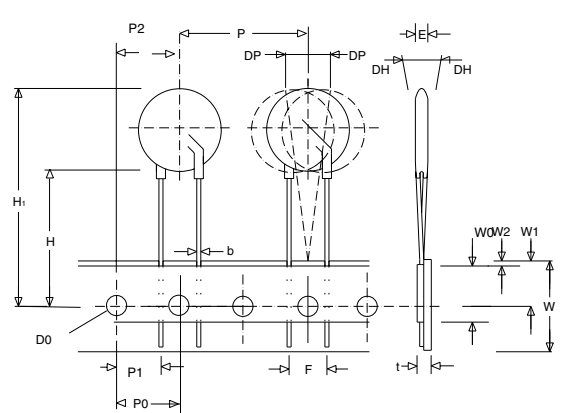


Tape Specifications for Reel and Ammo Pack Items (Refer to drawings on previous page)

- Conforms to ANSI and EIA specifications.
- Can be supplied to IEC Publication 286-2.
- Radial devices on tape are offered with crimped leads, straight leads, or in-line leads. See Ordering Information.
- For 10mm devices 'P' (component pitch) is 12.7mm when 'F' (lead space) is 5mm.
- 7mm parts are available on tape and reel up to 460 VAC only
- 10mm parts are available on tape and reel up to 510 VAC only
- 14mm and 20mm parts are available on tape and reel up to 550 VAC only
- 7mm devices with 7.5mm lead spacing option will be taped at 25.4mm component pitch and 500 pieces per reel
- 10mm devices with 5.0mm lead spacing option will be taped at 12.7mm component pitch and 1000 pieces per reel

| Symbol | Description | Model Size | | | |
|----------------------|---|-------------------|--------------------|------------------|-------------------|
| | | 7mm | 10mm | 14mm | 20mm |
| B₁ | Component Top to Seating Plane | 15 Max | 19.5 Max | 22.5 Max | 29 Max |
| C | Crimp Length | 2.4 Typ | 2.6 Typ | 2.6 Typ | 2.6 Typ |
| P | Pitch of Component | 12.7 +/- 1.0 | 25.4 +/- 1.0 | 25.4 +/- 1.0 | 25.4 +/- 1.0 |
| P₀ | Feed Hole Pitch | 12.7 +/- 0.2 | 12.7 +/- 0.2 | 12.7 +/- 0.2 | 12.7 +/- 0.2 |
| P₁ | Feed Hole Center to Pitch | 3.85 +/- 0.7 | 8.85 +/- 0.7 | 8.85 +/- 0.7 | 7.70 +/- 0.7 |
| P₂ | Hole Center to Component Center | 6.35 +/- 0.7 | 12.7 +/- 0.7 | 12.7 +/- 0.7 | 12.7 +/- 0.7 |
| F | Lead to Lead Distance | 5.0 +/- 0.8 | 7.5 +/- 0.8 | 7.5 +/- 0.8 | 10.0 +/- 0.8 |
| Δh | Component Alignment | 2.0 Max | 2.0 Max | 2.0 Max | 2.0 Max |
| W | Tape Width | 18.0 +1.0 / -0.5 | 18.0 +1.0 / -0.52 | 18.0 +1.0 / -0.5 | 18.0 +1.0 / -0.5 |
| W₀ | Hold Down Tape Width | 12.0 +/- 0.3 | 12.0 +/- 0.3 | 12.0 +/- 0.3 | 12.0 +/- 0.3 |
| W₁ | Hole Position | 9.0 +0.75 / -0.50 | 9.0 +0.75 / - 0.50 | 9.0 +0.75 / 0.50 | 9.0 +0.75 / -0.50 |
| W₂ | Hold Down Tape Position | 0.5 Max | 0.5 Max | 0.5 Max | 0.5 Max |
| H | Height from Tape Center to Component Base | 18.0 +2.0 / -0.0 | 18.0 +2.0 / -0.0 | 18.0 +2.0 / -0.0 | 18.0 +2.0 / -0.0 |
| H₀ | Seating Plane Height | 16.0 +/- 0.5 | 16.0 +/- 0.5 | 16.0 +/- 0.5 | 16.0 +/- 0.5 |
| H₁ | Component Height | 32.0 Max | 36.0 Max | 40.0 Max | 46.5 Max |
| D₀ | Feed Hole Diameter | 4.0 +/- 0.2 | 4.0 +/- 0.2 | 4.0 +/- 0.2 | 4.0 +/- 0.2 |
| t | Total Tape Thickness | 0.7 +/- 0.2 | 0.7 +/- 0.2 | 0.7 +/- 0.2 | 0.7 +/- 0.2 |
| Δp | Component Alignment | 3° Max, 1.00mm | 3° Max, 1.00mm | 3° Max, 1.00mm | 3° Max, 1.00mm |

For information on tape and reel packaging quantities, please refer to the Ordering Notes section at the end of this document.

Part Numbering System

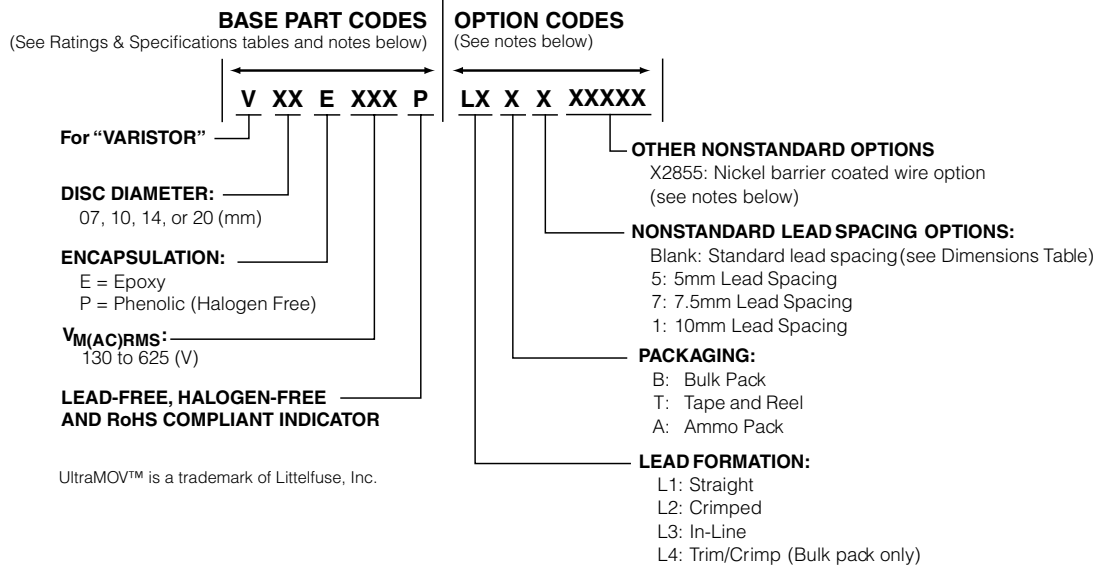

Ordering Notes:

For standard parts, use the **BASE PART** designator only.

For parts with non-standard options (such as additional form, packaging and lead space options) use, **BASE PART + OPTION CODE**.

OPTION CODE items are subject to availability and minimum order requirements. Please contact a Littelfuse representative if you require additional information

OPTION CODES:

X2855: Nickel Barrier COATED WIRE OPTION

All standard parts use tinned copper clad steel wire. Nickel Barrier Coated Wire is available as an option, consisting of Copper Wire with a flashing of Nickel followed by a top coating of Tin.

To order: append standard model **BASE PART** number with "X2855." Example:

| Standard Model | Order As |
|----------------|---------------|
| V18ZA40P | V18ZA40PX2855 |

PACKAGING:

Littelfuse UltraMOV™ varistors are shipped standard in bulk pack with straight leads and lead spacing outlined in the dimensions sections of this document. Contact a Littelfuse representative to discuss non-standard options.

Standard Part Default Conditions

| Device Size | Part # | Lead Space | Packaging |
|-------------|--------|------------|-----------|
| 7mm | V07E- | 5.0-/±1 | Bulk |
| 10mm | V10E- | 7.5-/±1 | Bulk |
| 14mm | V14E- | 7.5-/±1 | Bulk |
| 20mm | V20E- | 10.0-/±1 | Bulk |


Standard Bulk Pack Quantity

| Varistor Voltage | Standard Bulk Pack Quantity | | | |
|------------------|-----------------------------|------|------|------|
| | Varistor Model Size | | | |
| | 7mm | 10mm | 14mm | 20mm |
| 130 – 275 | 1500 | 1000 | 700 | 500 |
| 300 – 460 | 1500 | 700 | 600 | 400 |
| 510 – 625 | 1500 | 700 | 500 | 400 |

Tape & Reel Quantity

| Varistor Voltage | Shipping Quantity Per Reel | | | |
|------------------|----------------------------|------|------|------|
| | 7mm | 10mm | 14mm | 20mm |
| 130 – 275 | 1000 | 500 | 500 | 500 |
| 300 – 625 | 1000 | 500 | 400 | 400 |

UltraMOV™ 25S Varistor Series

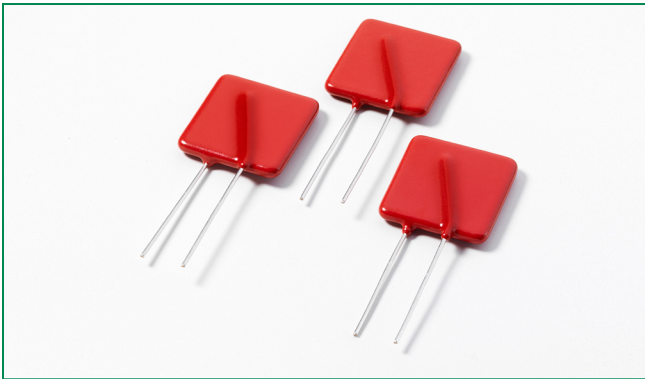

Description

The UltraMOV™ 25S Varistor Series is designed for applications requiring high peak surge current ratings and high energy absorption capability. UltraMOV™ varistors are primarily intended for use in AC Line Voltage applications such as Surge Protective Devices (SPD), Uninterruptable Power Supplies (UPS), AC Power Taps, AC Power Meters, or other products that require voltage clamping of high transient surge currents from sources such as lightning, inductive load switching, or capacitor bank switching.

These devices have 25mm square forms are produced in a radial lead package and offered with straight leads. UltraMOVs are manufactured with recognized epoxy encapsulation and are rated for ambient temperatures up to 85°C with no derating. This 25S Series is LASER-branded and is supplied in bulk packaging.

Agency Approvals

| Agency | Agency File Number | Status |
|--------|--------------------|----------|
| | E320116 | Approved |
| | 091788 | Approved |

Additional Information



Datasheet



Resources



Samples

Features

- Lead-free and RoHS compliant.
- High peak surge current rating (I_{TM}) 22kA, single 8/20 μ s pulse, (25mm)
- Standard operating voltage range compatible with common AC line voltages (115 to 750VAC)
- Custom voltage types available
- Standard lead form and lead space options

Absolute Maximum Ratings

• For ratings of individual members of a series, see Device Ratings and Specifications chart

| Continuous | UltraMOV™ 25S Series | Units |
|--|----------------------|------------|
| Steady State Applied Voltage: | | |
| AC Voltage Range ($V_{MIACIRMS}$) | 115 to 750 | V |
| DC Voltage Range (V_{MDC1}) | 150 to 970 | V |
| Transients: | | |
| Peak Pulse Current (I_{TM}) 8x20 μ s Current Wave Single Pulse | 22,000 | A |
| Single-Pulse Energy Capability (W_{TM}) 2ms Current Wave | 230 to 890 | J |
| Operating Ambient Temperature Range (T_A) | -55 to +85 | °C |
| Storage Temperature Range (T_{STG}) | -55 to +125 | °C |
| Temperature Coefficient (α^V) of Clamping Voltage (V_C) at Specified Test Current | <0.01 | %/C |
| Hi-Pot Encapsulation (COATING Isolation Voltage Capability) | 2500 | V |
| Dielectric Withstand DC for 1 min per MIL-STD-202, Method 301 | | |
| Insulation Resistance of the Epoxy Coating | 1000 | M Ω |

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.


UltraMOV™ 25S Series Ratings & Specifications

| Part Number | Branding | Maximum Rating (85°C) | | | | Specifications (25°C) | | | | |
|-------------|----------|-----------------------|-------------|--------------------------------|--------------------------------|---|-----------------------|--|--|------------------------------|
| | | Continuous | | Transient | | Varistor Voltage at 1mA DC Test Current | | Maximum Clamping Voltage at 100A, 8 x 20µs | UL 1449 ed.3 Voltage Protection Rating | Typical Capacitance f = 1MHz |
| | | AC Volts | DC Volts | Energy 2ms | Peak Surge Current 8 x 20µs | | | | | |
| | | $V_{M(ACIRMS)}$ | $V_{M(DC)}$ | $W_{TM} 1 \times \text{Pulse}$ | $I_{TM} 1 \times \text{Pulse}$ | $V_{NOM} \text{ Min}$ | $V_{NOM} \text{ Max}$ | V_C | VPR | C |
| (V) | (V) | (J) | (A) | (V) | | (V) | | (pF) | | |
| V25S115P | P25S115 | 115 | 150 | 230 | 22000 | 162 | 198 | 295 | 400 | 4500 |
| V25S130P | P25S130 | 130 | 170 | 255 | 22000 | 184.5 | 225.5 | 335 | 500 | 3900 |
| V25S140P | P25S140 | 140 | 180 | 285 | 22000 | 198 | 242 | 355 | 500 | 3500 |
| V25S150P | P25S150 | 150 | 200 | 300 | 22000 | 216 | 264 | 390 | 500 | 3200 |
| V25S175P | P25S175 | 175 | 225 | 315 | 22000 | 243 | 297 | 450 | 600 | 2550 |
| V25S230P | P25S230 | 230 | 300 | 400 | 22000 | 324 | 396 | 585 | 700 | 1900 |
| V25S250P | P25S250 | 250 | 320 | 435 | 22000 | 351 | 429 | 640 | 800 | 1750 |
| V25S275P | P25S275 | 275 | 350 | 470 | 22000 | 387 | 473 | 700 | 900 | 1610 |
| V25S300P | P25S300 | 300 | 385 | 500 | 22000 | 423 | 517 | 765 | 1000 | 1450 |
| V25S320P | P25S320 | 320 | 420 | 540 | 22000 | 459 | 561 | 825 | 1000 | 1350 |
| V25S385P | P25S385 | 385 | 505 | 630 | 22000 | 558 | 682 | 1010 | 1200 | 1080 |
| V25S420P | P25S420 | 420 | 560 | 655 | 22000 | 612 | 748 | 1100 | 1500 | 1000 |
| V25S440P | P25S440 | 440 | 585 | 675 | 22000 | 643.5 | 786.5 | 1160 | n/a | 900 |
| V25S460P | P25S460 | 460 | 615 | 690 | 22000 | 675 | 825 | 1220 | n/a | 870 |
| V25S510P | P25S510 | 510 | 670 | 700 | 22000 | 738 | 902 | 1335 | n/a | 820 |
| V25S550P | P25S550 | 550 | 745 | 765 | 22000 | 819 | 1001 | 1475 | n/a | 750 |
| V25S625P | P25S625 | 625 | 825 | 800 | 22000 | 900 | 1100 | 1625 | n/a | 660 |
| V25S750P | P25S750 | 750 | 970 | 890 | 22000 | 1080 | 1320 | 1950 | n/a | 550 |

Note: Average powder dissipation of transients should not exceed 1.5 watts.


Transient V-I Characteristics Curves

Peak Current, Energy and Power Derating Curve

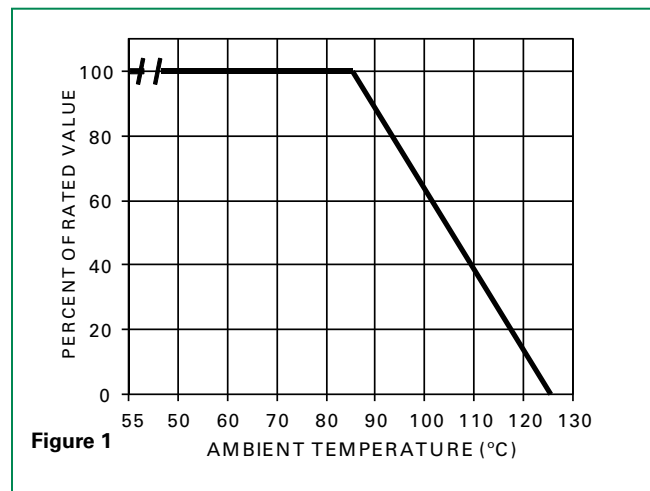

For applications exceeding 85°C ambient temperature, the peak surge current and energy ratings must be reduced as shown above.

Peak Pulse Current Test Waveform for Clamping Voltage

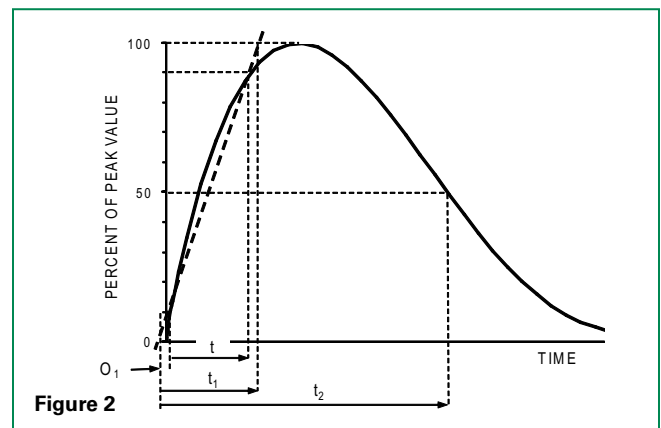

O_1 = Virtual Origin of Wave

T = Time from 10% to 90% of Peak

T_1 = Rise Time = 1.25 x T

T_2 = Decay Time

Example - For an 8/20 µs Current Waveform:

8µs = T_1 = Rise Time

20µs = T_2 = Decay Time

V-I Limit Curves

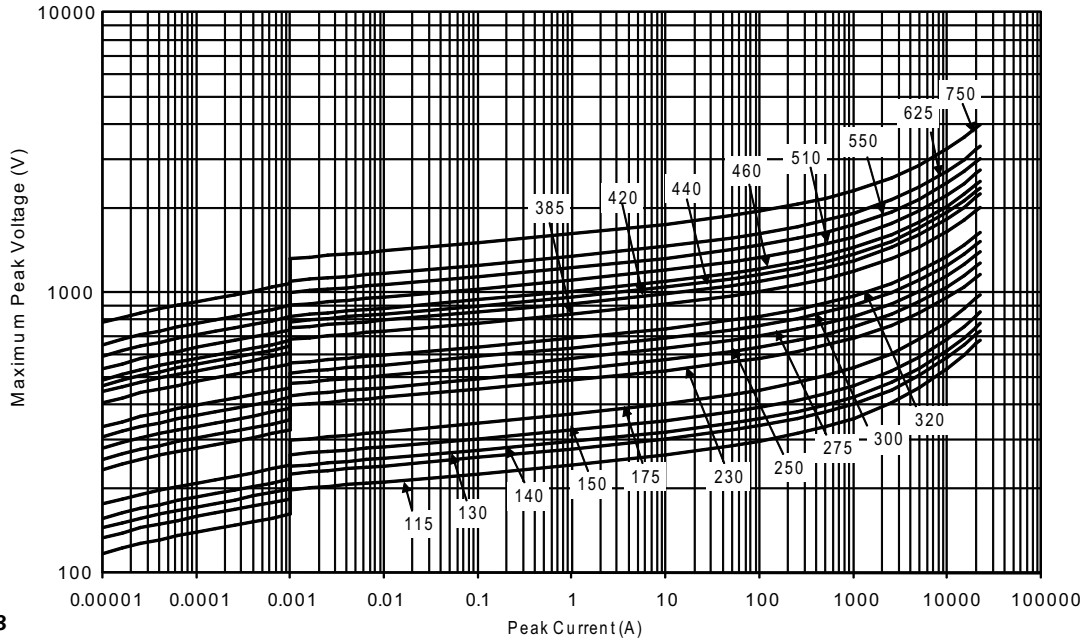


Figure 3

Pulse Rating Curves


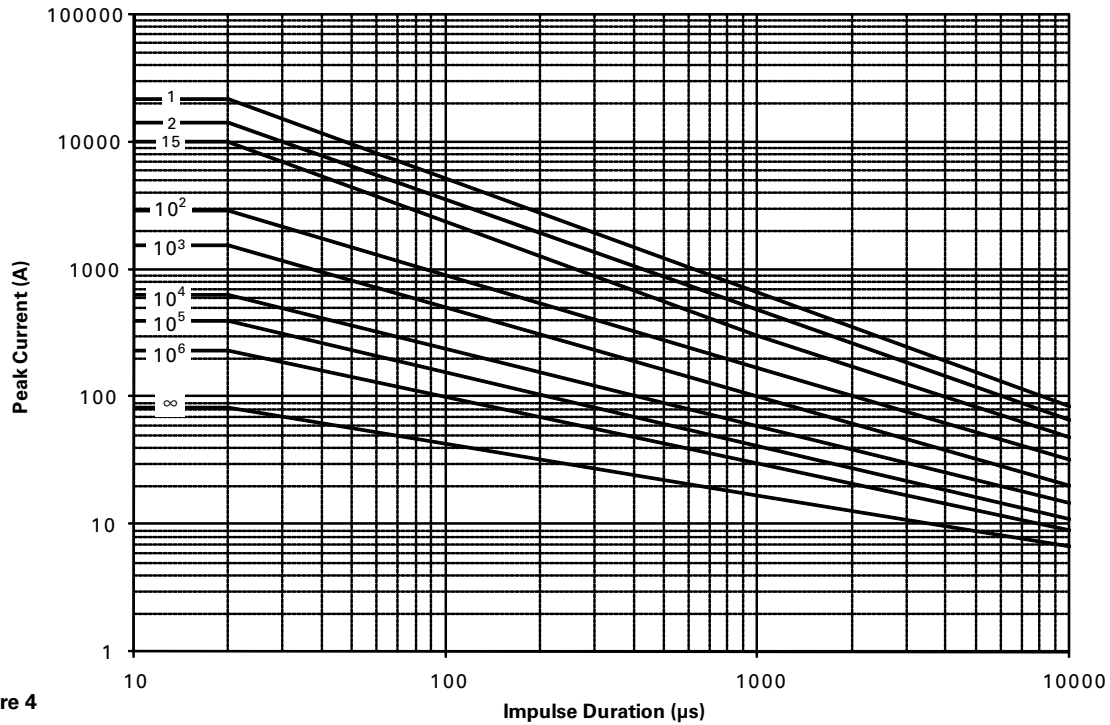



Figure 4

Wave Solder Profile

Non Lead-free Wave Solder Profile

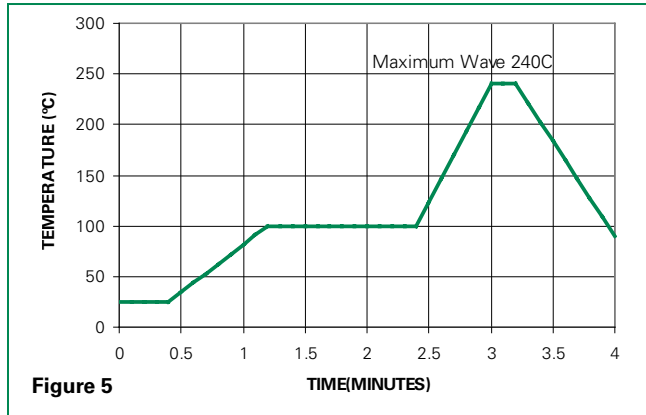

Lead-free Wave Solder Profile

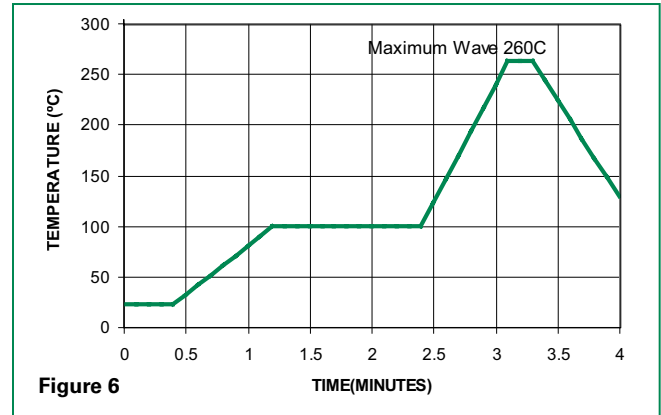

Physical Specifications

| | |
|----------------------------------|---|
| Lead Material | Copper Clad Steel Wire |
| Soldering Characteristics | Solderability per MIL-STD-202, Method 208E |
| Insulating Material | Cured, flame retardant epoxy polymer meets UL94V-0 requirements |
| Device Labeling | Marked with LF, voltage, UL/CSA Logos, and date code |

Environmental Specifications


| | |
|--------------------------------------|--|
| Operating/Storage Temperature | -55°C to +85°C/ -55°C to +125°C |
| Passive Aging | +85°C, 1000 hours +/-10% typical voltage change |
| Humidity Aging | +85°C, 85% RH, 1000 hours +/-10% typical voltage change |
| Thermal Shock | +85°C to -40°C 5 times +/-10% typical voltage change |
| Solvent Resistance | MIL-STD-202, Method 215F |
| Moisture Sensitivity | Level 1, J-STD-020C |

UltraMOV™ 25S Series Varistors for High-Temperature Operating Conditions:

Phenolic coated devices are available with improved maximum operating temperature 125°C. These devices also have improved temperature cycling capability. Ratings and specifications are per standard series except Hi-Pot Encapsulation (Isolation Voltage Capability) = 500V.

To order: add 'X1347' to part number (e.g. V25S150PX1347). These devices are NOT UL, CSA, CECC or VDE certified. Contact factory for further details.

Product Dimensions (mm)

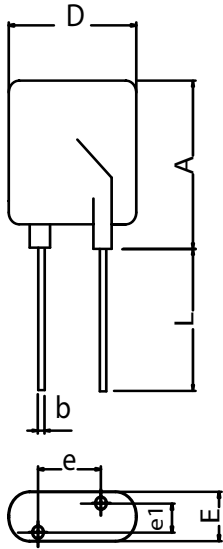

| | A max | b min | b max | D max | e min | e max | e1 min | e1 max | E max | L min |
|----------|-------------|-------------|-------------|-----------|-------------|-------------|-----------|-----------|----------|----------|
| V25S115P | | | | | | | 1.5 | 2.7 | 5.7 | 25.4 |
| V25S130P | | | | | | | 1.6 | 2.9 | 5.9 | |
| V25S140P | | | | | | | 1.7 | 3.0 | 6.0 | |
| V25S150P | | | | | | | 1.8 | 3.1 | 6.1 | |
| V25S175P | | | | | | | 1.9 | 3.3 | 6.3 | |
| V25S230P | | | | | | | 2.0 | 3.4 | 6.4 | |
| V25S250P | | | | | | | 2.1 | 3.5 | 6.5 | |
| V25S275P | | | | | | | 2.3 | 3.7 | 6.7 | |
| V25S300P | | | | | | | 2.4 | 3.9 | 6.9 | |
| V25S320P | 32.5 | 0.95 | 1.05 | 28 | 11.7 | 13.7 | 2.6 | 4.1 | 7.1 | |
| V25S385P | | | | | | | 3.0 | 4.7 | 7.7 | |
| V25S420P | | | | | | | 3.3 | 5.0 | 8.0 | |
| V25S440P | | | | | | | 3.4 | 5.2 | 8.2 | |
| V25S460P | | | | | | | 3.6 | 5.4 | 8.4 | |
| V25S510P | | | | | | | 1.6 | 3.4 | 8.7 | |
| V25S550P | | | | | | | 1.9 | 3.9 | 9.2 | |
| V25S625P | | | | | | | 2.3 | 4.3 | 9.6 | |
| V25S750P | | | | | | | 3.1 | 5.4 | 10.7 | |

Notes

1. Additional optional lead form, packaging and lead spacing requirements are subject to availability and to minimum order requirements. Please contact factory for details.
2. Nickel Barrier Wire option (Suffix 'X2855') Standard parts use Tin-Coated Copper wire. Nickel Barrier Coated Wire is available as an option. This is Copper Wire with a flashing of Nickel, followed by a top coat of Tin. To order please add suffix 'X2855' to end of standard part number. Contact factory for more details if required.
3. UltraMOV 25S have been qualified as type 1 application by UL1449 edition 3, which allows Permanent Connection between the secondary of the service transformer and the line side of the service equipment overcurrent device, as well as the load side, including watt-hour meter socket enclosures and intended to be installed without an external overcurrent protective device.