



- Cuts Easily, Neatly and Maintains a Fray Resistant End
- Expands For Ease Of Installation
- Cut And Abrasion Resistant
- Mil-202 & VW-1 Approved
- Halogen Free



Cut Cleanly
Scissors

Material
Polyethylene Terephthalate

Grade
CCF

Monofilament Diameter
.008"

Drawing Number
TF001CCF-WD

| Nominal Size | Part # | Expansion Range | | Bulk Spool | Shop Spool | Available Colors | Lbs/100' |
|--------------|---------|-----------------|---------|------------|------------|------------------|----------|
| | | Min | Max | | | | |
| 1/8" | CCF0.13 | 1/8" | 1/4" | 1,000' | 100' | 2 | 0.40 |
| 1/4" | CCF0.25 | 5/32" | 7/16" | 1,000' | 100' | 2 | 0.46 |
| 3/8" | CCF0.38 | 3/16" | 5/8" | 500' | 100' | 2 | 0.74 |
| 1/2" | CCF0.50 | 1/4" | 3/4" | 500' | 100' | 2 | 0.82 |
| 3/4" | CCF0.75 | 5/8" | 1" | 250' | 75' | 2 | 1.11 |
| 1" | CCF1.00 | 3/4" | 1 3/16" | 250' | 50' | 2 | 1.24 |
| 1 1/4" | CCF1.25 | 1" | 1 1/2" | 250' | 50' | 2 | 1.56 |
| 1 1/2" | CCF1.50 | 1 1/4" | 2" | 250' | 50' | 2 | 1.85 |

Scissor Cut For Field Installation, Will Not Support Combustion

CLEAN CUT FR has all of the same qualities that make our standard CC so easy to cut and install, with the added advantage of a flame inhibitor to provide an extra level of safety in certain applications.


Under normal conditions, Clean Cut FR will quickly self-extinguish and minimize flame spread and incidental damage to surrounding components.

The combination of flame retardance, ease of installation and nearly complete coverage makes CC an ideal solution for many industrial and engineering applications.

Cuts easily and neatly with regular scissors and maintains a fray resistant end during installation. When scissor cut, the end of CC will withstand heavier handling without fraying than standard PT.



Colors Available:
2 = TW & TB

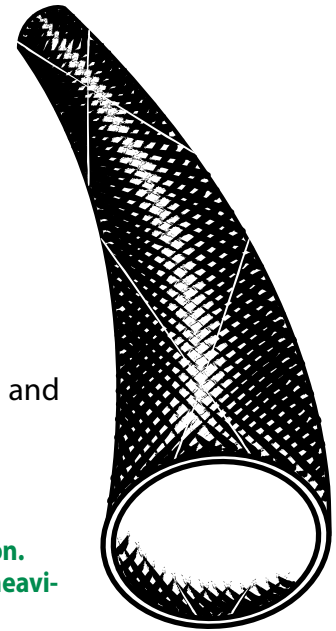

www.techflex.com
800.323.5140 • 973.300.9242 • fax: 973.300.9409
104 Demarest Road • Sparta, NJ 07871

ABYC FAR-25 VW-1





ABRASION FLAMMABILITY

Abrasion Resistance
Medium

Rating _____ *UL VW-1*

Abrasion Test Machine
Taber 5150

Abrasion Test Wheel
Calibrase H-18

Abrasion Test Load
500g

Room Temperature
80°F

Humidity
70%

Very Minor Scuffing
100 Test Cycles

Strands Frayed
And Rough Surface
400 Test Cycles

Scuffing And Several
Broken Strands
500 Test Cycles

Material Destroyed
700 Test Cycles

Pre-Test Weight
3,602.0 mg

Post-Test Weight
3,373.9 mg

Test End Loss Of Mass
Point Of Destruction
228.1 mg

CHEMICAL RESISTANCE


1=No Effect 4=More Affected
2=Little Effect 5=Severely Affected
3=Affected

| | |
|---|------|
| Aromatic Solvents _____ | 2 |
| Aliphatic Solvents _____ | 1 |
| Chlorinated Solvents _____ | 3 |
| Weak Bases _____ | 1 |
| Salts _____ | 1 |
| Strong Bases _____ | 2 |
| Salt Water <i>0-5-1926</i> _____ | 1 |
| Hydraulic Fluid <i>MIL-H-5606</i> _____ | 1 |
| Lube Oil <i>MIL-L-7808</i> _____ | 1 |
| De-Icing Fluid <i>MIL-A-8243</i> _____ | 1 |
| Strong Acids _____ | 3 |
| Strong Oxidants _____ | 2 |
| Esters/Ketones _____ | 2 |
| UV Light _____ | 1 |
| Petroleum _____ | 1 |
| Fungus <i>ASTM G-211</i> _____ | |
| Halogen Free _____ | Yes |
| RoHS _____ | Yes |
| SVHC _____ | None |

Melt Point
ASTM D-2117
482°F (250°C)

Maximum Continuous
Mil-I-23053
257°F (125°C)

Minimum Continuous
-94°F (-70°C)

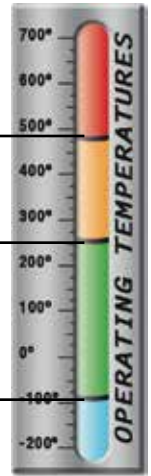

PHYSICAL PROPERTIES

| | |
|--|------------|
| Monofilament Diameter _____ | .008 |
| <i>ASTM D-204</i> | |
| Flammability Rating _____ | VW-1 |
| <i>FMVSS-302 Approved</i> | |
| Recommended Cutting _____ | Scissor/HK |
| Colors _____ | 2 |
| Wall Thickness _____ | .024 |
| Tensile Strength (Yarn) _____ | 4 |
| <i>ASTM D-2256 Lb</i> | |
| Specific Gravity <i>ASTM D-792</i> _____ | 1.38 |
| Moisture Absorption % _____ | .1-.2 |
| <i>ASTM D-570</i> | |
| Hard Vacuum Data _____ | |
| <i>ASTM E-595</i> | |
| TML _____ | .19 |
| CVCM _____ | .04 |
| WVR _____ | .06 |
| Smoke D-Max _____ | 275 |
| <i>ASTM E-66</i> | |
| Outgassing _____ | Med |
| Oxygen Index _____ | 31 |
| <i>ASTM D-2863</i> | |

www.techflex.com