

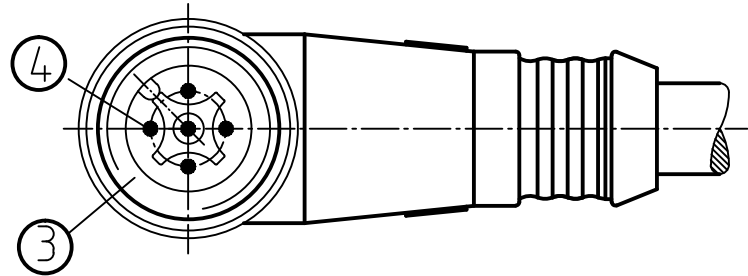


FINISHED LENGTH (SEE TABLE)

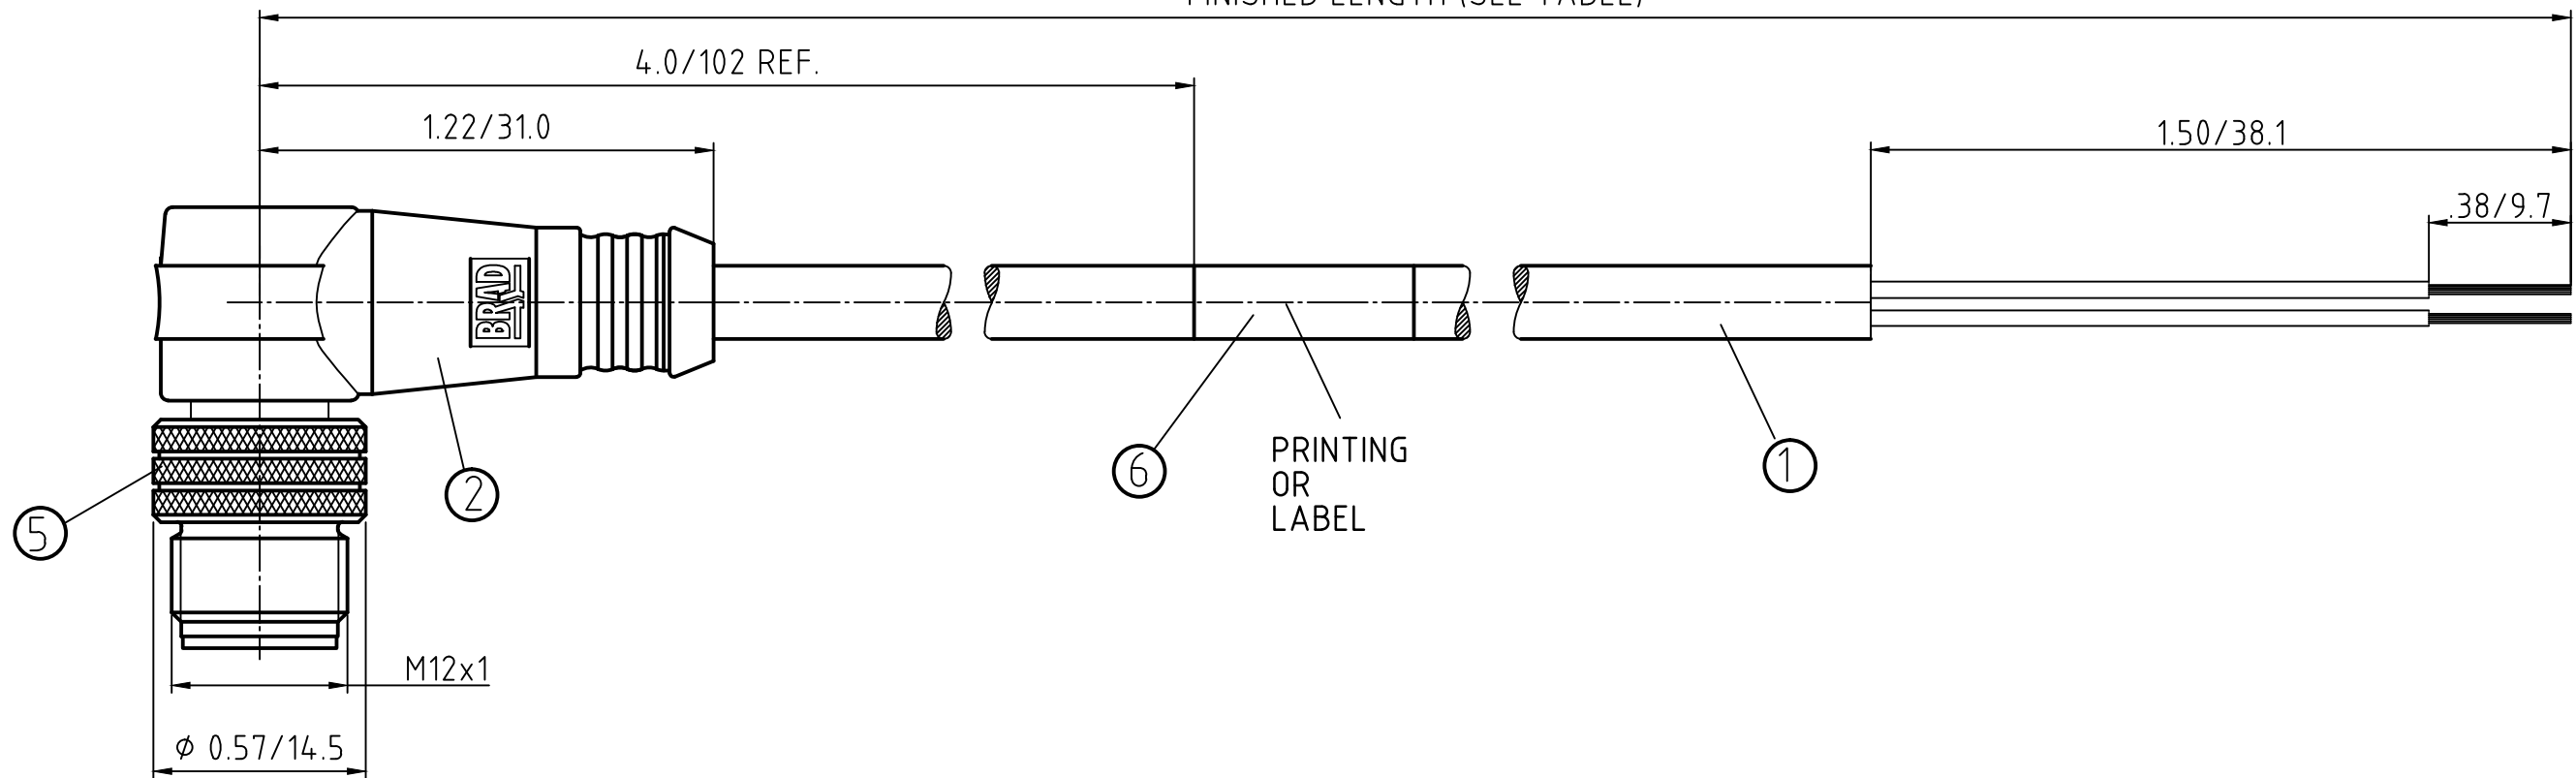

CONNECTOR SPECIFICATION:

VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	max. 4 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 105°C
UL CERTIFICATIONS	UL RECOGNIZED, FILE NO. E152210
ASSEMBLY IS	RoHS COMPLIANT

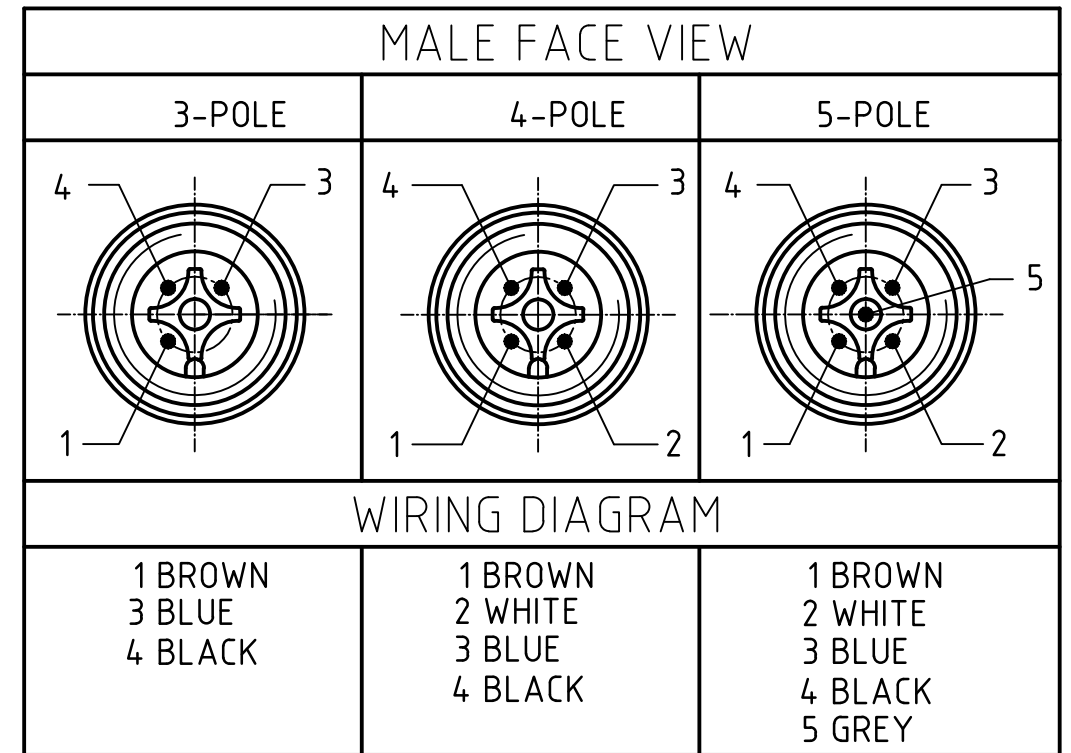

ITEM	COMPONENT	MATERIAL	FINISH
6	LABLE	MYLAR	BLACK/YELLOW
5	COUPLER	BRASS	NICKEL PLATED
4	PIN CONTACT	COPPER ALLOY	GOLD OVER NICKEL
3	INSERT	NYLON	BLACK
2	OVERMOLD	POLYURETHANE (PUR)	YELLOW
1	CABLE- 22/3-5 (COPPER STRANDING) 3/4/5 CONDUCT. 300V	JACKET: PVC	JACKET: YELLOW

ADDED PART NUMBER EC NO: IPG2014-1140 DRWN: GGUSTAFS 2013/12/17 CHKD: BARDEN APPR: BWOODMAN 2010/01/25	QUALITY SYMBOLS ▽ = 0 ◻ = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM	SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
		4 PLACES ± --- 3 PLACES ± --- 2 PLACES ±.13 1 PLACE ±.25	mm INCH	DRAWN BY DATE	CHECKED BY DATE	MICRO-CHANGE CORDSET 3/4/5-P. M 90 SINGLE KEY 22/3-5 YELLOW PVC CABLE		
		ANGULAR ± --- °	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	APPROVED BY DATE	MATERIAL NO. SEE TABLE SHEET 2	molex MOLEX INCORPORATED	DOCUMENT NO. SD-120065-029	SHEET NO. 1 OF 2
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
3	1200651497	803007A09M020	6.56' +3.5" -0 [2.0M +89 -0]
3	1200659208	803007A09M100	32.81' +12.5" -0 [10.0M +318 -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
4	1200651662	804007A09M020	6.56' +3.5" -0 [2.0M +89 -0]
4	1200651665	804007A09M040	13.12' +6.5" -0 [4.0M +165 -0]
4	1200651666	804007A09M050	16.40' +6.5" -0 [5.0M +165 -0]
4	1200651668	804007A09M060	19.69' +6.5" -0 [6.0M +165 -0]
4	1200651669	804007A09M100	32.81' +12.5" -0 [10.0M +318 -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
5	1200651724	805007A09M020	6.56' +3.5" -0 [2.0M +89 -0]
5	1200651726	805007A09M040	13.12' +6.5" -0 [4.0M +165 -0]
5	1200651727	805007A09M050	16.40' +6.5" -0 [5.0M +165 -0]
5	1200651728	805007A09M060	19.69' +6.5" -0 [6.0M +165 -0]
5	1200652123	805007A09M100	32.81' +12.5" -0 [10.0M +318 -0]

ADDED PART NUMBER EC NO.: IPG2014-1140 DRWN.: GGUSTAFS 2013/12/17 CHKD.: BARDEN APPR.: BWOODMAN 2010/01/25	QUALITY SYMBOLS 	GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <tr> <td></td> <td>mm</td> <td>INCH</td> </tr> <tr> <td>4 PLACES</td> <td>±.---</td> <td>±.---</td> </tr> <tr> <td>3 PLACES</td> <td>±.---</td> <td>±.005</td> </tr> <tr> <td>2 PLACES</td> <td>±.13</td> <td>±.010</td> </tr> <tr> <td>1 PLACE</td> <td>±.25</td> <td>±.020</td> </tr> <tr> <td colspan="3">ANGULAR ± --- °</td> </tr> </table>		mm	INCH	4 PLACES	±.---	±.---	3 PLACES	±.---	±.005	2 PLACES	±.13	±.010	1 PLACE	±.25	±.020	ANGULAR ± --- °			DIMENSION STYLE IN/MM DRAWN BY: _____ DATE: _____ CHECKED BY: _____ DATE: _____ RE: 2010/01/14 APPROVED BY: _____ DATE: _____ NSTAUDIG 2010/01/25	SCALE: NTS DESIGN UNITS: INCH THIRD ANGLE PROJECTION	MICRO-CHANGE CORDSET 3/4/5-P. M 90 SINGLE KEY 22/3-5 YELLOW PVC CABLE MOLEX INCORPORATED MATERIAL NO. SD-120065-029 DOCUMENT NO. SHEET NO. 2 OF 2
		mm	INCH																				
	4 PLACES	±.---	±.---																				
	3 PLACES	±.---	±.005																				
2 PLACES	±.13	±.010																					
1 PLACE	±.25	±.020																					
ANGULAR ± --- °																							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SEE TABLE	SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																				
REV: A																							