




## Dual Common-Cathode Schottky Rectifier



### FEATURES

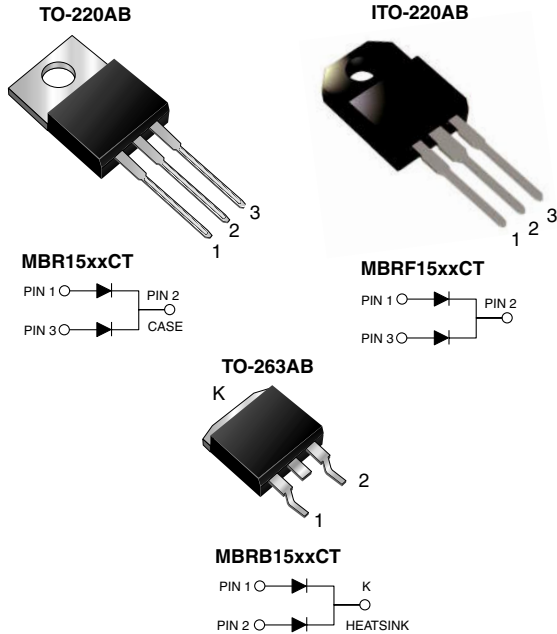

- Guardring for overvoltage protection
- Lower power losses, high efficiency
- Low forward voltage drop
- High forward surge capability
- High frequency operation
- Meets MSL level 1, per J-STD-020C (for TO-263AB package)
- Solder Dip 260 °C, 40 seconds
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC

### TYPICAL APPLICATIONS

For use in high frequency rectifier of switching mode power supplies, freewheeling diodes, dc-to-dc converters or polarity protection application.

### MECHANICAL DATA

**Case:** TO-220AB, ITO-220AB, TO-263AB

Epoxy meets UL 94V-0 flammability rating

**Terminals:** Matte tin plated leads, solderable per J-STD-002B and JESD22-B102D

E3 suffix for commercial grade, HE3 suffix for high reliability grade (AEC Q101 qualified)

**Polarity:** As marked

**Mounting Torque:** 10 in-lbs maximum

### MAJOR RATINGS AND CHARACTERISTICS

|                   |                |
|-------------------|----------------|
| $I_{F(AV)}$       | 7.5 A x 2      |
| $V_{RRM}$         | 35 V to 60 V   |
| $I_{FSM}$         | 150 A          |
| $V_F$             | 0.57 V, 0.65 V |
| $T_j \text{ max}$ | 150 °C         |

### MAXIMUM RATINGS ( $T_C = 25\text{ °C}$ unless otherwise noted)

| PARAMETER  | SYMBOL                   | MBR1535CT     | MBR1545CT | MBR1550CT | MBR1560CT | UNIT             |
|--|--------------------------|---------------|-----------|-----------|-----------|------------------|
| Maximum repetitive peak reverse voltage  | $V_{RRM}$                | 35            | 45        | 50        | 60        | V                |
| Working peak reverse voltage   | $V_{RWM}$                | 35            | 45        | 50        | 60        | V                |
| Maximum DC blocking voltage  | $V_{DC}$                 | 35            | 45        | 50        | 60        | V                |
| Maximum average forward rectified current at $T_C = 105\text{ °C}$                       | $I_{F(AV)}$ Total device | 15<br>7.5     |           |           |           | A                |
| Peak repetitive forward current at $T_C = 105\text{ °C}$ (rated $V_R$ , 20 kHz sq. wave) | $I_{FRM}$                | 15            |           |           |           | A                |
| Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load       | $I_{FSM}$                | 150           |           |           |           | A                |
| Peak repetitive reverse surge current per leg at $t_p = 2.0\text{ }\mu\text{s}$ , 1 kHz  | $I_{RRM}$                | 1.0           |           | 0.5       |           | A                |
| Voltage rate of change (rated $V_R$ )  | dv/dt                    | 10000         |           |           |           | V/ $\mu\text{s}$ |
| Operating junction temperature range   | $T_J$                    | - 65 to + 150 |           |           |           | °C               |
| Storage temperature range  | $T_{STG}$                | - 65 to + 175 |           |           |           | °C               |
| Isolation voltage (ITO-220AB only) From terminal to heatsink $t = 1$ minute              | $V_{AC}$                 | 1500          |           |           |           | V                |

| ELECTRICAL CHARACTERISTICS (T <sub>C</sub> = 25 °C unless otherwise noted)                |  |                |           |           |           |           |      |
|---|--|----------------|-----------|-----------|-----------|-----------|------|
| PARAMETER   | TEST CONDITIONS                                    | SYMBOL         | MBR1535CT | MBR1545CT | MBR1550CT | MBR1560CT | UNIT |
| Maximum instantaneous forward voltage per leg <sup>(1)</sup>                              | at I <sub>F</sub> = 7.5 A, T <sub>C</sub> = 25 °C  | V <sub>F</sub> | -         | -         | 0.75      | -         | V    |
|   | at I <sub>F</sub> = 7.5 A, T <sub>C</sub> = 125 °C |                | 0.57      | -         | 0.65      | -         |      |
|   | at I <sub>F</sub> = 15 A, T <sub>C</sub> = 25 °C   |                | 0.84      | -         | -         | -         |      |
|   | at I <sub>F</sub> = 15 A, T <sub>C</sub> = 125 °C  |                | 0.72      | -         | -         | -         |      |
| Maximum instantaneous reverse current at rated DC blocking voltage per leg <sup>(1)</sup> | T <sub>C</sub> = 25 °C                             | I <sub>R</sub> | 0.1       | -         | 1.0       | -         | mA   |
|   | T <sub>C</sub> = 125 °C                            |                | 15        | -         | 50        | -         |      |

**Note:**

(1) Pulse test: 300 μs pulse width, 1 % duty cycle

| THERMAL CHARACTERISTICS (T <sub>C</sub> = 25 °C unless otherwise noted) |                  |     |      |      |      |
|---|------------------|-----|------|------|------|
| PARAMETER   | SYMBOL           | MBR | MBRF | MBRB | UNIT |
| Maximum thermal resistance per leg                                      | R <sub>θJA</sub> | 60  | -    | 60   | °C/W |
|   | R <sub>θJC</sub> | 3.0 | 5.0  | 3.0  |      |

| ORDERING INFORMATION |                  |                 |              |               |               |
|----------------------|------------------|-----------------|--------------|---------------|---------------|
| PACKAGE              | PREFERRED P/N    | UNIT WEIGHT (g) | PACKAGE CODE | BASE QUANTITY | DELIVERY MODE |
| TO-220AB             | MBR1545CT-E3/45  | 1.85            | 45           | 50/Tube       | Tube          |
| ITO-220AB            | MBRF1545CT-E3/45 | 1.99            | 45           | 50/Tube       | Tube          |
| TO-263AB             | MBRB1545CT-E3/45 | 1.35            | 45           | 50/Tube       | Tube          |
| TO-263AB             | MBRB1545CT-E3/81 | 1.35            | 81           | 800/Reel      | Tape Reel     |

## RATINGS AND CHARACTERISTICS CURVES

(T<sub>A</sub> = 25 °C unless otherwise noted)

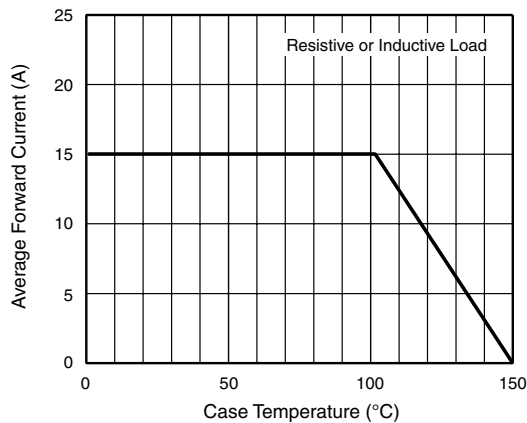


Figure 1. Forward Current Derating Curve

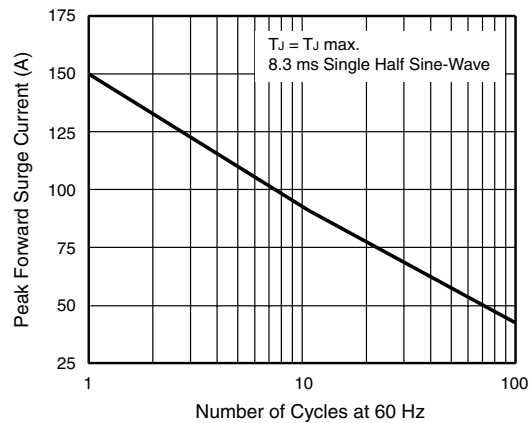


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current Per Leg



# MBR(F,B)1535CT thru MBR(F,B)1560CT

Vishay General Semiconductor

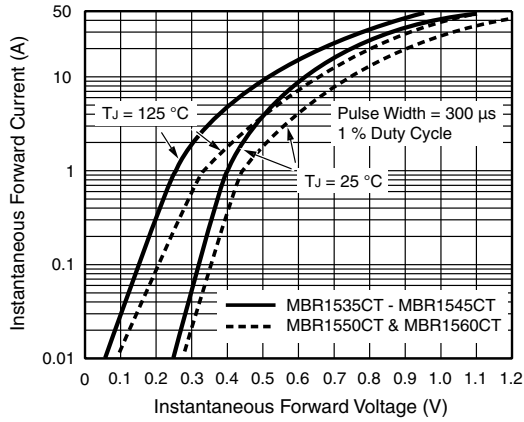


Figure 3. Typical Instantaneous Forward Characteristics Per Leg

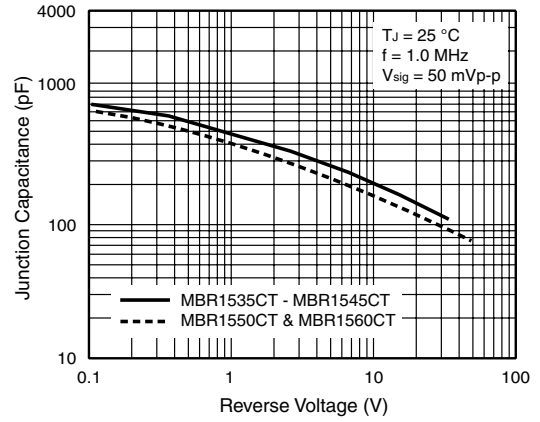


Figure 5. Typical Junction Capacitance Per Leg

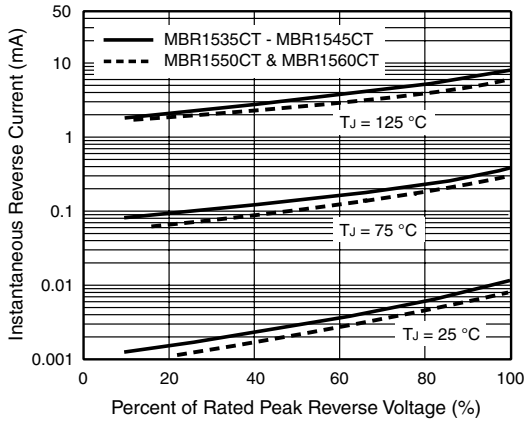


Figure 4. Typical Reverse Characteristics Per Leg

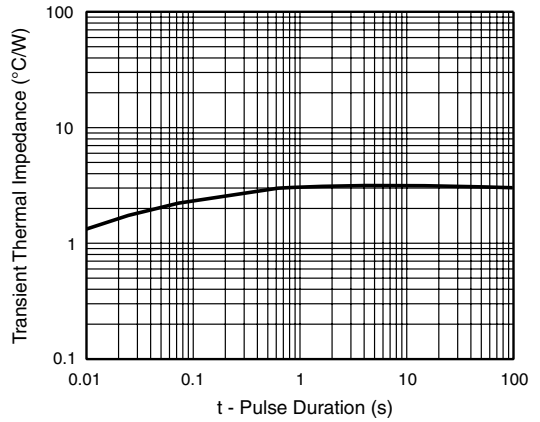


Figure 6. Typical Transient Thermal Impedance Per Leg


# MBR(F,B)1535CT thru MBR(F,B)1560CT

Vishay General Semiconductor




## PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

TO-220AB

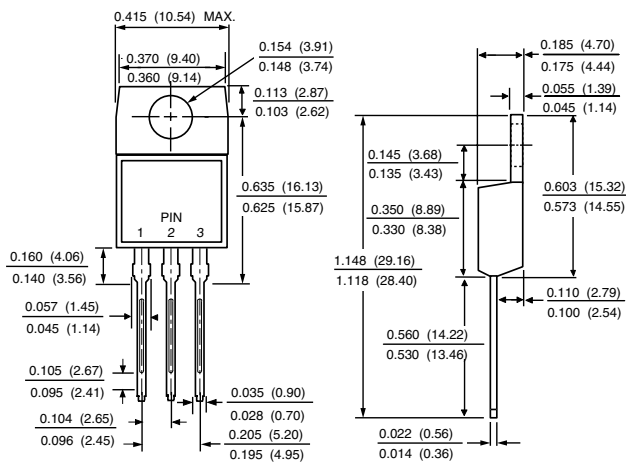


ITO-220AB

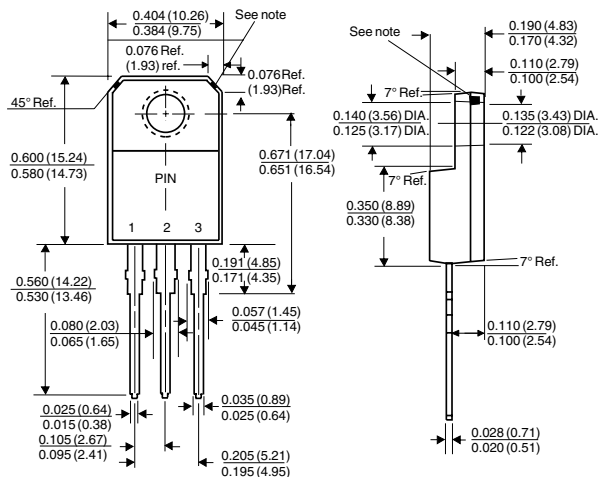


Note: Copper exposure is allowable for 0.005 (0.13) Max. from the body

TO-263AB

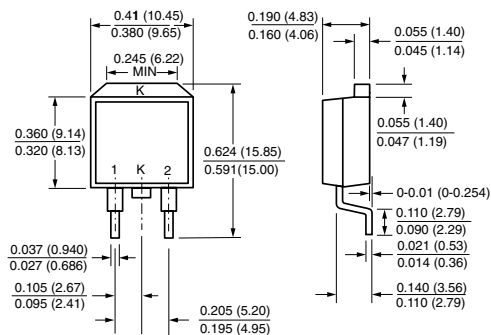

Mounting Pad Layout





## Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.