





RECOMMENDED PCB PATTERN

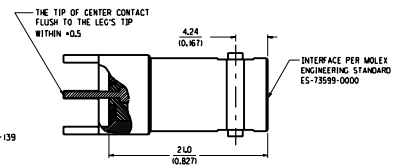

CONSTRUCTION :

BODY ---------- BRASS, PER ASTM-B-16
CENTER CONTACT -- PHOSPHOR BRONZE, PER ASTM-B-139
INSULATOR ------- TEFLON, PER ASTM-D-1710

FINISH :

BODY ---------- NICKEL PLATING
CENTER CONTACT -- GOLD PLATING (1 ±3 ˚u)

MECHANICAL & ELECTRICAL CHARACTERISTICS :

WORKING VOLTAGE : 500 VOLTS RMS MAX. AT SEA LEVEL
NOMINAL IMPEDANCE : 50 OHMS
FREQUENCY RANGE : 0-2 GHZ
TEMPERATURE RANGE : -20°C TO +85°C

PACKAGING

BULK PACK WITH PLASTIC BAG

LTR	REVISION RECORD	ECN	DR/CK	DATE
A	NEW RELEASE			

STANDARD ITEM ☒YES ☐NO

MATERIAL :
FINISH :
SCALE : 4:1 UNIT :
DRAWN BY : 94/1/27
CHK'D BY :
APPR'D BY : 94/1/28
SHEET 1 OF 1

MOLEX TAIWAN LTD. (R.F. DIVISION)

GENERAL TOLERANCES
ANGLE ± 0° DIM : .2W 0.0
DRW. NO. 35104-73400-0-03 REV A
TITLE : VERTICAL BNC (J)

DO NOT SCALE DRAWING
PROJECT NO.
SIMILAR ITEM
EDP NO.
ENG. NO.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX TAIWAN AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

MXT .50 - 13