




## FEET, CASTERS & GLIDES



**Adjustable Levelers**  
312 - 319, 324 - 335



**Furniture Casters**  
310 - 311



**Glides & Bumpers**  
332, 335 - 338



**Plate Casters**  
288 - 293, 298 - 300, 302 - 307



**Stem Casters**  
293 - 298, 303, 308



**Structural System Accessories**  
363 - 374



**Tube Connectors & Clamps**  
358 - 362



**Tube Insert Glides & Caps**  
347 - 348, 350 - 357



**Vibration Mounts**  
320 - 322, 339 - 345



**Wheels & Accessories**  
297 - 298, 300 - 301, 303



**PLATE CASTERS**

Wheel Type Description			
Phenolic	— Phenolic resin reinforced with macerated fabric for high capacity.	Polyurethane	— Polyurethane tread molded to grey polypropylene core.
Polyolefin	— Black molded polyolefin.	TPR Rubber	— Thermoplastic non-marking rubber tread on a polyolefin core.

**Institutional Casters Nickel Plated**  
**Medium Duty**  
**Applications: 375-450 Lbs.**




Plate Specifications	
Plate Type 97	
Overall Size	3 1/8 x 4 1/8
Hole Spacing	1 3/4 x 3 to 2 3/8 x 3 3/8
Hole Dia.	3/8 x 3/8 Slots
Bolt Dia.	5/16

Available in swivel, swivel with strap brake, and rigid casters with polyurethane and polyolefin treads and Delrin™ wheel bearings. NSF certified with swivel raceway dust covers and grease seals. Casters have a nickel finish.

Swivel w/Brake		Swivel		Rigid		Wheel Dia. x Width	Wheel Type	Capacity (Lbs.)	OAH
Item No.	Price Each	Item No.	Price Each	Item No.	Price Each				
WC-256	28.76	WC-254	25.94	WC-255	20.30	4 x 1 1/2	Polyurethane	375	5 3/8
WC-265	20.08	WC-263	19.16	WC-264	14.42	4 x 1 1/2	Polyolefin	375	5 3/8
WC-259	29.89	—	—	WC-258	19.56	5 x 1 1/2	Polyurethane	450	6 3/8
WC-268	21.11	WC-266	18.53	WC-267	16.92	5 x 1 1/2	Polyolefin	450	6 3/8
WC-262	27.95	WC-260	24.59	WC-261	21.22	6 x 1 1/2	Polyurethane	450	7 3/8
WC-271	22.04	WC-269	19.54	—	—	6 x 1 1/2	Polyolefin	450	7 3/8

**Institutional Casters Large Plate**  
**Medium Duty**  
**Applications: 375-450 Lbs.**






Plate Specifications	
Plate Type 99	
Overall Size	3 3/4 x 4 3/8
Hole Spacing	2 5/8 x 3 3/8 to 3 x 3
Hole Dia.	3/8 x 3/8 Slots
Bolt Dia.	5/16


Available in swivel, swivel with strap brake, and rigid casters with polyurethane, polyolefin, and phenolic treads and roller wheel bearings. NSF certified with swivel raceway dust cover. Casters have a clear zinc finish.

Swivel w/Brake		Swivel		Rigid		Wheel Dia. x Width	Wheel Type	Capacity (Lbs.)	OAH
Item No.	Price Each	Item No.	Price Each	Item No.	Price Each				
WC-274	29.89	WC-272	24.72	WC-273	21.42	4 x 1 1/2	Polyurethane	375	5 3/8
WC-283	21.62	WC-281	19.05	WC-282	15.96	4 x 1 1/2	Polyolefin	375	5 3/8
WC-292	23.69	WC-290	20.86	WC-291	15.96	4 x 1 1/2	Phenolic	450	5 3/8
WC-277	30.46	WC-275	27.62	WC-276	18.45	5 x 1 1/2	Polyurethane	450	6 3/8
WC-286	26.50	—	—	WC-285	16.71	5 x 1 1/2	Polyolefin	450	6 3/8
WC-295	22.65	WC-293	20.08	WC-294	16.99	5 x 1 1/2	Phenolic	450	6 3/8
WC-280	37.07	WC-278	31.92	WC-279	26.78	6 x 1 1/2	Polyurethane	450	7 3/8
WC-289	26.26	WC-287	22.14	WC-288	16.54	6 x 1 1/2	Polyolefin	450	7 3/8
WC-298	26.26	WC-296	22.14	WC-297	18.19	6 x 1 1/2	Phenolic	450	7 3/8

**Medium Heavy Duty**  
**Applications: 300-700 Lbs.**

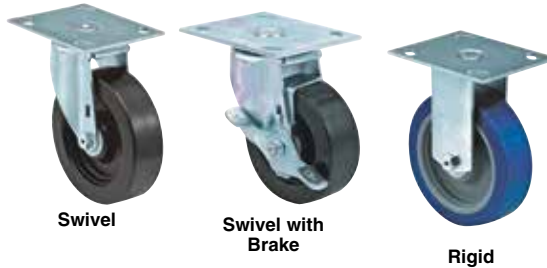

Top Plate A



Top Plate B

Plate Type	Plate Specifications	
	A	B
Overall Size	2 3/4 x 3 3/8	4 x 4 5/8
Hole Spacing	1 3/4 x 2 1/2 to 3	2 5/8 x 3 3/8 to 3 x 3
Hole Dia.	1 1/2 x 1 3/8 slots	3/8 x 3/8 slots
Bolt Dia.	5/16	3/8

Available as swivel, rigid, or swivel with total lock brake, which simultaneously locks wheel and swivel. High strength double ball, hardened raceways. Roller bearing wheel and 1/2" nut and bolt axle with grease zerk fitting.



Swivel w/ Brake		Swivel		Rigid		Top Plate Style	Wheel Dia. x Width	Wheel Type	Capacity (Lbs.)	OAH
Item No.	Price Each	Item No.	Price Each	Item No.	Price Each					
WC-1	30.78	WC-3	26.20	WC-5	19.01	A	4 x 2	TPR Rubber	300	5 3/8
—	—	WC-4	25.60	WC-6	18.84	B	4 x 2	TPR Rubber	300	5 3/8
WC-19	35.07	WC-21	28.72	WC-23	20.29	A	4 x 2	Polyurethane	600	5 3/8
WC-20	35.73	WC-22	29.41	WC-24	21.97	B	4 x 2	Polyurethane	600	5 3/8
WC-37	30.83	—	—	WC-41	17.05	A	4 x 2	Polyolefin	400	5 3/8
WC-38	31.46	WC-40	24.30	WC-42	22.24	B	4 x 2	Polyolefin	400	5 3/8
WC-55	30.14	WC-57	23.59	WC-59	14.66	A	4 x 2	Phenolic	600	5 3/8
WC-56	31.22	WC-58	22.17	WC-60	15.39	B	4 x 2	Phenolic	600	5 3/8
WC-7	32.79	—	—	WC-11	19.04	A	5 x 2	TPR Rubber	350	6 1/2
WC-8	41.80	WC-10	28.22	—	—	B	5 x 2	TPR Rubber	350	6 1/2
WC-25	35.83	WC-27	29.54	WC-29	21.69	A	5 x 2	Polyurethane	650	6 1/2
WC-26	34.73	WC-28	30.23	WC-30	20.42	B	5 x 2	Polyurethane	650	6 1/2
—	—	WC-63	22.65	—	—	A	5 x 2	Phenolic	650	6 1/2
WC-62	30.44	—	—	WC-66	16.79	B	5 x 2	Phenolic	650	6 1/2
—	—	—	—	WC-47	17.39	A	5 x 2	Polyolefin	450	6 1/2
WC-13	36.66	WC-15	34.39	—	—	A	6 x 2	TPR Rubber	400	7 1/2
WC-31	34.85	WC-33	29.21	WC-35	21.94	A	6 x 2	Polyurethane	700	7 1/2
WC-32	35.00	WC-34	32.68	WC-36	24.70	B	6 x 2	Polyurethane	700	7 1/2
WC-50	32.90	WC-52	32.21	—	—	B	6 x 2	Polyolefin	560	7 1/2
WC-67	29.81	WC-69	23.95	WC-71	17.90	A	6 x 2	Phenolic	700	7 1/2
WC-68	31.73	—	—	WC-72	17.78	B	6 x 2	Phenolic	700	7 1/2

PLATE CASTERS

Wheel Type Description			
Soft Rubber	— Black soft rubber tread molded to black hard rubber core.	Hard Rubber	— Black hard rubber tread molded to black hard rubber core.
Polyurethane	— Polyurethane tread molded to gray polypropylene core.	TPR Rubber	— Thermoplastic non-marking rubber tread on polyolefin core.
Polyolefin	— Black molded polyolefin.		

**Institutional Casters Small Plate  
Medium Duty**  
Applications: 225-300 Lbs.



Swivel



Swivel with Brake




Plate Specifications	
Plate Type AM	
Overall Size	2 3/8 x 3 3/8
Hole Spacing	1 3/4 x 2 5/8 to 3
Hole Dia.	1 1/2 x 1/2 Slots
Bolt Dia.	7/16

Available in swivel, swivel with strap brake, and rigid casters with TPR rubber donut and polyurethane treads and precision ball wheel bearings. Casters have a clear zinc finish. NSF certified with swivel raceway dust covers.



Rigid

Swivel		Swivel w/Brake		Rigid		Wheel Dia. x Width	Wheel Type	Capacity (Lbs.)	OAH
Item No.	Price Each	Item No.	Price Each	Item No.	Price Each				
WC-248	12.40	WC-249	13.39	WC-250	10.73	4 x 1 1/4	Polyurethane	275	5 1/4
—	—	WC-243	15.63	WC-244	13.41	5 x 1 1/4	TPR Rubber	250	6 1/4
WC-251	12.48	WC-252	15.79	WC-253	11.92	5 x 1 1/4	Polyurethane	300	6 1/4


# NEW VIBRATION MOUNTS

Pages 342 - 343

**PLATE CASTERS**

Wheel Type Description			
Phenolic	— Phenolic resin reinforced with macerated fabric for high capacity.	Hard Rubber	— Black hard rubber tread molded to black hard rubber core.
Polyurethane	— Polyurethane tread molded to gray polypropylene core.	Urethane	— Gray non-marking polyurethane tread on polyolefin hub with ball bearings and thread guards.
Rubber	— Gray Thermoplastic, non-marking rubber tread on polyolefin hub with ball bearings and thread guards.	Polypropylene	— Black molded polypropylene.
Polyolefin	— Black molded polyolefin.		

**Light Medium Duty Ball Bearings**  
Applications: 110-220 Lbs.



Top Plate

Plate Specifications	
Swivel Overall Size	2 3/4 x 3 3/4
Rigid Overall Size	3 x 3 3/4
Hole Spacing	1.77 x 2.95
Hole Dia.	2.05 x 2.84 slots
Bolt Dia.	5/16



Swivel with Total Lock Brake



Swivel



Rigid

Available in swivel, rigid or swivel with total lock brake which locks both wheel and swivel. Wheels have thread guards to protect against fabric threads.

Swivel w/ Brake		Swivel		Rigid		Wheel Dia. x Width	Wheel Type	Capacity (Lbs.)	OAH
Item No.	Price Each	Item No.	Price Each	Item No.	Price Each				
WC-73	26.03	WC-74	20.79	—	—	3 x 1 1/4	Rubber	110	4 3/16
WC-82	24.95	—	—	—	—	3 x 1 1/4	Urethane	110	4 3/16
WC-79	31.66	—	—	—	—	5 x 1 1/4	Rubber	220	6 7/16
WC-88	29.84	—	—	WC-90	18.90	5 x 1 1/4	Urethane	220	6 7/16

**Low Profile Medium Duty**  
Applications: 300-500 Lbs.



Swivel



Swivel w/ Brake



Rigid




Plate Specifications			
Plate Type	AM	00	97
Overall Size	2 3/4 x 3 3/4	2 3/4 x 3 3/4	3 1/2 x 4 1/2
Hole Spacing	1 1/4 x 2 5/8 to 3	1 3/4 x 3	1 3/4 x 3 to 2 5/8-3-3/8
Hole Dia.	1 1/32 x 1/2 slots	1 1/32	5/8 x 3/4 slots
Bolt Dia.	5/16	5/16	5/16

Double row swivel construction. 3/8" diameter nut and bolt axle. Zinc plated finish.

Swivel		Swivel w/ Brake		Rigid		Wheel Type	Wheel Dia. x Width	Capacity (Lbs.)	Bearing	OAH	Plate Type
Item No.	Price Each	Item No.	Price Each	Item No.	Price Each						
WC-1509-140	9.30	—	—	—	—	Hard Rubber	2 1/2 x 1 13/16	300	Delrin	3 1/2	97
WC-1509-150	9.30	—	—	—	—	Hard Rubber	2 1/2 x 1 13/16	300	Delrin	3 1/2	97
WC-1527-110	7.41	—	—	—	—	Polyolefin	2 1/2 x 1 3/4	300	Plain	3 1/2	00
WC-1538-100	12.98	—	—	—	—	Phenolic Resin	2 5/8 x 1 3/4	350	Roller	3 5/16	00
WC-1509-130	8.37	—	—	—	—	Hard Rubber	2 x 1 13/16	200	Delrin	2 13/16	97
WC-1527-100	7.76	—	—	—	—	Polypropylene	2 x 1 1/2	350	Plain	2 13/16	97
—	—	WC-1538-125	12.60	—	—	Phenolic Resin	3 x 1 3/4	500	Roller	3 3/8	AM
—	—	WC-1538-140	14.42	—	—	Phenolic Resin	3 x 1 13/16	500	Roller	3 3/8	97
WC-1538-115	12.61	—	—	—	—	Phenolic Resin	3 x 1 13/16	500	Roller	3 3/8	00
WC-1527-160	7.73	—	—	—	—	Polyolefin	3 x 1 3/4	350	Sintered	3 3/8	00
WC-1527-170	10.41	—	—	—	—	Polyolefin	3 x 1 3/4	350	Roller	3 3/8	00
WC-1527-180	10.59	—	—	—	—	Polyolefin	3 x 1 3/4	350	Roller	3 3/8	97
WC-1538-110	15.83	—	—	—	—	Polypropylene	3 x 1 3/4	500	Roller	3 3/8	97
—	—	—	—	WC-1509-180	7.56	Hard Rubber	2 1/2 x 1 3/4	450	Precision	3 3/8	00
—	—	—	—	WC-1525-060	13.87	Polyurethane	3 x 1 3/4	450	Precision	3 3/8	00

PLATE CASTERS

Wheel Type Description			
Phenolic	— Phenolic resin reinforced with macerated fabric for high capacity.	Hard Rubber	— Black hard rubber tread molded to black hard rubber core.
Polyurethane	— Polyurethane tread molded to gray polypropylene core.	Soft Rubber	— Black soft rubber tread molded to a black hard rubber core.
Polyolefin	— Black molded polyolefin.	Polypropylene	— Black molded polypropylene.

**General Purpose Casters**  
**Medium Duty**  
**Applications: 200-400 Lbs.**




Plate Specifications			
Plate Type	00	97	98
Overall Size	2 3/4 x 3 3/4	3 1/8 x 4 1/8	3 1/8 x 4 1/8
Hole Spacing	1 3/4 x 3	1 3/4 x 3 to 2 3/8 x 3 3/8	2 3/8 x 3 1/16
Hole Dia.	1 1/32	3/8 x 34 slots	1 1/32
Bolt Dia.	7/16	7/16	7/16



Swivel



Swivel w/ Brake



Rigid

Double row swivel construction. 3/8" diameter nut and bolt axle. Zinc plated finish.

Swivel w/ Brake		Swivel		Rigid		Wheel Type	Wheel Dia. x Width	Capacity (Lbs.)	Bearing	OAH	Plate Type
Item No.	Price Each	Item No.	Price Each	Item No.	Price Each						
WC-1204-020	13.67	—	—	WC-1204-010	13.98	Soft Rubber	4 x 1 3/8	200	Delrin	5 1/16	98
—	—	WC-1227-130	7.50	WC-1227-110	8.22	Polyolefin	4 x 1 3/8	300	Plain	5 1/16	00
—	—	WC-1227-140	7.72	—	—	Polyolefin	4 x 1 3/8	300	Plain	5 1/16	97
—	—	WC-1227-160	8.16	—	—	Polyolefin	5 x 1 3/8	350	Plain	6 1/16	00
—	—	WC-1227-190	9.25	—	—	Polyolefin	6 x 1 3/8	400	Delrin	7 1/16	97
—	—	WC-1227-200	9.26	—	—	Polypropylene	6 x 1 3/8	400	Delrin	7 1/16	98
—	—	—	—	WC-1227-180	9.70	Polyolefin	6 x 1 3/8	400	Plain	7 1/16	97


**Low Profile Medium**  
**Applications: 200 - 500 Lbs.**



Swivel



Rigid



Top Plate

Plate Specifications	
Overall Size	3 1/8 x 4 1/8
Hole Spacing	1 3/4 x 3 to 2 3/8 x 3 3/8
Hole Dia.	3/8 x 34 slots
Bolt Dia.	7/16

Swivel		Rigid		Wheel Dia. x Width	Wheel Type	Bearing	Capacity (Lbs.)	OAH
Item No.	Price Each	Item No.	Price Each					
WC-91	13.37	WC-92	7.96	2 x 1 1/16	Hard Rubber	Delrin	200	2 7/8
WC-93	13.69	WC-94	8.19	2 1/2 x 1 1/16	Hard Rubber	Delrin	300	3 1/16
WC-95	13.95	WC-96	8.50	3 x 1 1/16	Hard Rubber	Delrin	350	3 3/8
WC-97	14.31	—	—	3 x 1 3/4	Polyolefin	Sintered	350	3 3/8
WC-99*	19.24	—	—	3 x 1 3/4	Phenolic	Roller	500	3 3/8

\*Single Wheel

**General Purpose**  
**Light-Medium Duty**  
**Applications: 125-280 Lbs.**



Swivel



Rigid




Plate Specifications	
Plate Type 97	
Overall Size	3 1/8 x 4 1/8
Hole Spacing	1 3/4 x 3 to 2 3/8 x 3 3/8
Hole Dia.	3/8 x 34 Slots
Bolt Dia.	7/16

Available in swivel and rigid casters with soft rubber and polyurethane wheels with Delrin® bearings, polyolefin wheels with plain bearings. Casters have a clear zinc finish. Brake kit available for swivel casters.

Swivel		Rigid		Wheel Dia. x Width	Wheel Type	Capacity (Lbs.)	OAH
Item No.	Price Each	Item No.	Price Each				
WC-218	7.20	WC-219	5.66	3 x 1 1/4	Soft Rubber	125	3 3/4
WC-224	7.79	WC-225	6.90	3 x 1 1/4	Polyurethane	210	3 3/4
WC-230	6.37	WC-231	6.01	3 x 1 1/4	Polyolefin	210	3 3/4
WC-220	8.06	—	—	4 x 1 1/4	Soft Rubber	165	4 1/16
WC-226	8.09	WC-227	9.13	4 x 1 1/4	Polyurethane	275	4 1/16
WC-232	9.01	—	—	4 x 1 1/4	Polyolefin	255	4 1/16
WC-222	9.88	—	—	5 x 1 1/4	Soft Rubber	190	5 3/8
WC-228	12.4	WC-229	10.16	5 x 1 1/4	Polyurethane	280	5 3/8
WC-234	8.49	WC-235	9.26	5 x 1 1/4	Polyolefin	280	5 3/8

**PLATE CASTERS**

Wheel Type Description			
Phenolic	— Phenolic resin reinforced with macerated fabric for high capacity.	Hard Rubber	— Black hard rubber tread molded to black hard rubber core.
Polyurethane	— Polyurethane tread molded to gray polypropylene core.	Soft Rubber	— Black soft rubber tread molded to black hard rubber core.
Polyolefin	— Black molded polyolefin.	TPR Rubber	— Thermoplastic non-marking rubber tread on polyolefin core.
Polypropylene	— Black molded polypropylene.		

**Industrial Casters**  
**Light-Medium Duty**  
**Applications: 125-280 Lbs.**



Plate Specifications					
Plate Type	AM	00	97	98	T30
Overall Size	2 3/4 x 3 3/4	2 3/4 x 3 3/4	3 1/2 x 4 1/2	3 1/2 x 4 1/2	2 3/4 x 3 3/4
Hole Spacing	1 1/4 x 2 5/8 to 3	1 3/4 x 3	1 3/4 x 3 to 2 3/8-3-3/8	2 3/8 x 3 3/8	1 3/4 x 2 5/8 to 3
Hole Dia.	1 1/2 x 1/2 slots	1 1/2	3/8 x 3/4 slots	1 1/2	1 1/2 x 1/2
Bolt Dia.	5/16	5/16	5/16	5/16	5/16

Double row swivel construction. 5/16" diameter nut and bolt axle. Zinc plated finish.



Swivel		Swivel w/ Brake		Wheel Type	Wheel Dia. x Width	Capacity (Lbs.)	Bearing	OAH	Plate Type
Item No.	Price Each	Item No.	Price Each						
WC-2909-120	5.66	—	—	TPR Rubber	2 1/2 x 1 1/2	175	Sintered	3 7/16	00
WC-2909-140	5.98	—	—	Hard Rubber	2 1/2 x 1 1/2	175	Sintered	3 7/16	97
WC-2904-110	5.64	WC-2904-150	6.59	Soft Rubber	3 x 1 1/4	125	Delrin	3 3/4	00
WC-2904-100	5.86	—	—	Soft Rubber	3 x 1 1/4	125	Delrin	3 3/4	AM
WC-2909-180	6.45	WC-2909-160	7.41	Hard Rubber	3 x 1 1/4	210	Delrin	3 3/4	97
WC-2927-110	4.82	WC-2927-120	5.77	Polyolefin	3 x 1 1/4	210	Plain	3 3/4	00
WC-2927-100	5.21	—	—	Polyolefin	3 x 1 1/4	210	Plain	3 3/4	98
—	—	WC-2927-130	7.26	Polyolefin	3 x 1 1/4	210	Plain	3 3/4	97
WC-2904-120	5.52	—	—	Soft Rubber	3 x 1 1/4	125	Delrin	3 3/4	00
WC-2909-200	5.98	—	—	Hard Rubber	3 x 1 1/4	210	Delrin	3 3/4	00
WC-2909-220	6.20	—	—	Hard Rubber	3 x 1 1/4	210	Delrin	3 3/4	AM
WC-2925-100	6.96	—	—	Polyurethane	3 x 1 1/4	210	Delrin	3 3/4	00
WC-2926-100	6.91	—	—	TPR Rubber	3 x 1 1/4	210	Delrin	3 3/4	98
WC-2938-100	7.23	—	—	Phenolic	3 x 1 1/4	250	Plain	3 3/4	00
WC-2927-200	5.40	WC-2927-210	6.35	Polyolefin	4 x 1 1/4	255	Plain	4 1 1/16	00
WC-2927-220	5.27	—	—	Polyolefin	4 x 1 1/4	255	Plain	4 1 1/16	00
WC-2909-400	7.99	WC-2909-380	8.90	Hard Rubber	5 x 1 1/4	280	Delrin	5 5/8	00
—	—	WC-2927-230	7.60	Polyolefin	5 x 1 1/4	280	Plain	5 5/8	00
WC-2904-190	9.71	—	—	Soft Rubber	5 x 1 1/4	190	Delrin	5 5/8	98
WC-2909-420	8.32	—	—	Hard Rubber	5 x 1 1/4	280	Delrin	5 5/8	97
WC-3286-10	6.57	—	—	Polypropylene	5 x 1 5/16	135	Plain	6 1/16	T30
WC-3286-20	7.34	—	—	TPR Rubber	5 x 1 5/16	135	Plain	6 1/16	—

**Industrial Casters**  
**Light Duty**  
**Applications: 100-135 Lbs.**



Plate Specifications	
Plate Type 00	
Overall Size	2 3/4 x 3 3/4
Hole Spacing	1 3/4 x 3
Hole Dia.	1 1/2
Bolt Dia.	5/16

Double row swivel construction. 5/16" diameter nut and bolt axle. Zinc plated finish. Available in swivel plate and swivel plate with brakes. 1" wheel tread width.

Swivel w/ Brake		Swivel		Rigid		Wheel Type	Wheel Dia. x Width	Capacity (Lbs.)	Bearing	OAH	Plate Type
Item No.	Price Each	Item No.	Price Each	Item No.	Price Each						
WC-2604-140	6.68	WC-2604-100	5.66	—	—	Soft Rubber	3 x 1	100	Delrin	3 3/16	00
—	—	—	—	WC-1604-100	4.31	Soft Rubber	3 x 1	100	Delrin	3 13/16	00
WC-2609-110	6.30	WC-2609-100	5.28	—	—	Hard Rubber	3 x 1	125	Delrin	3 3/16	00
—	—	WC-2627-110	7.05	—	—	Polyolefin	3 x 1	125	Plain	3 3/4	00
—	—	WC-2626-100	7.19	—	—	TPR Rubber	4 x 1	135	Plain	4 13/16	00

**Small Single Wheel Furniture Casters**  
**Light Duty**  
**Applications: 75-115 Lbs.**




Plate Specifications	
Plate Type 92	
Overall Size	1 3/4 x 2
Hole Spacing	1 3/16 x 1 1/16
Hole Dia.	1 3/64
Bolt Dia.	1/4

Item No.	Wheel Dia. x Width	Wheel Type	Finish	Capacity (Lbs.)	OAH	Price Each
WC-383	2 x 1 3/16	Hard Rubber	Chrome	100	2 5/8	7.73
WC-412	2 x 1 3/16	Soft Rubber	Nickel	75	2 5/8	7.75

PLATE CASTERS

Wheel Type Description			
Soft Rubber	— Black soft rubber tread molded to black hard rubber core.	Hard Rubber	— Black hard rubber tread molded to black hard rubber core.
TPR Rubber	— Thermoplastic non-marking rubber tread on a polyolefin core.	Polyolefin	— Black molded polyolefin.

**Furniture Casters**  
**Light Duty**  
**Applications: 75-100 Lbs.**




Plate Specifications		
Plate Type	92	93
Overall Size	1 3/16 x 2	1 29/32 x 2 5/8
Hole Spacing	1 3/16 x 1 1/16	1 5/16 x 2 1/8
Hole Dia.	1/4	9/32
Bolt Dia.	#10 Screw	1/4

Double row swivel construction. 1/4" diameter rivet axle. Zinc plated finish. Available in swivel plate and swivel plate with brake.

Swivel		Swivel w/ Brake		Wheel Type	Wheel Dia. x Width	Capacity (Lbs.)	Bearing	OAH	Plate Type
Item No.	Price Each	Item No.	Price Each						
WC-9427-30	2.31	—	—	Polyolefin	2 x 3/4	100	Plain	2 5/8	92
WC-9427-35	2.18	—	—	Polyolefin	2 x 3/4	100	Plain	2 5/8	93
WC-9426-10	2.50	WC-9426-20	3.14	TPR Rubber	2 x 1 3/16	75	Plain	2 5/8	92
WC-9409-10	2.63	—	—	Hard Rubber	2 x 1 3/16	100	Delrin	2 5/8	93
WC-9427-25	2.29	—	—	Polyolefin	2 x 3/4	100	Plain	2 5/8	92
WC-9404-55	6.50	WC-9404-60	7.74	Soft Rubber	2 1/2 x 1 1/16	90	Delrin	2 5/8	92

**Furniture Casters - Low Profile Rigid**  
**Light Duty**  
**Applications: 60-75 Lbs.**



**Furniture Caster - Low Profile Utility**  
**Light Duty**  
**Applications: 20 Lbs.**



Rigid



Swivel



Plate Specifications	
Plate Type	T1
Overall Size	1 3/16 X 1 1/4
Hole Spacing	1 3/16 X 1 3/8
Hole Dia.	3/16

1/4" diameter rivet axle. Zinc plated finish. Recommended for day beds, studio couches and camper door guard applications.

Top ball bearing raceway. 1/4" diameter rivet axle. Zinc plated finish. Recommended for light home furniture, humidifiers, canister vacuums and planter dollies.


Item No.	Wheel Type	Wheel Dia. x Width	Capacity (Lbs.)	Bearing	OAH	Mounting Plate	Price Each
WC-9427-45	Polyolefin	2 x 3/4	75	Delrin	2 1/16	1 3/16 x 1 7/16	1.54

Item No.	Wheel Type	Wheel Dia. x Width	Capacity (Lbs.)	Bearing	OAH	Plate Type	Price Each
WC-9227-10	Polyolefin	1 1/4 x 1/2	20	Plain	1 7/16	T1	0.56

**Light - Medium Duty**  
**Applications: 125-280 Lbs.**



Swivel Threaded Stem



Friction Ring Stem Threaded Stem

Item No.	D	L	Wheel Dia. x Width	Wheel Type	Capacity (Lbs.)	OAH	Price Each
<b>Friction Ring Stem</b>							
WC-121	3/16	1 3/8	3 x 1 1/4	Soft Rubber	125	3 3/8	8.61
WC-124	3/16	1 3/8	3 x 1 1/4	Polyolefin	210	3 3/8	7.67
WC-125	3/16	1 3/8	4 x 1 1/4	Polyolefin	255	4 1/8	9.51
WC-126	3/16	1 3/8	5 x 1 1/4	Polyolefin	280	5 1/2	10.02
<b>Threaded Stem</b>							
WC-127	3/8-16	1 1/2	3 x 1 1/4	Soft Rubber	125	3 3/8	8.93
WC-128	3/8-16	1 1/2	4 x 1 1/4	Soft Rubber	165	4 1/2	9.53
WC-130	1/2-13	1 1/2	3 x 1 1/4	Soft Rubber	125	3 3/8	8.75
WC-131	1/2-13	1 1/2	4 x 1 1/4	Soft Rubber	165	4 1/2	10.11
WC-133	3/8-16	1 1/2	3 x 1 1/4	Polyolefin	210	3 3/8	10.56
WC-134	3/8-16	1 1/2	4 x 1 1/4	Polyolefin	255	4 1/2	10.15
WC-135	3/8-16	1 1/2	5 x 1 1/4	Polyolefin	280	5 1/2	9.60
WC-136	1/2-13	1 1/2	3 x 1 1/4	Polyolefin	210	3 3/8	9.01
WC-137	1/2-13	1 1/2	4 x 1 1/4	Polyolefin	255	4 1/2	8.75
WC-138	1/2-13	1 1/2	5 x 1 1/4	Polyolefin	280	5 1/2	10.72
WC-140				Brake Kit			4.67



**STEM CASTERS**

Wheel Type Description			
Soft Rubber	— Black soft rubber tread molded to black hard rubber core.	Hard Rubber	— Black hard rubber tread molded to black hard rubber core.
TPR Rubber	— Thermoplastic non-marking rubber tread on a polyolefin core.	Polyolefin	— Black molded polyolefin.
Polypropylene	— Black molded Polypropylene.		

**Industrial Casters**  
Light-Medium Duty  
Applications: 125-280 Lbs.




Swivel Threaded Stem


Swivel w/ Brake Threaded Stem

Swivel w/ Brake Friction Ring Stem

Swivel Friction Ring Stem



Friction Ring Stem



Threaded Stem

Double row swivel construction. 3/8" diameter nut and bolt axle. Zinc plated finish.

Swivel w/ Brake		Swivel		Wheel Type	Wheel Dia. x Width	Capacity (Lbs.)	Bearing	OAH	D	L
Item No.	Price Each	Item No.	Price Each							
<b>Friction Ring Stem</b>										
WC-2926-130	6.18	—	—	TPR Rubber	3 x 1 1/4	210	Delrin	3 3/8	7/16	1 3/8
—	—	WC-2909-260	5.04	Hard Rubber	3 x 1 1/4	210	Delrin	3 3/8	7/16	1 29/32
—	—	WC-2904-170	6.99	Soft Rubber	4 x 1 1/4	165	Delrin	4 1/2	1 3/16	1 3/4
<b>Threaded Stem</b>										
—	—	WC-2904-130	4.16	Soft Rubber	3 x 1 1/4	125	Delrin	2 3/8	3/8	1
—	—	WC-2904-140	5.35	Soft Rubber	3 x 1 1/4	125	Delrin	2 3/8	1/2	2 1/2
WC-2926-140	5.64	WC-2926-110	4.88	TPR Rubber	3 x 1 1/4	210	Delrin	3 3/8	3/8	1
WC-2926-150	5.74	WC-2926-120	4.98	TPR Rubber	3 x 1 1/4	210	Delrin	3 3/8	1/2	1
WC-2927-150	4.27	WC-2927-140	3.98	Polyolefin	3 x 1 1/4	210	Plain	3 3/8	3/8	1
WC-2927-160	4.47	—	—	Polyolefin	3 x 1 1/4	210	Plain	3 3/8	1/2	3/4
—	—	WC-2927-170	3.54	Polyolefin	3 x 1 1/4	210	Plain	3 3/8	1/2	1 1/2
—	—	WC-2909-240	4.54	Hard Rubber	3 x 1 1/4	210	Delrin	3 3/8	3/8	1
—	—	WC-2909-280	4.56	Hard Rubber	3 x 1 1/4	210	Delrin	3 3/8	1/2	1 1/2
—	—	WC-2927-180	22.51	Polyolefin	3 x 1 1/4	210	Plain	3 3/8	1/2	1 1/2
—	—	WC-2927-190	4.31	Polyolefin	3 x 1 1/4	210	Plain	3 3/8	3/8	1 1/2
WC-2904-180	6.30	—	—	Soft Rubber	4 x 1 1/4	165	Delrin	4 1/2	3/8	1
—	—	WC-2904-160	5.73	Soft Rubber	4 x 1 1/4	165	Delrin	4 1/2	1/2	3/4
WC-2909-320	6.56	—	—	Hard Rubber	4 x 1 1/4	255	Delrin	4 1/2	1/2	1
—	—	WC-2909-300	28.22	Hard Rubber	4 x 1 1/4	255	Delrin	4 1/2	1/2	3/4
WC-2909-340	6.56	—	—	Hard Rubber	4 x 1 1/4	255	Delrin	4 1/2	1/2	1 1/2
—	—	WC-2909-360	5.70	Hard Rubber	4 x 1 1/4	255	Delrin	4 1/2	3/8	1
WC-2925-110	6.82	—	—	TPR Rubber	4 x 1 1/4	275	Delrin	4 1/2	1/2	1
WC-2926-170	6.26	WC-2926-160	5.74	TPR Rubber	4 x 1 1/4	275	Delrin	4 1/2	3/8	1
—	—	WC-2927-240	5.74	Polyolefin	5 x 1 1/4	280	Plain	5 1/2	7/16	3/8

200+ BRANDS  
**ONE SOURCE**

We Have The Leading Products And Brands You Trust In.

Knobs, Handles & Grips



Clamps & Workholding



Tooling & Positioning Components



Feet, Casters & Glides




Cutting & Machining



STEM CASTERS


Wheel Type Description					
Phenolic	—	Black phenolic resin reinforced with macerated fabric for high capacity.	Nylon	—	Solid nylon wheel.
Soft Rubber	—	Black soft rubber tread molded to black hard rubber core.	Hard Rubber	—	Black hard rubber tread molded to black hard rubber core.
TPR Rubber	—	Thermoplastic non-marking rubber tread on a polyolefin core.	Polyolefin	—	Black molded polyolefin.

**Low Profile  
Medium Duty  
Applications: 150-500 Lbs.**

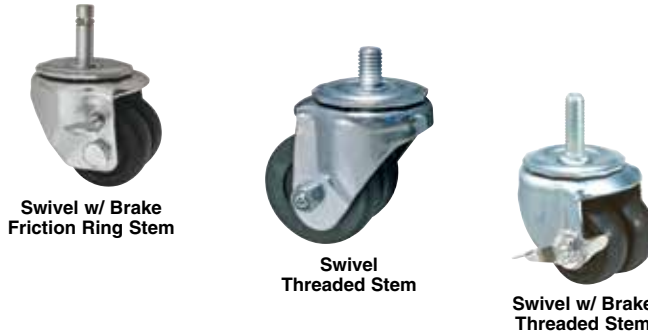

Double row swivel construction. 3/8" diameter nut and bolt axle. Zinc plated finish. 1 3/16" dual to 1 13/16" wheel tread width.

Swivel w/ Brake		Swivel		Wheel Type	Wheel Dia. x Width	Capacity (Lbs.)	Bearing	OAH	D	L
Item No.	Price Each	Item No.	Price Each							
<b>Friction Ring Stem</b>										
WC-1509-100	12.43	—	—	Hard Rubber	2 x 1 3/16	150	Delrin	2 3/4	7/16	1 3/8
—	—	WC-1509-120	8.10	Hard Rubber	2 x 1 3/16	200	Delrin	2 3/4	7/16	1 3/8
<b>Threaded Stem</b>										
—	—	WC-1509-160	8.59	Hard Rubber	2 1/2 x 1 3/16	300	Delrin	3 3/8	1/2	3/4
WC-1509-110	11.84	—	—	Hard Rubber	2 x 1 3/16	150	Delrin	2 3/4	1/2	1 1/2
WC-1509-190	10.52	WC-1509-200	8.85	Hard Rubber	3 x 1 3/16	350	Delrin	3 3/4	1/2	1 1/2
WC-1504-110	10.43	WC-1504-100	8.64	Soft Rubber	3 x 1 3/16	250	Delrin	3 3/4	9/8	1 1/2
WC-1527-140	8.35	—	—	Polyolefin	3 x 1 3/4	350	Sintered	3 3/4	1/2	3/4
WC-1527-150	12.96	—	—	Polyolefin	3 x 1 3/4	350	Sintered	3 3/4	1/2	3/4
—	—	WC-1538-130	11.98	Phenolic Resin	3 x 1 13/16	500	Roller	3 3/4	1/2	1 1/2

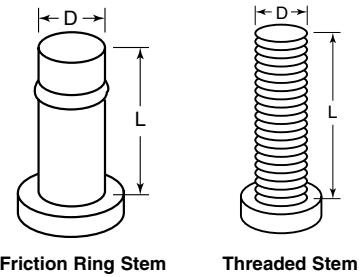

**Dual Wheel Swivel Caster  
Medium Duty  
Applications: 220 Lbs.**



Hollow kingpin 12mm.

Item No.	Wheel Type	Wheel Dia. x Width	Capacity (Lbs.)	Bearing	OAH	Price Each
WC-D586-10	TPR Rubber	3 x 1	220	Plain	4	17.05

**Low Profile Casters  
Medium Duty  
Applications: 200-350 Lbs.**




Available in swivel casters with hard rubber and phenolic treads and threaded stems. Selected casters have a thumb-screw brake.

Stem Specifications		
Stem Type	10	18
Stem Size x Lgth.	1/2-13 x 1 1/2	Leveling Stem 1/2-13 x 2 1/2

Item No.	Wheel Dia. x Width	Wheel Type	Stem Type	Capacity (Lbs.)	OAH	Price Each
WC-299*	2 x 1 3/16	Hard Rubber	18	200	2 3/4	14.98
WC-301*	2 x 1 3/16	Hard Rubber	10	200	2 3/4	14.17
WC-300*	3 x 1 3/4	Phenolic	18	350	3 3/4	19.26
WC-302	3 x 1 3/16	Hard Rubber	10	350	3 3/4	14.55

\* Thumb-screw brake

**Tandem Appliance Caster  
Medium Duty  
Application: 250 Lbs.**



Tandem wheels provide support for heavy appliances or furniture. Zinc plated finish. Wheels are white nylon.

Item No.	Wheel Dia.	Wheel Type	Capacity (Lbs.)	OAH	D	L	Price Each
WC-8055-10	.835	Nylon	250	2.15	3/16	7/8	9.94

**Scaffolding Casters  
Applications: 240 Lbs.**




Double row swivel construction. Zinc plated finish. Caster has total-lock brake. The stem is 1 1/4" x 4" square with a 7/16" hole located 2 1/2" up. Fits standard scaffolding structures.

Item No.	Wheel Type	Wheel Dia. x Width	Capacity (Lbs.)	Bearing	OAH	Stem Diameter (Squared)	Stem Length	Price Each
WC-1904-120	Soft Rubber	5 x 1 1/4	240	Plain	6 3/8	1 1/4	4	25.47

**STEM CASTERS**


Wheel Type Description			
Soft Rubber	—	Black soft rubber tread molded to black hard rubber core.	TPR Rubber — Thermoplastic non-marking rubber tread on a polyolefin core.
Polyolefin	—	Black molded polyolefin.	

**Industrial Casters**  
**Light Duty**  
**Applications: 100-145 Lbs.**




Double row swivel construction. 5/16" diameter nut and bolt axle. Zinc plated finish. 1" wheel tread width.

Swivel w/ Brake		Swivel		Rigid		Wheel Type	Wheel Dia. x Width	Capacity (Lbs.)	Bearing	OAH	D	L
Item No.	Price Each	Item No.	Price Each	Item No.	Price Each							
<b>Friction Ring Stem</b>												
WC-2604-150	6.97	WC-2604-120	6.09	—	—	Soft Rubber	3 x 1	100	Delrin	3 3/4	7/16	1 3/8
WC-2604-160	6.95	—	—	—	—	Soft Rubber	3 x 1	100	Delrin	3 3/4	7/16	1 3/8
—	—	WC-2604-170	7.79	—	—	Soft Rubber	4 x 1	115	Delrin	4 1 1/16	7/16	1 29/32
—	—	WC-2609-120	8.96	—	—	Soft Rubber	5 x 1	145	Delrin	5 1 1/16	19/16	1 3/4
<b>Threaded Stem</b>												
—	—	WC-2604-130	5.36	—	—	Soft Rubber	3 x 1	100	Delrin	3 3/4	3/8	1
—	—	WC-2604-110	5.52	—	—	Soft Rubber	3 x 1	100	Delrin	3 3/4	7/16	1 1/2
—	—	—	—	WC-1604-110	6.18	Soft Rubber	3 x 1	100	Delrin	3 1 3/4	7/16	1 1/2
—	—	WC-2627-100	4.63	—	—	Polyolefin	3 x 1	125	Plain	3 3/4	7/16	1 1/2
WC-2604-200	9.11	WC-2604-190	7.78	—	—	Soft Rubber	5 x 1	125	Delrin	5 1 1/16	1/2	1 1/2
<b>Octagon Stem</b>												
—	—	WC-2686-100	14.76	—	—	Soft Rubber	4 x 1	115	Delrin	4 1 1/16	3/4	2





**Furniture Casters**  
**Light Duty**  
**Applications: 75-100 Lbs.**




Double row swivel construction. 1/4" diameter rivet axle. Zinc plated finish.

Swivel		Swivel w/ Brake		Wheel Type	Wheel Dia. x Width	Capacity (Lbs.)	Bearing	OAH	D	L
Item No.	Price Each	Item No.	Price Each							
<b>Friction Ring Stem</b>										
WC-9404-20	6.39	—	—	Soft Rubber	2 x 1 3/16	75	Delrin	2 1/2	7/16	1 3/8
WC-9404-35	6.68	—	—	Soft Rubber	2 1/2 x 1 3/16	90	Delrin	2 1/2	7/16	1 3/8
WC-9404-65	6.82	WC-9404-75	8.21	Soft Rubber	3 x 1 3/16	100	Delrin	3 3/16	7/16	1 3/8
—	—	WC-9404-80	9.10	Soft Rubber	3 x 1 3/16	100	Delrin	3 3/16	7/16	1 29/32
<b>Grip Neck Stem</b>										
WC-9427-40	5.93	—	—	Polyolefin	2 x 3/4	100	Plain	2 1/2	5/16	1 9/16
WC-9404-70	6.90	—	—	Soft Rubber	3 x 1 3/16	100	Delrin	3 9/16	5/16	1 9/16
—	—	WC-9404-50	8.04	Soft Rubber	2 x 1 3/16	75	Delrin	2 3/8	—	—
—	—	WC-9404-90	8.26	Soft Rubber	3 x 1 3/16	100	Delrin	3 3/16	5/16	1 9/16
<b>Threaded Stem</b>										
—	—	WC-9427-20	6.99	Polyolefin	2 x 3/4	100	Plain	2 1/2	5/16	1
WC-9404-30	8.02	—	—	Soft Rubber	2 x 1 3/16	75	Delrin	2 1/2	3/8	1 1/2
WC-9404-25	6.80	—	—	Soft Rubber	2 x 1 3/16	75	Delrin	2 1/2	5/16	1
WC-9426-30	6.51	—	—	TPR Rubber	2 x 1 3/16	75	Plain	2 1/2	5/16	3/4
WC-9409-20	6.82	—	—	Soft Rubber	2 x 1 3/16	100	Delrin	2 1/2	3/8	1 1/2
WC-9404-40	6.95	—	—	Soft Rubber	2 1/2 x 1 3/16	90	Delrin	2 1/2	3/8	3/4
—	—	WC-9404-45	7.09	Soft Rubber	2 1/2 x 1 3/16	90	Delrin	2 1/2	3/16	1
—	—	WC-9404-85	7.32	Soft Rubber	3 x 1 3/16	100	Delrin	3 3/16	3/8	1



Wheel Type Description					
Soft Rubber	—	Black soft rubber tread molded to black hard rubber core.	Hard Rubber	—	Black hard rubber tread molded to black hard rubber core.
Polyolefin	—	Black molded polyolefin.			

**Light Duty**  
Applications: 100-145 Lbs.




Double row swivel construction. 5/16" diameter nut and bolt axle. Zinc plated finish. Heat treated and factory lubricated swivel raceways. Brake kit WC-140 sold separately.

**Threaded Stem**

Item No.	D	L	Wheel Dia. x Width	Wheel Type	Capacity (Lbs.)	OAH	Price Each
WC-109	3/8-16	1 1/2	3 x 1	Soft	100	3 3/8	7.91
WC-110	3/8-16	1 1/2	4 x 1	Soft	115	4 1/16	9.86
WC-113	1/2-13	1 1/2	4 x 1	Soft	115	4 1/16	8.69
WC-114	1/2-13	1 1/2	5 x 1	Soft	125	5 1/16	10.83
WC-115	3/8-16	1 1/2	3 x 1	Polyolefin	125	3 3/8	7.12
WC-116	3/8-16	1 1/2	4 x 1	Polyolefin	140	4 1/16	8.06
WC-117	3/8-16	1 1/2	5 x 1	Polyolefin	145	5 1/16	9.17
WC-118	1/2-13	1 1/2	3 x 1	Polyolefin	125	3 3/8	6.26
WC-119	1/2-13	1 1/2	4 x 1	Polyolefin	140	4 1/16	7.77
WC-120	1/2-13	1 1/2	5 x 1	Polyolefin	145	5 1/16	8.90
WC-140	Brake Kit						

**Roller Caster**  
Light Duty  
Applications: 90 Lbs.



**Friction Ring Stem**

Furniture, cabinets and small appliances caster.

Item No.	Wheel Type	Wheel Dia. x Width	Capacity (Lbs.)	Bearing	OAH	D	L	Price Each
WC-H086-10	Polyolefin	2 1/2 x 1 3/16	90	Plain	2 13/16	7/16	1 3/4	2.24

**RSOC Series**  
Round Plastic Caster Sockets




- Specifications:
- Material: Polyethylene
  - Color: Gray

- Features:
- Heavy-duty open top
  - Round with flutes
  - Can be used with any stem length


Item No.	Stem Size In	To Fit Tube Size In	Tube Gauge	Pack Qty.	Price Each
RSOC1000A	7/16 x 7/8 FRS	1.000	16	1000	3.01
RSOC1100A	7/16 x 7/8 FRS	1.000	18	1000	3.01

**Threaded Stems**  
Light Duty  
Applications: 75-125 Lbs.



Item No.	D	L	Wheel Dia. x Width	Wheel Type	Finish	Capacity (Lbs.)	OAH	Price Each
WC-382	5/16-18	1	2 x 1 3/16	Hard Rubber	Chrome	100	2 1/2	7.92
WC-415	5/16-18	1	2 x 1 3/16	Soft Rubber	Chrome	75	2 1/2	7.94
WC-372	3/8-16	1	2 x 1 3/16	Soft Rubber	Chrome	75	2 1/2	7.90
WC-373	3/8-16	1	2 x 1 3/16	Hard Rubber	Chrome	100	2 1/2	7.90
WC-374	3/8-16	1 1/2	2 x 1 3/16	Hard Rubber	Chrome	100	2 1/2	7.46
WC-384	3/8-16	1 1/2	2 1/2 x 1 3/16	Soft Rubber	Chrome	90	3 1/16	8.07
WC-386	3/8-16	1 1/2	2 1/2 x 1 3/16	Hard Rubber	Chrome	115	3 1/16	8.11
WC-376	3/8-16	1	3 x 1 3/16	Soft Rubber	Chrome	100	3 3/16	7.84
WC-379	3/8-16	1	3 x 1 3/16	Hard Rubber	Chrome	125	3 3/16	7.82
WC-385	3/8-16	1 1/2	3 x 1 3/16	Soft Rubber	Chrome	100	3 3/16	7.88
WC-387	3/8-16	1 1/2	3 x 1 3/16	Hard Rubber	Chrome	125	3 3/16	7.84
WC-368	1/2-13	1 1/2	2 x 1 3/16	Polyolefin	Zinc	100	2 1/2	6.27
WC-369	1/2-13	1 1/2	2 x 1 3/16	Soft Rubber	Zinc	75	2 1/2	6.90

**Friction Ring**  
Light Duty  
Applications: 75-125 Lbs.



Item No.	D	L	Wheel Dia. x Width	Wheel Type	Finish	Capacity (Lbs.)	OAH	Price Each
WC-388	7/16	1	2 x 1 3/16	Soft Rubber	Chrome	75	2 1/2	7.75
WC-402	7/16	1 3/8	2 x 1 3/16	Soft Rubber	Nickel	75	2 1/2	5.13
WC-370	7/16	1 3/8	2 x 1 3/16	Soft Rubber	Zinc	75	2 1/2	6.65
WC-371	7/16	1 3/8	2 x 1 3/16	Polyolefin	Zinc	100	2 1/2	6.32
WC-380	7/16	1 3/8	2 x 1 3/16	Hard Rubber	Chrome	100	2 1/2	7.94
WC-393	7/16	7/8	2 1/2 x 1 3/16	Soft Rubber	Nickel	90	3 1/16	6.15
WC-391	7/16	1 3/8	2 1/2 x 1 3/16	Soft Rubber	Nickel	90	3 1/16	5.86
WC-375	7/16	1 3/8	3 x 1 3/16	Soft Rubber	Chrome	100	3 3/16	7.84
WC-377	7/16	1 3/8	3 x 1 3/16	Hard Rubber	Chrome	125	3 3/16	7.88

**SSOC Series**  
Square Plastic Caster Sockets

- Specifications:
- Material: Linear Polyethylene
  - Color: Natural

- Features:
- Top bearing



Item No.	Stem Size In	To Fit Tube Size In	Tube Gauge	Pack Qty.	Price Each
SSOC1000A	#2 Gripneck Stem	1.000	18	1600	2.22
SSOC1100A	7/16 x 7/8 FRS	1.000	18	1600	2.37

CASTERS SETS & ACCESSORIES

Buy One or Buy Bulk & **SAVE!**

Wheel Type Description

Hard Rubber — Black hard rubber tread molded to black hard rubber core. Polypropylene — Black molded Polypropylene.

Caster Sets

Medium Duty


Applications: 300-400 Lbs.



Swivel Threaded Stem



Rigid Plate



Threaded Stem

Double row swivel construction. 3/8" diameter nut and bolt axle. Zinc plated finish. Available in threaded stem and plate. 1 3/8" to 1 3/4" wheel tread width.






Plate Specifications	
Plate Type 00	
Overall Size	2 3/4 x 3 3/4
Hole Spacing	1 1/4 x 3
Hole Dia.	1 1/32
Bolt Dia.	5/16

Swivel		Rigid		Wheel Type	Wheel Dia. x Width	Capacity (Lbs.)	Bearing	OAH	D	L	Plate Type
Item No.	Price Each	Item No.	Price Each								
<b>Threaded Stem</b>											
WC-1227-170	39.47	—	—	Polypropylene	5 x 1 3/8	400	Delrin	5 7/8	1/2	3/4	—
<b>Plate</b>											
—	—	WC-1509-170	49.65	Hard Rubber	2 1/2 x 1 3/4	300	Delrin	3 1/2	—	—	00



Winged Brackets



Type 1



Type 2



ERWagner  
CASTERS & WHEELS Manufacturing Co.

Weldable metal socket for 90 degree corner. Used with 7/16" friction ring stems.

Item No.	1	A	B	C	Angle	Price Each
WC-WP77-10	1	1.562	1.500	.440 - .455	90	0.91
WC-W386-10	2	1.607	1.250	.440 - .455	90	0.89
WC-HP77-20	3	—	—	—	180	0.91

Round and Square Caster Sockets

ERWagner  
CASTERS & WHEELS Manufacturing Co.



Type 1



Type 5



Type 2



Type 6



Type 3



Type 7



Type 4



Type 8

Item No.	Type	Color	Tube OD	Tube Gauge	Hole Diameter	For Stem	Stem Diameter	Style	Socket Material	Price Each
<b>For Round Tubes</b>										
WC-SP77-240	7	Natural	1	16	—	Round	7/16	Top	Steel	0.54
WC-SP77-170	4	Black	1 1/4	18	—	Grip	5/16	Top	Polyolefin	0.14
<b>For Square Tubes</b>										
WC-SP77-160	3	Black	3/4	18	—	Grip	5/16	Top	Polyolefin	0.15
WC-SP77-180	3	Natural	3/4	20	—	Grip	5/16	Top	Polyolefin	0.16
WC-SP77-210	3	Natural	1	16	—	Grip	5/16	Top	Polyolefin	0.13
WC-SP77-140	3	Natural	1	18	—	Friction	3/8	Top	Polyolefin	0.32
WC-SP77-200	3	Black	1	18	—	Grip	5/16	Top	Polyolefin	0.16
WC-SP77-220	3	Black	1	18	—	Grip	5/16	Top	Polyolefin	0.14
WC-SP77-280	4	Natural	1	18	—	Friction	7/16	Top	Polyolefin	0.72
<b>For Straight Holes</b>										
WC-SP77-230	1	Natural	—	—	3/8	Grip	5/16	Open	Steel	0.17
WC-SP77-310	5	Natural	—	—	3/8	Grip	5/16	Top	Steel	0.40
WC-SP77-100	2	Brown	—	—	1/2	Grip	3/8	Top	Polyolefin	0.07
WC-SP77-110	2	Natural	—	—	1/2	Grip	3/8	Top	Polyolefin	0.16
WC-SP77-250	7	Natural	—	—	9/16	Friction	7/16	Top	Steel	0.69
WC-SP77-270	2	Natural	—	—	9/16	Friction	7/16	Top	Polyolefin	0.16
WC-SP77-290	8	Natural	—	—	9/16	Friction	7/16	Top	Steel	0.73
WC-SP77-260	2	Natural	—	—	5/8	Friction	7/16	Top	Polyolefin	0.12
<b>Socket</b>										
WC-SP77-150	6	Black	1 1/8	—	1 1/2	—	—	Top	Polyolefin	0.48

HEAVY DUTY PLATE CASTERS

Wheel Type Description			
Cast Iron	— Toughened with steel, high load rating and long wear life.	Urethane on Aluminum	— Molded and mechanically locked to aluminum core.
Rubber on Aluminum	— Rubber tread permanently bonded to aluminum core.	Phenolic	— Phenolic resin reinforced with macerated fabric for high capacity.

**Truck Casters**  
**Heavy Duty**  
**Applications: 350-1200 Lbs.**



Swivel



Swivel with Total-Lock



Rigid




Plate Specifications	
Plate Type 90	
Overall Size	4 x 4 <sup>5/8</sup>
Hole Spacing	2 <sup>5/8</sup> x 3 <sup>3/8</sup> to 3 x 3
Hole Dia.	5/8 x 3/4 Slots
Bolt Dia.	3/8

Swivel casters have top raceway grease seal and yellow zinc chromate finish for better corrosion resistance. Total-lock locks both wheel and swivel simultaneously.

Swivel w/ Total-Lock		Swivel		Rigid		Wheel Dia. x Width	Wheel Type	Capacity (Lbs.)	OAH
Item No.	Price Each	Item No.	Price Each	Item No.	Price Each				
WC-305	58.28	WC-303	54.13	WC-304	33.84	5 x 2	Rubber on Aluminum	350	6 <sup>1/2</sup>
WC-314	66.54	WC-312	57.51	WC-313	34.26	5 x 2	Urethane on Aluminum	1,050	6 <sup>1/2</sup>
WC-323	53.01	WC-321	40.15	WC-322	21.42	5 x 2	Phenolic	1,000	6 <sup>1/2</sup>
WC-308	57.99	WC-306	46.83	WC-307	35.12	6 x 2	Rubber on Aluminum	410	7 <sup>1/2</sup>
WC-317	72.17	—	—	WC-316	40.37	6 x 2	Urethane on Aluminum	1,200	7 <sup>1/2</sup>
WC-326	49.42	WC-324	34.94	WC-325	21.32	6 x 2	Phenolic	1,200	7 <sup>1/2</sup>
WC-311	70.13	WC-309	58.27	WC-310	46.64	8 x 2	Rubber on Aluminum	500	9 <sup>1/2</sup>
WC-320	78.03	WC-318	64.53	WC-319	50.46	8 x 2	Urethane on Aluminum	1,200	9 <sup>1/2</sup>
WC-329	60.89	WC-327	39.03	WC-328	25.15	8 x 2	Phenolic	1,200	9 <sup>1/2</sup>

**Kingpinless Casters**  
**Heavy Duty**  
**Applications: 1,600-2,000 Lbs.**



Rigid with Phenolic Wheel



Swivel with Phenolic Wheel




Plate Specifications	
Plate Type AY	
Overall Size	4 <sup>1/2</sup> x 6 <sup>5/16</sup>
Hole Spacing	2 <sup>1/16</sup> x 4 <sup>15/16</sup> Slotted to 3 <sup>3/8</sup> x 5 <sup>1/4</sup>
Bolt Dia.	1/2

Used when superior swivel action is needed.

Rigid		Swivel		Wheel Dia. x Width	Wheel Type	Capacity (Lbs.)	OAH
Item No.	Price Each	Item No.	Price Each				
WC-337	49.16	—	—	6 x 2 <sup>1/2</sup>	Phenolic	1,600	7 <sup>1/2</sup>
WC-349	60.70	WC-348	128.70	6 x 2 <sup>1/2</sup>	Cast Iron	2,000	7 <sup>1/2</sup>
WC-339	58.60	WC-338	83.70	8 x 2 <sup>1/2</sup>	Phenolic	2,000	10 <sup>1/8</sup>
WC-351	70.10	WC-350	95.20	8 x 2 <sup>1/2</sup>	Cast Iron	2,000	10 <sup>1/8</sup>
WC-347	102.50	WC-346	125.96	10 x 2 <sup>1/2</sup>	Urethane on Cast Iron	2,000	11 <sup>1/2</sup>
WC-353	97.30	WC-352	121.30	10 x 2 <sup>1/2</sup>	Cast Iron	2,000	11 <sup>1/2</sup>

**HEAVY DUTY PLATE CASTERS & WHEELS**

Wheel Type Description			
Pneumatic	— Air filled tube tire.	Phenolic	— Phenolic resin reinforced with macerated fabric for high capacity.
Soft Rubber	— Black soft rubber tread molded to a black hard rubber core.	Hard Rubber	— Black hard rubber tread molded to a black hard rubber core.
TPR Rubber	— Thermoplastic non-marking rubber tread on a polyolefin core.		

**Pneumatic Medium-Heavy Duty Applications: 200-350 Lbs.**



Available in swivel, swivel with total-lock, and rigid in the 6" size. Swivel, swivel with strap brake and rigid in 8" size. Swivel and rigid in 10" size. Gray tread color for non-marking feature. Ball wheel bearings.




Swivel with Brake



Swivel




Rigid



Swivel w/Brake		Swivel		Rigid		Wheel Dia. x Width	Plate Type	Capacity (Lbs.)	OAH
Item No.	Price Each	Item No.	Price Each	Item No.	Price Each				
WC-356*	52.30	WC-354	43.58	WC-355	35.39	6 x 2	AR	200	7 1/2
WC-359*	53.13	WC-357	44.41	WC-358	36.28	6 x 2	90	200	7 1/2
WC-362**	68.40	WC-360	50.00	WC-361	48.12	8 x 2.80/2.50-4	90	300	9 1/16
—	—	WC-363	59.14	WC-364	56.71	10 x 4.10/3.10-4	90	350	11 1/16

Plate Specifications		
Plate Type	AR	90
Overall Size	2 3/4 x 3 3/4	4 x 4 5/8
Hole Spacing	1 1/4 x 2 1/8 to 3	2 5/8 x 3 3/8 to 3 x 3
Hole Dia.	1 1/32 x 1 1/32 Slots	3/8 x 3/4 Slots
Bolt Dia.	5/16	3/8



\*Total-lock brake  
\*\*Strap brake

**Duratex Wheels Medium-Heavy Duty Applications: 500 Lbs.**



Duratex wheels are made from a black phenolic resin. They are recommended for medium to heavy loads on carpeted and hard surfaced floors. They provide good protection to floors and are quieter than steel wheels. Recommended operating temperature range is -45° F to 300° F. Tread hardness is 102 Shore E.

Item No.	Wheel Dia. x Width	Wheel Type	Capacity (Lbs.)	Hub Width	Axle Size	Bearing	Price Each
WC-1338-02	3 x 1 1/2	Phenolic Resin	500	1 5/8	3/8	Roller	9.08
WC-1338-04	3 x 1 3/4	Phenolic Resin	500	1 7/8	3/8	Roller	6.06

**All-Hard Rubber Wheels Light-Heavy Duty Applications: 100-400 Lbs.**



All-hard rubber tread material consists of a black hard rubber molded to a black hard rubber core. Used for light to heavy loads on carpeted or hard surfaced floors. These wheels roll with ease, are non-sparking and resistant to water, oil and most acids. Recommended operating temperature range is -20° F to 125° F. Tread hardness is 70-85 Shore D.

Item No.	Wheel Dia. x Width	Wheel Type	Capacity (Lbs.)	Hub Width	Axle Size	Bearing	Price Each
WC-1309-05	2 x 1 3/16	Hard Rubber	100	1 5/16	3/8	Delrin	0.63
WC-1309-10	2 1/2 x 1 1/8	Hard Rubber	175	1 1/4	3/8	Sintered	1.49
WC-1309-15	2 1/2 x 1 3/16	Hard Rubber	115	1 5/16	1/4	Delrin	1.08
WC-1309-20	3 x 1	Hard Rubber	125	1 1/8	3/8	Delrin	1.20
WC-1309-25	3 x 1 3/16	Hard Rubber	125	1 5/16	1/4	Delrin	1.27
WC-1309-30	3 1/2 x 1 1/4	Hard Rubber	250	1 1/2	3/8	Delrin	2.81
WC-1309-40	6 x 1 1/8	Hard Rubber	400	1 1/2	3/8	Delrin	8.19
WC-1304-55	6 x 1 3/8	Hard Rubber	400	1 1/2	3/8	Delrin	9.44

**All-Rubber Wheels Light-Medium Duty Applications: 75-200 Lbs.**



All-rubber wheels are made of a black soft rubber molded to a black hard rubber core. They are recommended for light to medium loads on hard surfaced floors. Along with a quiet operation it also provides a cushioned ride absorbing shock and vibration. Recommended operating temperature range is -20° F to 125° F. Tread hardness is 70-85 Shore A.

Item No.	Wheel Dia. x Width	Wheel Type	Capacity (Lbs.)	Hub Width	Axle Size	Bearing	Price Each
WC-1304-20	2 1/2 x 1 3/16	Soft Rubber	90	1 5/16	1/4	Delrin	1.09
WC-1304-10	2 1/2 x 1 1/8	Soft Rubber	120	1 27/64	5/16	Delrin	1.54
WC-1304-25	3 x 1	Soft Rubber	100	1 1/8	5/16	Delrin	2.18
WC-1304-35	3 x 1 1/4	Soft Rubber	125	1 27/64	5/16	Delrin	1.49
WC-1304-40	3 x 1 1/4	Soft Rubber	125	1 27/64	5/16	Sintered	2.70
WC-1304-45	4 x 1	Soft Rubber	75	1 1/8	5/16	Delrin	2.49
WC-1386-30	4 x 1	Soft Rubber	115	1 1/8	3/8	Delrin	2.81
WC-1304-50	4 x 1 3/8	Soft Rubber	200	1 1/2	3/8	Delrin	3.31
WC-1386-40	5 x 1	Soft Rubber	125	1 1/8	5/16	Sintered	5.37

**TPR Rubber Wheels Light-Medium Duty Applications: 275-300 Lbs.**



TPR rubber wheels consist of a dark gray thermoplastic rubber molded to a gray polyolefin core. They roll easily, quietly and provide excellent floor protection. They are recommended for light to medium loads on carpeted and hard surfaced floors. Recommended temperature range is -40° F to 180° F. Tread hardness 65-75 Shore A.

Item No.	Wheel Dia. x Width	Wheel Type	Capacity (Lbs.)	Hub Width	Axle Size	Bearing	Price Each
WC-1326-10	4 x 1 1/4	TPR Rubber	275	1 1/2	3/8	Delrin	3.11
WC-1326-20	5 x 1 1/2	TPR Rubber	300	1 1/2	3/8	Delrin	3.91
WC-1326-30	5 x 1 3/4	TPR Rubber	300	1 1/2	3/8	Delrin	3.73

Wheel Type Description			
Cast Iron	— Toughened with steel, high load rating and long wear life.	Rubber on Aluminum	— Molded and Mechanically locked to aluminum core.
Polyolefin	— Black molded polyolefin.		

**Durafoam Wheels**  
**Light-Medium Duty**  
**Applications: 50-350 Lbs.**



Dished



Solid

Durafoam wheels have a dished or solid profile. Wheel material is black polyolefin. Requires no bearing which makes them ideal for corrosive applications. They have good floor protection and offer easy rolling. They are recommended for light to heavy loads on carpeted and hard surfaced floors. They are non-marking, resistant to water, oil and most acids and chemicals. Recommended operating temperature range is -20° F to 180° F. Tread hardness is 60-75 Shore D.

Item No.	Wheel Dia. x Width	Wheel Type	Capacity (Lbs.)	Hub Width	Axle Size	Bearing	Price Each
WC-1386-10	1½ x ¼	Polyolefin	50	¾	¼	Plain	0.24
WC-1327-100	2½ x ¼	Polyolefin	115	1½	¼	Plain	0.43
WC-1327-110	3 x ¼	Polyolefin	350	1½	5/8	Roller	1.22
WC-1327-120	3 x ¾	Polyolefin	125	1½	¼	Plain	0.55
WC-1327-130*	4 x 1½	Polyolefin	300	1½	5/8	Plain	1.44
WC-H586-20	4 x 1¼	Polyolefin	255	1½	¾	Plain	0.99

\* Solid Profile

**Mold-On Rubber Wheels**  
**Light-Medium Duty**  
**Application: 500 Lbs.**



Mold-on rubber wheels consist of a soft black rubber tread permanently bonded to an aluminum core. Excellent floor and load protection, quiet operation and absorbs shock and vibration. Recommended for light to medium loads on hard surfaced floors. Recommended operating temperature range is -20° F to 160° F. Tread hardness 70-85 Shore A.

Item No.	Wheel Dia. x Width	Wheel Type	Capacity (Lbs.)	Hub Width	Axle Size	Bearing	Price Each
WC-8386-10	8 x 2	Soft Rubber	500	2¾	½	Roller	30.17

**Semi-Steel Wheels**  
**Heavy Duty**  
**Applications: 1,000-1,200 Lbs.**



Semi-steel wheels are made of cast iron and enriched with steel. Roll easily under heavier loads. Recommended for use on floors that are littered with metal debris and where floor protection and noise are not concerns. Impact resistant and performs well in extreme temperatures. Recommended operating temperature range is -50° F to 500° F.

Item No.	Wheel Dia. x Width	Wheel Type	Capacity (Lbs.)	Hub Width	Axle Size	Bearing	Price Each
WC-8311-10	5 x 2	Cast Iron	1,000	2¾	½	Roller	9.67
WC-8311-20	6 x 2	Cast Iron	1,200	2¾	½	Roller	9.67

# TUBE INSERTS

Pages 347 - 357

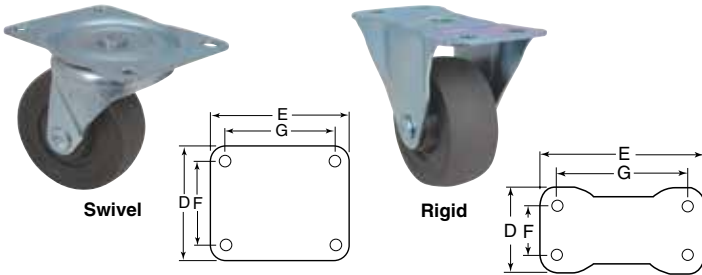


PLATE CASTERS

Wheel Type Description		
Duro-Tred	— Polyurethane tread permanently vulcanized to a semi-steel or aluminum core. Cushioned ride and long wear under heavy load. Excellent mobility.	Polyflex — Polyolefin wheel is light weight and impact resistant. Withstands water and chemicals. Non-marking, good mobility.
Dyna-Tred	— Santoprene thermoplastic rubber resists chemicals, high temperatures and wear. Polypropylene hub won't dent, mar or stain.	Rockite — Hard rubber composition throughout - impervious to oil and greases.
Dyna-Tred Poly	— Polyurethane allows high load capacity and extended wear. Resists chemicals. Polypropylene hub won't dent, mar or stain.	Ruberex — Composition rubber wheel combines a soft rubber tread with a hard rubber core. Quiet movement and cushioned ride.
K-Wheel	— High strength solid urethane withstands temperatures from -50° to 180° F. Load characteristics of steel. Steam clean-able.	Semi-Steel — Cast iron toughened with steel. High load rating and long wear life.
Plaskite	— Phenolic compound reinforced with macerated fabric makes a high impact wheel resistant to oil, gas, etc.	Sintered Iron — Powdered iron, compacted and sintered to cast iron strength. Concentric and smooth tread.
		Vulcanized Rubber — Cushioned rubber tread permanently vulcanized to semi-steel core.

Bearing Type Description		
Plain	— Wheel bore rides on the spanner bushing or axle. Used for light loads and low movement.	Self-Lubricating — Oil-impregnated bronze for use where there is moisture or low maintenance is needed.
Roller	— For heavier loads-anti-friction.	

General Duty Applications: 90-450 Lbs.




Wheel Size	Swivel		Wheel Size	Rigid	
	D x E	F x G		D x E	F x G
2	1 1/8 x 2 1/16	1 5/16 x 2 1/8	2	1 1/2 x 2 21/32	1 5/16 x 2 1/8
2 1/2	2 3/4 x 3 3/16	1 3/4 x 3	2 1/2	2 1/4 x 4 1/16	1 1/16 x 3 1/2
3	3 1/8 x 4 1/8	2 5/8 x 3 3/8 to 3 7/16	3	2 1/2 x 4 15/16	1 3/16 x 4
4	4 x 5 1/8	3 x 4	4	3 3/8 x 6 1/4	1 3/4 x 5
5	5 1/16 x 5 15/16	3 3/4 x 4 1/2	5	3 1/2 x 7 1/4	1 1/8 x 6

Swivel		Rigid		Wheel Dia. x Width	Wheel Type	Capacity (Lbs.)	OAH
Item No.	Price Each	Item No.	Price Each				
NFC-25082	4.36	NFC-25748	3.98	2 x 1	Ruberex	90	2 1/2
NFC-25086	5.69	—	—	2 x 1	Ruberex	90	2 1/2
NFC-25124	4.40	NFC-25783	4.04	2 x 1	Rockite	150	2 1/2
NFC-25125*	5.25	—	—	2 x 1	Rockite	150	2 1/2
NFC-25083	9.34	NFC-25749	6.41	2 1/2 x 1 1/8	Ruberex	100	3 1/4
NFC-25128	10.05	NFC-25785	6.41	2 1/2 x 1 1/8	Rockite	200	3 1/4
NFC-25091	9.88	NFC-25752	8.85	3 x 1 1/4	Ruberex	175	3 3/16
NFC-25095*	12.84	—	—	3 x 1 1/4	Ruberex	175	3 3/16
NFC-25136	10.33	NFC-25787	9.29	3 x 1 1/4	Rockite	270	3 3/16
NFC-25179	38.98	NFC-25814	26.51	3 x 1 1/4	Plaskite	300	3 3/16
NFC-25049	15.10	—	—	3 x 1 3/16	Sintered-Iron	300	3 3/16
NFC-25149	22.71	NFC-25790	16.21	4 x 1 1/16	Rockite	350	5
NFC-25176*	22.99	—	—	4 x 1 1/16	Rockite	350	5
NFC-25057	27.65	—	—	4 x 1 1/8	Sintered-Iron	450	5

\*With brake

Light Medium Duty 5/16" Mounting Bolt Applications: 175 - 290 Lbs.

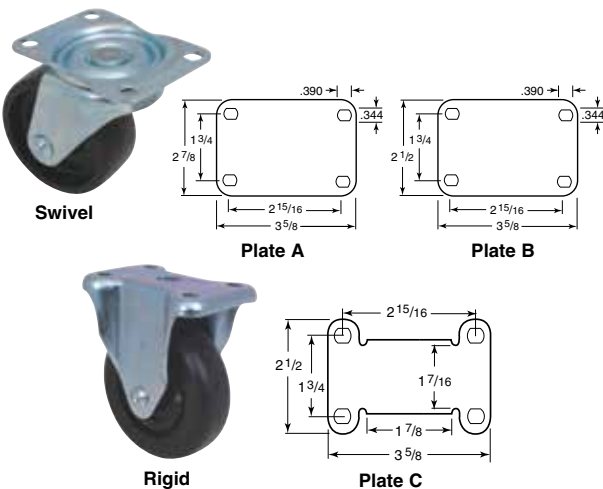

Item No.	Plate Style	Wheel Dia. x Width	Wheel Type	Bearing	Capacity (Lbs.)	OAH	Price Each
<b>Swivel</b>							
NFC-25447	A	2 1/2 x 1 1/8	Rockite	Self-Lube	200	3 3/16	12.69
NFC-24578	A	3 x 1 1/4	Ruberex	Self-Lube	175	3 3/16	13.77
NFC-25451	A	3 x 1 1/4	Rockite	Self-Lube	270	3 3/16	13.63
NFC-25518	A	3 x 1 1/4	Polyflex	Plain	270	3 3/16	10.88
NFC-25510	B	3 1/2 x 1 5/16	Rockite	Self-Lube	275	4 3/4	20.46
NFC-25413	B	4 x 1 1/4	Ruberex	Self-Lube	200	5	19.61
NFC-25460	B	4 x 1 1/4	Rockite	Self-Lube	275	5	19.64
NFC-25475	B	4 x 1 1/4	Polyflex	Plain	275	5	17.74
NFC-25533	B	5 x 1 1/4	Ruberex	Self-Lube	200	6 1/8	22.50
NFC-25467	B	5 x 1 1/4	Rockite	Self-Lube	290	6 1/8	23.50
<b>Rigid</b>							
NFC-25111	C	2 1/2 x 1 1/8	Rockite	Self-Lube	200	3 3/16	11.23
NFC-25113	C	3 x 1 1/4	Ruberex	Self-Lube	175	3 3/16	12.81
NFC-25114	C	3 x 1 1/4	Rockite	Self-Lube	270	3 3/16	10.83
NFC-27280	C	4 x 1 1/4	Ruberex	Self-Lube	200	5	16.21
NFC-25099	C	4 x 1 1/4	Rockite	Self-Lube	275	5	16.46
NFC-25105	C	4 x 1 1/4	Polyflex	Plain	275	5	12.69
NFC-27281	C	5 x 1 1/4	Ruberex	Self-Lube	200	6 1/8	20.46
NFC-25109	C	5 x 1 1/4	Rockite	Self-Lube	290	6 1/8	21.38
NFC-27293	C	5 x 1 1/4	Polyflex	Plain	290	6 1/8	13.31

Note: Roll lock brake kits available for 4" and 5" casters.

PLATE CASTERS & ACCESSORIES

**Caster Wheels**  
Applications: 150-900 Lbs.



Rockite



Plaskite



Item No.	Wheel Dia. x Width	Wheel Type	Capacity (Lbs.)	Hub Lgth.	Axle Size	Bearing	Price Each
NFC-42010	2 x 1	Rockite	150	1 1/4	1/4	Self-Lube	1.79
NFC-42011	2 1/2 x 1 1/2	Rockite	200	1 3/8	5/16	Self-Lube	2.47
NFC-42021	3 x 1 1/4	Rockite	270	1 7/8	3/8	Self-Lube	3.90
NFC-37636	4 x 2	Plaskite	700	2 3/8	3/4	Roller	13.20
NFC-37639	5 x 2	Plaskite	900	2 3/4	3/4	Roller	13.45
NFC-37637	6 x 2	Plaskite	900	2 3/8	3/4	Roller	18.84
NFC-37643	8 x 2	Plaskite	900	2 7/8	3/4	Roller	24.53


**Light Duty Self Lubricating Bearings**  
5/16" Mounting Bolt  
Applications: 90-115 Lbs.



Swivel




Rigid



Swivel		Rigid		Wheel Dia. x Width	Wheel Type	Capacity (Lbs.)	OAH
Item No.	Price Each	Item No.	Price Each				
NFC-29906	9.74	NFC-31232	9.22	3 x 1 3/16	Ruberex	90	3 3/4
NFC-29920*	19.74	NFC-31239	10.20	4 x 1 5/16	Ruberex	115	4 13/16

\*With brake

**Caster Rollock Brake Kit**

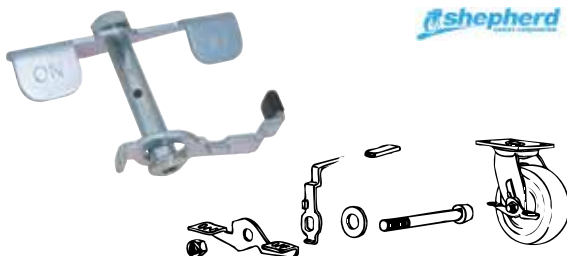

Tread-gripping action locks wheel and prevents rolling. Simple cam mechanism has no connecting linkage to wear or misalign. Installation is quick and easy. Instructions included. Available only for light medium duty and medium heavy duty Faultless swivel casters.

Item No.	Size	Price Each	Item No.	Size	Price Each
<b>Light Medium Duty Casters</b>			<b>Medium Heavy Duty Casters</b>		
NFC-32275	4	7.83	NFC-32280	4	11.26
NFC-32276	5	8.01	NFC-32277	5	9.45
			NFC-32278	6	9.98


**Medium Heavy Duty Roller Bearings**  
3/8" Mounting Bolt  
Applications: 350 - 1,000 Lbs.



Swivel



Rigid



Swivel		Rigid		Wheel Dia. x Width	Wheel Type	Capacity (Lbs.)	OAH
Item No.	Price Each	Item No.	Price Each				
NFC-26837	38.78	NFC-27127	31.48	4 x 2	Vulc. Rubber	350	5 1/2
NFC-26908	40.41	NFC-27079	38.49	4 x 2	Polyflex	450	5 1/2
NFC-26926	52.14	NFC-27160	42.16	4 x 2	Semi-Steel	700	5 1/2
NFC-26819	42.56	NFC-27115	33.00	4 x 2	Plaskite	700	5 1/2
NFC-26780	57.80	NFC-27045	66.66	4 x 2	K-Wheel	700	5 1/2
NFC-26840	45.59	NFC-27129	33.29	5 x 2	Vulc. Rubber	400	6 1/2
NFC-26985	49.74	NFC-27036	41.92	5 x 2	Dyna-Tred Poly	750	6 1/2
NFC-26814	56.83	NFC-27123	36.01	5 x 2	Semi-Steel	900	6 1/2
NFC-26816	65.67	NFC-27114	31.18	5 x 2	Plaskite	900	6 1/2
NFC-26784	67.24	NFC-27046	63.77	5 x 2	K-Wheel	900	6 1/2
NFC-26827	50.75	—	—	6 x 2	Vulc. Rubber	410	7 1/2
NFC-26723	46.78	NFC-27155	45.03	6 x 2	Dyna-Tred	550	7 1/2
—	—	NFC-27081	31.74	6 x 2	Polyflex	700	7 1/2
NFC-26811	61.55	NFC-27124	53.11	6 x 2	Semi-Steel	900	7 1/2
NFC-26817	45.59	NFC-27116	36.44	6 x 2	Plaskite	900	7 1/2
NFC-26828	75.14	—	—	6 x 2	Duro-Tred	900	7 1/2
NFC-26829	115.10	NFC-27130	85.80	8 x 2	Duro-Tred	1000	9 1/2

Note: Roll lock brake kits available for all sizes.

**Threaded Stem Applications: 70 - 125 Lbs.**




Ruberex wheels. Self lubricating bearings.

Item No.	Wheel Dia. x Width	Capacity (Lbs.)	OAH	Stem	Price Each
NFC-30660	1 1/2 x 4 7/16	70	2 5/16	3/8-16 x 1 1/2	5.22
NFC-30648	2 x 7/8	80	2 17/32	3/8-16 x 1 1/2	4.48
NFC-30719	3 x 1 3/16	90	3 1/2	3/8-16 x 1 1/2	6.71
NFC-30764	4 x 1 5/16	115	4 11/16	1/2-13 x 1 1/2	12.95
NFC-30797	5 x 1 5/16	125	5 23/32	1/2-13 x 1 1/2	14.31



**Pneumatic Applications: 300 - 350 Lbs.**



Ball bearings. Moves smoothly and safely over rough and bumpy surfaces. Absorbs shock and vibration caused by floor obstructions or outdoor terrains. Four ply tires.

Swivel		Rigid		Tire Diameter	Capacity (Lbs.)	OAH
Item No.	Price Each	Item No.	Price Each			
NFC-46110	66.95	NFC-46111	68.20	8	300	9 1/2
NFC-46112	79.57	NFC-46113	62.79	10	350	11 1/2

STAINLESS STEEL CASTERS

Buy One or Buy Bulk & **SAVE!**

Swivel

**NEW**



Part Number	Wheel Specifications					Plate Specifications					Price Each
	Wheel Diameter x Width (in)	Wheel Type	Capacity (lbs)	OAH (in)	Bearing	Swivel Radius (in)	Overall Size L x W (in)	Mouting Hole Width (in)	Bolt Hole Diameter (in)		
1256091	3.5 x 1.25	Poly/Polypropylene Core	300	4.688	Two Piece Delrin	2.5	3.625 x 2.5	1.75	0.313	32.76	
1256093	3.5 x 1.25	Poly/Polypropylene Core	350	4.688	Delrin	2.5	3.625 x 2.5	1.75	0.313	53.67	
1256094	3.5 x 1.25	TPR	250	4.688	Two Piece Delrin	2.5	3.625 x 2.5	1.75	0.313	44.21	
1256096	4 x 1.25	Poly/Polypropylene Core	350	5.125	Two Piece Delrin	2.5	3.625 x 2.5	1.75	0.313	53.00	
1256098	4 x 1.25	Poly/Polypropylene Core	350	5.125	Two Piece Delrin	2.5	3.625 x 2.5	1.75	0.313	40.38	
1256099	4 x 1.25	TPR	300	5.125	Two Piece Delrin	2.5	3.625 x 2.5	1.75	0.313	46.77	
1256111	5 x 1.25	Polypropylene	350	6.188	Two Piece Delrin	3.0	3.625 x 2.5	1.75	0.313	54.33	
1256113	5 x 1.25	Poly/Polypropylene Core	350	6.188	Two Piece Delrin	3.0	3.625 x 2.5	1.75	0.313	46.77	
1256114	5 x 1.25	Poly/Polypropylene Core	325	6.188	Two Piece Delrin	3.0	3.625 x 2.5	1.75	0.313	52.44	

Swivel with Brake

**NEW**



Part Number	Wheel Specifications					Plate Specifications					Price Each
	Wheel Diameter x Width (in)	Wheel Type	Capacity (lbs)	OAH (in)	Bearing	Swivel Radius (in)	Overall Size L x W (in)	Mouting Hole Width (in)	Bolt Hole Diameter (in)		
1256107	4 x 2	Polyolefin	900	5.625	Two Piece Delrin	1.438	4 x 4.5	2.625 to 3.000	0.375	89.52	
1256108	4 x 2	Urethane	600	5.625	Two Piece Delrin	1.438	4 x 4.5	2.625 to 3.000	0.375	94.27	
1256109	6 x 2	Urethane	375	5.625	Two Piece Delrin	1.438	4 x 4.5	2.625 to 3.000	0.375	90.08	
1256116	5 x 2	Polyolefin	900	6.500	Two Piece Delrin	1.625	4 x 4.5	2.625 to 3.000	0.375	86.86	
1256117	5 x 2	Urethane	900	6.500	Two Piece Delrin	1.625	4 x 4.5	2.625 to 3.000	0.375	98.87	
1256118	5 x 2	Urethane	375	6.500	Two Piece Delrin	1.625	4 x 4.5	2.625 to 3.000	0.375	94.30	
1256138	6 x 2	Urethane	900	7.500	Two Piece Delrin	1.875	4 x 4.5	2.625 to 3.000	0.375	103.42	
1256139	6 x 2	Urethane	600	7.500	Two Piece Delrin	1.875	4 x 4.5	2.625 to 3.000	0.375	98.75	
1256141	6 x 2	Polyolefin	900	7.500	Two Piece Delrin	1.875	4 x 4.5	2.625 to 3.000	0.375	93.07	
1256169	8 x 2	Polyolefin	1200	9.500	Two Piece Delrin	2.375	4 x 4.5	2.625 to 3.000	0.375	97.83	
1256170	8 x 2	Urethane	1000	9.500	Two Piece Delrin	2.375	4 x 4.5	2.625 to 3.000	0.375	118.42	
1256171	6 x 2	Urethane	600	9.500	Two Piece Delrin	2.375	4 x 4.5	2.625 to 3.000	0.375	110.09	

Rigid

**NEW**



Part Number	Wheel Specifications					Plate Specifications					Price Each
	Wheel Diameter x Width (in)	Wheel Type	Capacity (lbs)	OAH (in)	Bearing	Overall Size L x W (in)	Mouting Hole Width (in)	Bolt Hole Diameter (in)			
1256192	3.5 x 1.25	Polypropylene	300	4.688	Two Piece Delrin	3 x 2.5	1.750	0.313	29.39		
1256194	3.5 x 1.25	Poly/Polypropylene Core	350	4.688	Delrin	3 x 2.5	1.750	0.313	32.81		
1256195	3.5 x 1.25	TPR	250	4.688	Two Piece Delrin	3 x 2.5	1.750	0.313	28.75		
1256198	4 x 1.25	Polypropylene	350	5.125	Two Piece Delrin	3.625 x 2.5	1.750	0.313	30.16		
1256200	4 x 1.25	Poly/Polypropylene Core	350	5.125	Two Piece Delrin	3.625 x 2.5	1.750	0.313	21.82		
1256201	4 x 1.25	TPR	300	5.125	Two Piece Delrin	3.625 x 2.5	1.750	0.313	25.86		
1256204	5 x 1.25	Polypropylene	350	6.188	Two Piece Delrin	3.625 x 2.5	1.750	0.313	25.68		
1256206	5 x 1.25	Polypropylene	350	6.188	Two Piece Delrin	3.625 x 2.5	1.750	0.313	30.00		
1256207	5 x 1.25	TPR	325	6.188	Two Piece Delrin	3.625 x 2.5	1.750	0.313	35.34		
1256213	4 x 2	Urethane	600	5.625	Two Piece Delrin	4 x 4.5	2.625 to 3.000	0.375	63.45		
1256214	4 x 2	Soft Rubber	350	5.625	Two Piece Delrin	4 x 4.5	2.625 to 3.000	0.375	59.29		
1256216	4 x 2	Polyolefin	900	5.625	Two Piece Delrin	4 x 4.5	2.625 to 3.000	0.375	53.90		
1256219	5 x 2	Urethane	900	6.500	Two Piece Delrin	4 x 4.5	2.625 to 3.000	0.375	70.76		
1256220	5 x 2	Soft Rubber	375	6.500	Two Piece Delrin	4 x 4.5	2.625 to 3.000	0.375	66.24		
1256222	5 x 2	Polyolefin	900	6.500	Two Piece Delrin	4 x 4.5	2.625 to 3.000	0.375	58.80		
1256223	6 x 2	Urethane	900	7.500	Two Piece Delrin	4 x 4.5	2.625 to 3.000	0.375	74.39		
1256226	6 x 2	Soft Rubber	600	7.500	Two Piece Delrin	4 x 4.5	2.625 to 3.000	0.375	69.77		
1256227	6 x 2	Polyolefin	900	7.500	Two Piece Delrin	4 x 4.5	2.625 to 3.000	0.375	61.31		
1256228	6 x 2	Polyolefin	900	9.500	Two Piece Delrin	4 x 4.5	2.625 to 3.000	0.375	66.37		
1256230	8 x 2	Urethane	1000	5.625	Two Piece Delrin	4 x 4.5	2.625 to 3.000	0.375	88.75		
1256231	8 x 2	Soft Rubber	900	8.500	Two Piece Delrin	4 x 4.5	2.625 to 3.000	0.375	79.35		

STAINLESS STEEL HIGH TEMP CASTERS

Swivel

**NEW**



Part Number	Wheel Specifications					Plate Specifications				Price Each
	Wheel Diameter x Width (in)	Wheel Type	Capacity (lbs)	OAH (in)	Bearing	Swivel Radius (in)	Overall Size L x W (in)	Mouting Hole Width (in)	Bolt Hole Diameter (in)	
1256090	3.5 x 1.25	Nylon	300	4.688	Plain Bore	2.5	3.625 x 2.5	1.75	0.313	53.31
1256092	3.5 x 1.25	Polypropylene Retort	300	4.688	Plain Bore	2.5	3.625 x 2.5	1.75	0.313	57.30
1256095	4.0 x 1.25	Nylon	350	5.125	Plain Bore	2.5	3.625 x 2.5	1.75	0.313	58.52
1256097	4.0 x 1.25	Polypropylene Retort	150	5.125	Plain Bore	2.5	3.625 x 2.5	1.75	0.313	57.19
1256112	5.0 x 1.25	Polypropylene Retort	175	6.188	Plain Bore	3.0	3.625 x 2.5	1.75	0.313	72.32



Nylon

Polypropylene Retort

Swivel with Brake

**NEW**



Part Number	Wheel Specifications					Plate Specifications				Price Each
	Wheel Diameter x Width (in)	Wheel Type	Capacity (lbs)	OAH (in)	Bearing	Swivel Radius (in)	Overall Size L x W (in)	Mouting Hole Width (in)	Bolt Hole Diameter (in)	
1256106	4.0 x 2.0	Nylon	900	5.625	Roller	2.876	4 x 4.5	2.625 to 3.000	0.375	125.55
1256115	5.0 x 2.0	Nylon	900	6.500	Roller	3.25	4 x 4.5	2.625 to 3.000	0.375	127.57
1256140	6.0 x 2.0	Nylon	900	7.500	Roller	3.75	4 x 4.5	2.625 to 3.000	0.375	139.61



Nylon

Rigid

**NEW**



Part Number	Wheel Specifications					Plate Specifications				Price Each
	Wheel Diameter x Width (in)	Wheel Type	Capacity (lbs)	OAH (in)	Bearing	Overall Size L x W (in)	Mouting Hole Width (in)	Bolt Hole Diameter (in)		
1256191	3.5 x 1.25	Nylon	300	4.688	Plain Bore	3.625 x 2.5	1.750	0.313	42.73	
1256193	3.5 x 1.25	Polypropylene Retort	300	4.688	Plain Bore	3.625 x 2.5	1.750	0.313	44.01	
1256197	4.0 x 1.25	Nylon	350	5.125	Plain Bore	3.625 x 2.5	1.750	0.313	37.41	
1256199	4.0 x 1.25	Polypropylene Retort	150	5.125	Plain Bore	3.625 x 2.5	1.750	0.313	36.34	
1256203	5.0 x 1.25	Nylon	350	6.188	Plain Bore	3.625 x 2.5	1.750	0.313	41.45	
1256205	5.0 x 1.25	Polypropylene Retort	175	6.188	Plain Bore	3.625 x 2.5	1.750	0.313	55.05	
1256215	4.0 x 2.0	Nylon	900	5.625	Roller	4.0 x 4.5	2.625 to 3.000	0.375	87.07	
1256221	5.0 x 2.0	Nylon	900	6.500	Roller	4.0 x 4.5	2.625 to 3.000	0.375	101.97	
1256229	6.0 x 2.0	Nylon	900	7.500	Roller	4.0 x 4.5	2.625 to 3.000	0.375	125.04	
1256232	8.0 x 2.0	Nylon	900	9.500	Roller	4.0 x 4.5	2.625 to 3.000	0.375	135.47	



Nylon Plain Bore

Polypropylene Retort

Nylon Roller Bore

**CAN'T FIND  
WHAT YOU'RE  
LOOKING FOR?**

Ask Us. We're here to help!



RIGID CASTERS

Buy One or Buy Bulk & **SAVE!**



**NEW**



TPR



Rubber



Steel



Polyurethane



Polyolefin



Phenolic

Part Number	Wheel Specifications					Plate Specifications				Price Each
	Wheel Diameter x Width (in)	Wheel Type	Capacity (lbs)	OAH (in)	Bearing	Overall Size L x W (in)	Mouting Hole Width (in)	Plate Bolt Hole Diameter (in)		
1256086	3 x .813	Soft Rubber	110	3.500	Plain Bore	2.625 x 3.750	1.750	0.313	6.44	
1256087	3 x .813	TPR	110	3.500	Plain Bore	2.625 x 3.750	1.750	0.313	6.54	
1256088	3 x .813	Hard Rubber	125	3.500	Plain Bore	2.625 x 3.750	1.750	0.313	7.13	
1256089	3 x .813	Polyolefin	125	3.500	Plain Bore	2.625 x 3.750	1.750	0.313	6.26	
1256123	4 x .938	Soft Rubber	125	4.875	Plain Bore	2.625 x 3.750	1.750	0.313	7.31	
1256124	4 x .938	TPR	125	4.875	Plain Bore	2.625 x 3.750	1.750	0.313	9.35	
1256125	4 x .938	Hard Rubber	150	4.875	Plain Bore	2.625 x 3.750	1.750	0.313	10.32	
1256126	4 x .938	Polyolefin	150	4.875	Plain Bore	2.625 x 3.750	1.750	0.313	8.51	
1256147	5 x .938	Soft Rubber	130	5.875	Plain Bore	2.625 x 3.750	1.750	0.313	12.52	
1256148	5 x .938	TPR	130	5.875	Plain Bore	2.625 x 3.750	1.750	0.313	11.35	
1256149	5 x .938	Hard Rubber	150	5.875	Plain Bore	2.625 x 3.750	1.750	0.313	12.52	
1256150	5 x .938	Polyolefin	150	5.875	Plain Bore	2.625 x 3.750	1.750	0.313	8.18	
1256178	2 x .813	Soft Rubber	90	2.500	Plain Bore	1.50 x 2.656	0.938	0.25	2.48	
1256179	2 x .813	Polyolefin	125	2.500	Plain Bore	1.50 x 2.656	0.938	0.25	2.07	
1256180	2 x .813	Hard Rubber	125	2.500	Plain Bore	1.50 x 2.656	0.938	0.25	2.71	
1256181	2 x .813	Steel	125	2.500	Plain Bore	1.50 x 2.656	0.938	0.25	4.75	
1256182	2.5 x 1.125	Soft Rubber	100	3.250	Plain Bore	2.125 x 4.375	1.063	0.313	4.27	
1256183	2.5 x 1.125	Polyolefin	175	3.250	Plain Bore	2.125 x 4.375	1.063	0.313	3.63	
1256184	2.5 x 1.125	Hard Rubber	175	3.250	Plain Bore	2.125 x 4.375	1.063	0.313	4.75	
1256185	2.5 x 1.125	Steel	175	3.250	Plain Bore	2.125 x 4.375	1.063	0.313	7.08	
1256186	3 x 1.250	Polyurethane	250	4.250	Ball Bearings	1.750 x 2.813	2.750 to 3.000	0.313	12.34	
1256187	2 x .813	Soft Rubber	90	3.813	Plain Bore	2.313 x 4.875	1.188	0.313	6.26	
1256188	3 x 1.250	Polyolefin	210	3.813	Plain Bore	2.313 x 4.875	1.188	0.313	5.44	
1256189	3 x 1.250	Hard Rubber	225	3.813	Plain Bore	2.313 x 4.875	1.188	0.313	7.00	
1256190	3 x 1.250	Steel	225	3.813	Plain Bore	2.313 x 4.875	1.188	0.313	8.36	
1256196	4 x 1.250	Polyurethane	300	5.25	Ball Bearings	1.750 x 2.813	2.750 to 3.000	0.313	16.36	
1256202	5 x 1.250	Polyurethane	350	6.25	Ball Bearings	1.750 x 2.813	2.750 to 3.000	0.313	19.68	
1256208	4 x 1.375	Soft Rubber	200	5.000	Plain Bore	3.125 x 6.125	1.750	0.375	13.06	
1256209	4 x 1.375	Polyolefin	250	5.000	Plain Bore	3.125 x 6.125	1.750	0.375	10.50	
1256210	4 x 1.375	Hard Rubber	300	5.000	Plain Bore	3.125 x 6.125	1.750	0.375	14.26	
1256211	4 x 2	Polyurethane	500	5.625	Roller Bearings	4 x 4.5	2.625 to 3.000	0.375	27.55	
1256212	4 x 2	Phenolic	800	5.625	Roller Bearings	4 x 4.5	2.625 to 3.000	0.375	26.37	
1256217	5 x 2	Polyurethane	600	6.500	Roller Bearings	4 x 4.5	2.625 to 3.000	0.375	31.43	
1256218	5 x 2	Phenolic	1000	6.500	Roller Bearings	4 x 4.5	2.625 to 3.000	0.375	29.54	
1256224	6 x 2	Polyurethane	800	7.500	Roller Bearings	4 x 4.5	2.625 to 3.000	0.375	35.83	
1256225	6 x 2	Phenolic	1200	7.500	Roller Bearings	4 x 4.5	2.625 to 3.000	0.375	32.25	

SWIVEL CASTERS



**NEW**




Part Number	Wheel Specifications						Plate Specifications				Price Each
	Wheel Diameter x Width (in)	Wheel Type	Capacity (lbs)	OAH (in)	Bearing	Swivel Radius (in)	Overall Size L x W (in)	Mouting Hole Width (in)	Plate Bolt Hole Diameter (in)		
1256054	2 x .813	Soft Rubber	90	2.500	Plain Bore	1.813	1.938 x 2.563	0.938	0.250	3.53	
1256055	2 x .813	Polyolefin	125	2.500	Plain Bore	1.813	1.938 x 2.563	0.938	0.250	3.12	
1256056	2 x .813	Hard Rubber	125	2.500	Plain Bore	1.813	1.938 x 2.563	0.938	0.250	3.71	
1256057	2 x .813	Steel	125	2.500	Plain Bore	1.813	1.938 x 2.563	0.938	0.250	5.14	
1256058	2 x .813	TPR	80	2.625	Plain Bore	1.938	1.188 x 2	0.813	0.188	4.17	
1256059	2 x .813	Hard Rubber	90	2.625	Plain Bore	1.938	1.188 x 2	0.813	0.188	4.52	
1256060	2 x .813	Polyolefin	90	2.625	Plain Bore	1.938	1.188 x 2	0.813	0.188	3.60	
1256065	2 x .813	Soft Rubber	80	2.625	Plain Bore	1.938	1.188 x 2	0.813	0.188	4.32	
1256066	2.5 x .813	Soft Rubber	80	3.125	Plain Bore	2.125	1.188 x 2	0.813	0.188	4.91	
1256067	2.5 x .813	TPR	80	3.125	Plain Bore	2.125	1.188 x 2	0.813	0.188	4.65	
1256068	2.5 x .813	Hard Rubber	95	3.125	Plain Bore	2.125	1.188 x 2	0.813	0.188	5.01	
1256069	2.5 x .813	Polyolefin	95	3.125	Plain Bore	2.125	1.188 x 2	0.813	0.188	3.99	
1256074	2.5 x 1.125	Soft Rubber	100	3.250	Plain Bore	2.250	2.750 x 3.875	1.750	0.313	6.31	
1256075	2.5 x 1.125	Polyolefin	175	3.250	Plain Bore	2.250	2.750 x 3.875	1.750	0.313	5.47	
1256076	2.5 x 1.125	Hard Rubber	175	3.250	Plain Bore	2.250	2.750 x 3.875	1.750	0.313	6.77	
1256077	2.5 x 1.125	Steel	175	3.250	Plain Bore	2.250	2.750 x 3.875	1.750	0.313	8.77	
1256078	3 x .813	Soft Rubber	110	3.500	Plain Bore	2.500	2.625 x 3.750	1.750	0.313	7.13	
1256079	3 x .813	TPR	110	3.500	Plain Bore	2.500	2.625 x 3.750	1.750	0.313	6.54	
1256080	3 x .813	Hard Rubber	120	3.500	Plain Bore	2.500	2.625 x 3.750	1.750	0.313	7.13	
1256081	3 x .813	Polyolefin	120	3.500	Plain Bore	2.500	2.625 x 3.750	1.750	0.313	6.26	
1256100	3 x 1.250	Soft Rubber	150	3.813	Plain Bore	2.625	3.125 x 4.125	2.375	0.313	8.13	
1256101	3 x 1.250	Polyolefin	210	3.813	Plain Bore	2.625	3.125 x 4.125	2.375	0.313	7.26	
1256102	3 x 1.250	Hard Rubber	225	3.813	Plain Bore	2.625	3.125 x 4.125	2.375	0.313	8.71	
1256103	3 x 1.250	Steel	225	3.813	Plain Bore	2.625	3.125 x 4.125	2.375	0.313	11.81	
1256127	4 x .938	Soft Rubber	125	4.875	Plain Bore	3.438	2.625 x 3.750	1.750	0.313	9.76	
1256128	4 x .938	TPR	125	4.875	Plain Bore	3.438	2.625 x 3.750	1.750	0.313	9.35	
1256129	4 x .938	Hard Rubber	150	4.875	Plain Bore	3.438	2.625 x 3.750	1.750	0.313	10.32	
1256130	4 x .938	Polyolefin	150	4.875	Plain Bore	3.438	2.625 x 3.750	1.750	0.313	8.51	
1256135	4 x 1.375	Soft Rubber	200	5.000	Plain Bore	3.438	4 x 5.125	3.000	0.375	15.95	
1256136	4 x 1.375	Polyolefin	250	5.000	Plain Bore	3.438	4 x 5.125	3.000	0.375	13.95	
1256137	4 x 1.375	Hard Rubber	300	5.000	Plain Bore	3.438	4 x 5.125	3.000	0.375	17.10	
1256151	5 x .938	Soft Rubber	130	5.875	Plain Bore	4.125	2.625 x 3.750	1.750	0.313	12.52	
1256152	5 x .938	TPR	130	5.875	Plain Bore	4.125	2.625 x 3.750	1.750	0.313	11.35	
1256153	5 x .938	Hard Rubber	150	5.875	Plain Bore	4.125	2.625 x 3.750	1.750	0.313	12.52	
1256154	5 x .938	Polyolefin	150	5.875	Plain Bore	4.125	2.625 x 3.750	1.750	0.313	11.12	
1256159	3 x 1.250	Polyurethane	250	4.250	Precision Bearings	4.375	2.625 x 3.750	1.750	0.313	21.34	
1256161	4 x 1.250	Polyurethane	300	5.250	Precision Bearings	4.375	2.625 x 3.750	1.750	0.313	25.48	
1256163	5 x 1.250	Polyurethane	315	6.250	Precision Bearings	4.375	2.625 x 3.750	1.750	0.313	28.34	
1256167	6 x 2	Phenolic	1200	7.500	Roller Bearings	4.750	4 x 4.5	2.625 to 3.000	0.375	37.52	
1256172	4 X 2	Polyurethane	500	5.625	Roller Bearings	5.438	4 x 4.5	2.625 to 3.000	0.375	41.25	
1256173	4 X 2	Phenolic	800	5.625	Roller Bearings	5.438	4.5 x 7	2.625 to 3.000	0.375	45.23	
1256174	5 x 2	Polyurethane	600	6.500	Roller Bearings	5.813	4.5 x 5	2.625 to 3.000	0.375	43.09	
1256175	5 x 2	Phenolic	900	6.500	Roller Bearings	5.813	4.5 x 8	2.625 to 3.000	0.375	48.86	
1256176	6 x 2	Polyurethane	720	7.500	Roller Bearings	6.000	4.5 x 6	2.625 to 3.000	0.375	50.70	
1256177	6 x 2	Phenolic	900	7.500	Roller Bearings	6.000	4.5 x 9	2.625 to 3.000	0.375	47.07	

THREADED STEM CASTERS

Buy One or Buy Bulk & **SAVE!**

**NEW**

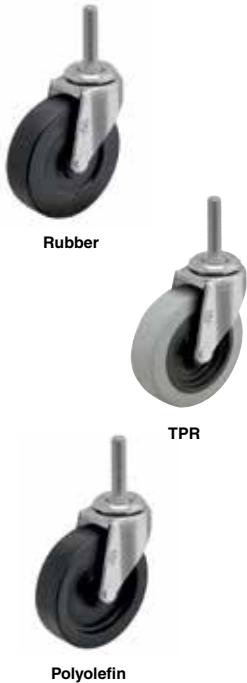

Part Number	Wheel Diameter x Width in	Wheel Type	Capacity lbs	OAH	Bearing	Swivel Radius	Stem Size Length x Width in	Thread Size in	Price Each
1256061	2 x .813	Soft Rubber	80	2.625	Plain Bore	1.938	1-1/2 x 3/8	3/8-16	4.52
1256062	2 x .813	TPR	80	2.625	Plain Bore	1.938	1-1/2 x 3/8	3/8-16	4.37
1256063	2 x .813	Hard Rubber	90	2.625	Plain Bore	1.938	1-1/2 x 3/8	3/8-16	4.73
1256064	2 x .813	Polyolefin	90	2.625	Plain Bore	1.938	1-1/2 x 3/8	3/8-16	3.81
1256070	2.5 x .813	Soft Rubber	80	3.125	Plain Bore	2.125	1-1/2 x 3/8	3/8-16	5.14
1256071	2.5 x .813	TPR	80	3.125	Plain Bore	2.125	1-1/2 x 3/8	3/8-16	4.96
1256072	2.5 x .813	Hard Rubber	95	3.125	Plain Bore	2.125	1-1/2 x 3/8	3/8-16	5.26
1256073	2.5 x .813	Polyolefin	95	3.125	Plain Bore	2.125	1-1/2 x 3/8	3/8-16	4.27
1256082	3 x .813	Soft Rubber	110	3.500	Plain Bore	2.500	1-1/2 x 3/8	3/8-16	5.85
1256083	3 x .813	TPR	110	3.500	Plain Bore	2.500	1-1/2 x 3/8	3/8-16	5.49
1256084	3 x .813	Hard Rubber	125	3.500	Plain Bore	2.500	1-1/2 x 3/8	3/8-16	6.13
1256085	3 x .813	Polyolefin	125	3.500	Plain Bore	2.500	1-1/2 x 3/8	3/8-16	4.86
1256131	4 x .938	Soft Rubber	125	4.750	Plain Bore	3.438	1-1/2 x 3/8	3/8-16	9.33
1256132	4 x .938	TPR	125	4.750	Plain Bore	3.438	1-1/2 x 3/8	3/8-16	8.92
1256133	4 x .938	Hard Rubber	150	4.750	Plain Bore	3.438	1-1/2 x 3/8	3/8-16	9.46
1256134	4 x .938	Polyolefin	150	4.750	Plain Bore	3.438	1-1/2 x 3/8	3/8-16	7.69
1256155	5 x .938	Soft Rubber	130	5.750	Plain Bore	4.125	1-1/2 x 3/8	3/8-16	11.76
1256156	5 x .938	TPR	130	5.750	Plain Bore	4.125	1-1/2 x 3/8	3/8-16	10.58
1256157	5 x .938	Hard Rubber	150	5.750	Plain Bore	4.125	1-1/2 x 3/8	3/8-16	11.76
1256158	5 x .938	Polyolefin	150	5.750	Plain Bore	4.125	1-1/2 x 3/8	3/8-16	10.38


Rolling Star Casters  
Light Duty  
Applications: 33-88 Lbs.



Mobilizes stationary products at a very low overall height. Can be used with chairs, couches and patio furniture.

Item No.	Overall Diameter	Ball Diameter	Wheel Type	Capacity (Lbs.)	Type	OAH	Price Each
WC-BP99-10	3/4	1/2	Nylon	33	Rigid	3/4	1.99
WC-BP99-20	1 1/2	1 3/16	Nylon	88	Rigid	1 1/2	4.36
WC-BP99-30	1 1/2	1 3/16	Nylon	46-57	Spring	2 13/16	4.93

Leveling Casters

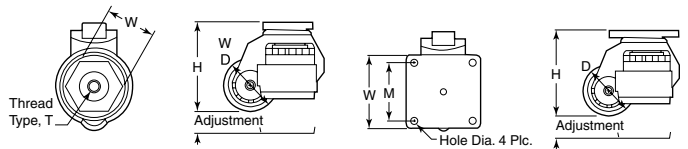


This caster incorporates the feasibility to move equipment easily with a high-grade nylon wheel, leveling, and vibration control. This caster combines precision hand leveling adjustment, anti-vibration control and 360 degree freedom of motion in one unit. Available with either a stud mount or a plate mount.


Item No.	Mount	Load Range Min.	Load Range Max.	H	Adjustment	D	Thread Type T	Thread Depth	Mounting Holes	M	W	Price Each
<b>Style A</b>												
SX-50S	Stud	25	50	2.80	.39	1.65	M8	.47	—	—	1 1/16	47.85
SX-300S	Stud	200	300	3.27	.39	1.97	M12	.59	—	—	1 13/16	69.27
SX-300P	Plate	200	300	3.27	.39	1.97	—	—	.26	2.28	2 1/8	69.27
SX-600S	Stud	300	600	4.02	.59	2.48	M12	.59	—	—	2 1/8	101.16
SX-600P	Plate	400	600	4.02	.59	2.48	—	—	.35	2.76	3 1/8	101.16
SX-1000S	Stud	600	1,000	4.72	.71	2.83	M16	.63	—	—	2 3/4	114.50
SX-1000P	Plate	800	1,000	4.72	.71	2.83	—	—	.43	2.76	3 3/4	114.50
<b>Style B</b>												
SX-200S	Stud	50	200	2.78	.35	1.97	M12	.59	—	—	1 13/16	47.87
SX-200P	Plate	50	200	2.78	.35	1.97	—	—	.26	2.28	2 1/8	47.87
<b>Style C</b>												
SX-400P	Plate	300	400	2.99	.39	1.97	—	—	.35	2.76	3 9/16	78.87
SX-800P	Plate	600	800	3.74	.51	2.83	—	—	.35	2.76	3 3/8	97.37

BALL CASTERS & TRANSFERS


Hevi-Load™  
Inch




Type A



Type B



Type C




Type D

Used for heavier loads than ball casters. Ball transfers use a recirculating ball system to support and facilitate the rotation of the primary ball. The small balls travel on a hardened steel, precision machined track that resists wear and damage. Runs equally well in any position. Ideal where damage and impact protection is essential. Ball units provide instantaneous change of direction not possible with wheel casters.

Item No.	Type	Ball Dia.	Y	W	D	L	E	FxF	CxC	Capacity (Lbs.)	Price Each
SKF-7101	A	.5	.77	.63	.81	—	—	—	—	75	33.93
SKF-7121	A	1.0	1.76	1.52	2	—	—	—	—	700	109.11
SKF-7110	B	.5	1.41	.63	.81	.64	1/2-20	—	—	75	37.89
SKF-7127	B	1.0	2.85	1.68	1.75	.95	1/2-20	—	—	300	100.83
SKF-7131	B	1.0	3.03	1.78	2	1	1/2-20	—	—	700	117.43
SKF-7154	B	1.5	4.50	2.38	2.38	1.60	3/4-16	—	—	2,204	168.24
SKF-7103*	C	.5	.89	.75	.94	.13	.14	1.75	1.37	75	55.25
SKF-7122	C	1.0	1.63	1.41	1.75	.19	.22	2.25	1.75	300	121.88
SKF-7123	C	1.0	1.79	1.54	2	.25	.28	3	2.28	700	151.04
SKF-7104*	D	.5	.88	.44	.94	.13	.14	1.75	1.37	75	57.79
SKF-7152	D	1.5	2.41	1.41	2.38	.50	.28	3	2.28	2,204	221.91

\*Diameter - round


Low Profile  
Metric



Flange mounted ball transfers offer a low profile, multi-directional solution to various material handling, positioning, and/or conveyance applications. All units, except the stainless steel model, come complete with a felt seal. The stainless steel unit is made from 420 stainless steel and has a unique multi-hole filtration system designed to purge out contamination and is provided with no oil/no seal, which allows the unit to operate in harsh conditions by efficiently filtering out debris through the base. Metric dimensions are in millimeters.

Item No.	Ball Dia.	Load Up Cap. Lbs.	Load Down Cap. Lbs.	Fixing Holes	A	B	C	D	E	F	Price Each
<b>Carbon Steel</b>											
SKF-3016	15.8	26	13	2	22.2	41.3	10.2	8.3	3.2	6	4.96
SKF-1008	25.4	121	55	3	37.2	73	14.2	15.8	3.5	6.3	6.86
SKF-2002	39.7	496	220	3	62	94.6	21.2	27.3	6.3	14	30.42
<b>Stainless Steel</b>											
SKF-3274	31.7	276	121	3	45.5	73.7	16.2	19.9	4.2	8	29.21


Medium Duty  
Metric



Zinc plated housing with Type 420 stainless balls. A felt seal is included on all but SKF-701. Maximum temperature is 212 degree Fahrenheit. Dimensions are in millimeters.

Item No.	Ball Dia.	Capacity (Lbs.)	A	B	C	D	E	F	Price Each
SKF-701	15	132	24	31	9.5	21.0	2.8	6.3	7.74
SKF-702	22	352	36	45	9.8	30.0	2.8	5.5	11.74
SKF-703	30	661	45	55	13.8	37.0	4.0	8.3	20.93
SKF-704	45	1,344	62	75	19.0	53.5	4.0	10.0	45.01


Heavy Duty  
Metric



Solid body steel ball transfers were designed for heavy and impact load applications. The units incorporate a seal and self cleaning hole for maximum efficiency and smooth running. They are machined with solid steel bodies and hardened work surfaces. Steel models are steel bodies with chrome steel. Hardness 60-66 HRC, zinc plated finish. Stainless models have stainless bodies A1S1 303 and stainless bearings A1S1 420 or 440, bright machined. All dimensions are in millimeters.

Item No.	Ball Dia.	Capacity (Lbs.)	A mm	B mm	C mm	D mm	E mm	Price Each
<b>Steel</b>								
SKF-2213	22	397	36	45	30.5	9.8	6	22.80
SKF-3013	30	770	45	55	36.8	13.8	8.3	31.76
<b>Stainless</b>								
SKF-2215	22	264	36	45	30.5	9.8	6	56.46

Spring Loaded Ball Transfers  
Inch



Shears, presses and molding machines are just a few of the many applications where open loaded ball transfers can be used. A press for example may have spring loaded ball units set in the platen to facilitate the on and off loading of the workpiece. When the press operates the springs compress and the ball units sink below the surface-leaving the workpiece on a firm base. When pressure is released the ball units rise allowing the ball to roll, enabling the workpiece to be removed easily. Steel bodies with hardened carbon steel balls. "A" style flanges have three equally spaced holes on bolt center diameters (BCD) listed below.

Item No.	Ball Dia.	Support Load (Lbs.)	Load To Fully Depress	A	B	C	D	E	F	Mounting Hole Size BCD	Price Each
SKF-3011	A 3/4	22	66	14	2.03	1.44	2.62	2.48	.31	.27 2.00	75.86
SKF-3009	B 3/4	22	77	.37	2.19	1.44	—	2.56	—	—	52.32
SKF-1018	A 1	77	220	.23	2.10	1.75	3.00	2.64	.31	.27 2.37	86.40
SKF-1016	B 1	77	309	.47	2.31	1.75	—	2.78	—	—	48.15
SKF-1028	A 1 1/4	220	397	.30	3.05	2.31	3.50	3.73	.37	.27 2.87	148.73
SKF-1026	B 1 1/4	220	441	.41	3.34	2.31	—	3.75	—	—	92.22



FURNITURE CASTERS

Buy One or Buy Bulk & **SAVE!**

Furniture Casters  
Light Duty  
Applications: 75-90 Lbs.




Furniture Casters  
Light Duty  
Applications: 100 Lbs.



Swivel Plate



Swivel w/ Brake Plate



Swivel Plate

Plate Specifications		
Plate Type	TPN	TPC
Overall Size	1 1/2 x 1 1/2	1 1/16 x 2
Hole Spacing	1 x 1	1 1/16 x 1 1/16
Hole Dia.	5/32	1/4

Plate Specifications	
Plate Type 92	
Overall Size	1 1/16 x 2
Hole Spacing	1 1/16 x 1 1/16
Hole Dia.	1/4
Bolt Dia.	#10 Screw

Hooded Twin Casters. Available in swivel and swivel with brake. Black polypropylene.

Hooded ball casters. 1/4" diameter rivet axle. Chrome plated finish. Meets or exceeds industry standards.

Swivel w/ Brake		Swivel		Wheel Dia. x Width	Capacity (Lbs.)	OAH	Plate Type
Item No.	Price Each	Item No.	Price Each				
WC-T501-75	1.87	---	---	2 x 1 13/16	75	2 7/16	TPC
WC-T501-85	2.55	---	---	2 x 1 13/16	75	2 5/8	TPN
---	---	WC-T601-60	2.06	2 1/2 x 2	90	2 13/16	TPC

Item No.	Wheel Type	Wheel Dia. x Width	Capacity (Lbs.)	Bearing	OAH	Plate Type	Price Each
WC-9701-10	Vinyl	2 x 2	100	Sintered	2 11/16	92	7.93

Furniture Casters - Plate  
Light-Medium Duty  
Applications: 125-150 Lbs.



Swivel



Swivel w/ Brake



Plate Specifications		
Plate Type	TLE	TPN
Overall Size	1 3/4 x 3	1 1/2 x 1 1/2
Hole Spacing	1 1/8 x 2 1/4	1 x 1
Hole Dia.	5/32	5/32

Open twin wheel casters. Recommended for medical equipment, displays, office equipment, store fixtures and institutional furniture.

Swivel w/ Brake		Swivel		Wheel Type	Wheel Dia. x Width	Capacity (Lbs.)	Bearing	OAH	Plate Type
Item No.	Price Each	Item No.	Price Each						
WC-O001-05	3.46	WC-O001-10	3.21	Polypropylene	3 x 2 7/16	125	Plain	3 3/16	TLE
WC-O001-15	2.96	WC-O001-20	2.71	Polypropylene	3 x 2 7/16	125	Plain	3 3/16	TPN

Furniture Casters  
Light Duty  
Applications: 75-100 Lbs.




Friction Stem Ring




Grip Neck Stem




Threaded Stem



Friction Ring Stem



Grip Neck Stem



Threaded Stem

Item No.	Wheel Type	Wheel Dia. x Width	Capacity (Lbs.)	Bearing	D	L	OAH	Price Each
<b>Friction Ring Stem</b>								
WC-9P04-10	Soft Rubber	2 x 2	75	Sintered	7/16	1 5/8	2 5/8	8.42
<b>Grip Neck Stem</b>								
WC-9P27-10	Vinyl	2 x 2	100	Sintered	5/16	1 1/2	2 11/16	7.98
<b>Threaded Stem</b>								
WC-9704-10	Soft Rubber	2 x 2	75	Sintered	5/16	3/4	2 5/8	8.61

Ball Casters





Plate Specifications	
Plate Type 92	
Overall Size	1 1/16 x 2
Hole Spacing	1 1/16 x 1 1/16
Hole Dia.	1 3/64
Bolt Dia.	1/4

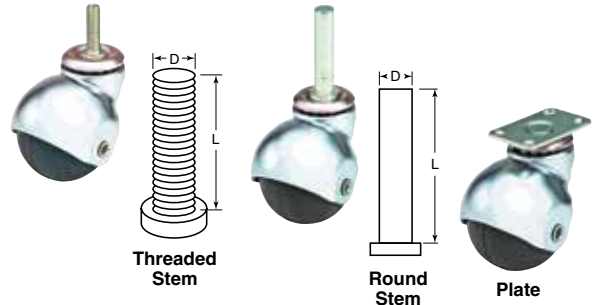

Item No.	D	L	Ball Size	Wheel Type	Finish	Capacity (Lbs.)	OAH	Price Each
<b>Threaded Stem</b>								
WC-414	5/16-18	1	2	Soft Rubber	Chrome	75	2 5/8	8.48
<b>Friction Ring Stem</b>								
WC-413	7/16	1 3/8	2	Soft Rubber	Chrome	75	2 5/8	8.52
<b>Plain Stem</b>								
WC-416	7/16	1 29/32	2	Soft Rubber	Chrome	75	2 5/8	7.99
<b>Plate</b>								
WC-417*	—	—	2	Soft Rubber	Nickel	75	2 1/16	5.60

\* Uses plate type 92

Furniture Casters


Light Duty

Applications: 40-110 Lbs.



Hooded Twin Casters. Available in swivel and swivel with brake. Options include threaded stem, friction ring stem and grip neck.


Swivel		Swivel w/ Brake			Wheel Dia. x Width	Capacity (Lbs.)	D	L	OAH
Item No.	Price Each	Item No.	Price Each	Wheel Material					
<b>Friction Ring Stem</b>									
WC-T501-95	0.70	—	—	Polypropylene	2 x 1 1/8	110	7/16	7/8	2 1/4
WC-T501-15	1.66	WC-T501-50	1.92	Polypropylene	2 x 1 13/16	75	7/16	1	2 1/16
—	—	WC-T501-55	1.79	Polypropylene	2 x 1 13/16	75	7/16	1 1/8	2 1/16
—	—	WC-T501-80	2.61	Polypropylene	2 x 1 13/16	75	7/16	1 1/8	2 5/8
<b>Grip Neck Stem</b>									
WC-T501-10	1.47	—	—	Polypropylene	2 x 1 13/16	75	5/16	1 9/16	2 1/16
WC-T501-30	1.39	WC-T501-25	1.65	Polypropylene	2 x 1 13/16	75	5/16	.960	2 1/16
—	—	WC-T501-40	1.73	Polypropylene	2 x 1 13/16	75	5/16	1 9/16	2 5/8
WC-T601-20	1.29	—	—	Polypropylene	2 x 1 13/16	75	5/16	.960	2 1/16
WC-T501-45	1.41	—	—	Polypropylene	2 x 1 13/16	75	3/8	1 5/8	2 1/16
<b>Threaded Stem</b>									
WC-T401-10	1.21	—	—	Polypropylene	1 5/8 x 1 1/16	40	5/16	3/4	1 13/16
WC-T401-20	1.09	WC-T401-40	1.30	Polypropylene	1 5/8 x 1 1/16	40	5/16	1/2	1 13/16
—	—	WC-T401-30	1.42	Polypropylene	1 5/8 x 1 1/16	40	5/16	3/4	2 1/4
WC-T501-20	1.41	WC-T501-60	1.67	Polypropylene	2 x 1 13/16	75	5/16	1/2	2 1/16
WC-T501-35	2.43	—	—	Polypropylene	2 x 1 13/16	75	5/16	1/2	2 5/8
WC-T601-30	0.82	WC-T501-65	1.70	Polypropylene	2 x 1 13/16	75	5/16	3/4	2 1/16
—	—	WC-T501-70	1.69	Polypropylene	2 x 1 13/16	75	5/16	1	2 1/16
WC-T601-50	1.91	WC-T601-40	2.25	Polypropylene	2 1/2 x 2	90	7/16	1 5/8	2 3/4

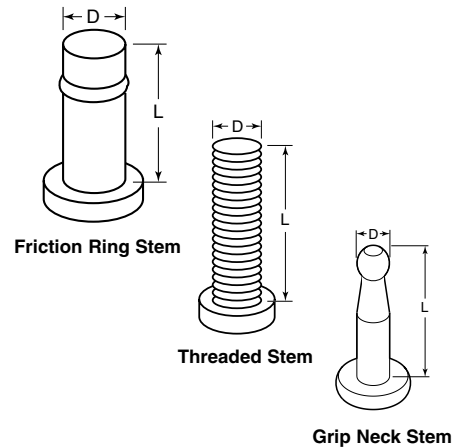

Furniture Casters - Threaded

Light-Medium Duty

Applications: 125 Lbs.



Open twin wheel casters. Recommended for medical equipment, displays, office equipment, store fixtures and institutional furniture.

Item No.	Wheel Type	Wheel Dia. x Width	Capacity (Lbs.)	Plain	OAH	D	L	Price Each
WC-O001-30	Polypropylene	3 x 2 7/16	125	Plain	3 3/16	3/8	1	3.98

STEEL LEVELERS

Buy One or Buy Bulk & SAVE!

Stud Type With Pad



These leveling pads have a 15° swivel off centerline to adjust to uneven surfaces and level machine tools, electronic racks, benches, etc. Hardened ball, except in stainless, prevents galling and forms its own seat. Large diameter pad design assures solid support. All steel parts are zinc plated. Metric dimensions are in millimeters. Metric load ratings are in kilograms.

See pages 347-350 for threaded tube insert glides.

Item No.	A	B	C	D	E	F	Load Capacity	Price Each	Item No.	A	B	C	D	E	F	Load Capacity	Price Each
<b>Steel - Gold Chromate, with 1/8" Elastomer Pad - Inch</b>									<b>Steel - Nickel Plated, with 1/8" Elastomer Pad - Metric</b>								
TE-00	10-32	3/8	21/32	3/4	15/64	1	525	8.07	MLP-315	M6 x 1.00	10	17	19	6	25	235	5.59
TE-10	10-32	3/8	21/32	3/4	15/64	2	525	8.47	MLP-320	M8 x 1.25	12	21	25	7	32	340	6.02
TE-0	1/4-20	1/2	53/64	1	9/32	1 1/4	800	7.06	MLP-325	M10 x 1.50	16	25	32	8	51	1,270	8.28
TE-15	1/4-20	1/2	53/64	1	9/32	2 1/2	800	7.80	MLP-330	M12 x 1.75	20	32	48	10	51	1,700	18.08
TE-1	3/8-16	5/8	1	1 1/4	5/16	2	2,800	8.04	MLP-335	M16 x 2.00	22	35	64	11	51	2,045	18.06
TE-20	3/8-16	5/8	1	1 1/4	5/16	4	2,800	8.24	MLP-340	M20 x 2.50	27	41	76	16	51	2,520	24.82
TE-2	1/2-13	3/4	1 1/4	1 7/8	3/8	2	3,750	10.84	MLP-345	M24 x 3.00	35	51	102	14	89	6,800	30.33
TE-25	1/2-13	3/4	1 1/4	1 7/8	3/8	4	3,750	11.91	MLP-350	M24 x 3.00	35	51	102	14	108	6,800	32.18
TE-3	5/8-11	7/8	1 3/8	2 1/2	7/16	2	4,500	15.80	<b>303 Stainless Steel, with 1/8" Elastomer Pad - Inch</b>								
TE-30	5/8-11	7/8	1 3/8	2 1/2	7/16	4	4,500	19.37	TLE-00SS	10-32	3/8	21/32	3/4	15/64	1	650	9.13
TE-4	3/4-10	1 1/16	1 5/8	3	3/8	2	5,400	21.66	TLE-05S	1/4-20	1/2	53/64	1	9/32	1 1/4	1,000	10.31
TE-35	3/4-10	1 1/16	1 5/8	3	3/8	4	5,400	27.25	TLE-15SS	1/4-20	1/2	53/64	1	9/32	2 1/2	800	11.08
TE-5	1-8	1 3/8	2	4	1 7/32	4 1/4	16,400	36.80	TLE-1SS	3/8-16	5/8	1	1 1/4	5/16	2	2,800	11.62
TE-40	1-8	1 3/8	2	4	1 7/32	8	16,400	42.46	TLE-20SS	3/8-16	5/8	1	1 1/4	5/16	4	2,800	13.70
<b>Steel - Gold Chromate, with 1/8" Elastomer Pad - Metric</b>									<b>TLE-2SS</b>								
MLP-70	M10 x 1.50	17	25	32	8	51	1,273	8.28	TLE-25SS	1/2-13	3/4	1 1/4	1 7/8	3/8	2	3,750	15.75
MLP-75	M12 x 1.75	19	33	48	9	51	1,705	12.40	TLE-3SS	5/8-11	7/8	1 1/8	2 1/2	7/16	2	4,500	26.65
MLP-80	M16 x 2.00	24	35	64	11	51	2,046	18.06	TLE-4SS	3/4-10	1 1/16	1 1/8	3	5/8	2	5,400	37.37
MLP-85	M20 x 2.50	30	41	76	16	51	2,455	24.82	TLE-35SS	3/4-10	1 1/16	1 1/8	3	5/8	4	5,400	43.98
<b>Steel - Clear Chromate, with 1/8" Elastomer Pad - Inch</b>									<b>TLE-5SS</b>								
TES-0	1/4-20	1/2	53/64	1	9/32	1 1/4	800	7.06	TLE-40SS	1-8	1 3/8	2	4	1 7/32	4 1/4	21,000	84.68
TES-16	1/4-20	1/2	53/64	1	9/32	2 1/2	800	7.80	<b>316 Stainless Steel, with 1/8" Elastomer Pad - Metric</b>								
TES-1	3/8-16	5/8	1	1 1/4	5/16	2	2,800	8.04	MLPSS-85	M6 x 1.00	10	17	19	6	25	235	8.31
TES-20	3/8-16	5/8	1	1 1/4	5/16	4	2,800	12.13	MLPSS-90	M8 x 1.25	12	21	25	7	32	340	9.69
TES-2	1/2-13	3/4	1 1/4	1 7/8	3/8	2	3,750	10.84	MLPSS-95	M10 x 1.50	16	25	32	8	51	1,270	12.29
TES-25	1/2-13	3/4	1 1/4	1 7/8	3/8	4	3,750	11.76	MLPSS-100	M12 x 1.75	20	32	48	10	51	1,700	16.75
TES-3	5/8-11	7/8	1 3/8	2 1/2	7/16	2	4,500	15.80	MLPSS-105	M16 x 2.00	22	35	64	11	51	2,045	33.29
TES-30	5/8-11	7/8	1 3/8	2 1/2	7/16	4	4,500	19.37	MLPSS-110	M20 x 2.50	27	41	76	16	51	2,520	46.51
TES-35	3/4-10	1 1/16	1 5/8	3	3/8	4	5,400	27.25	MLPSS-115	M24 x 3.00	35	51	102	14	89	6,800	58.17
TES-40	1-8	1 3/8	2	4	1 7/32	8	16,400	42.46	MLPSS-120	M24 x 3.00	35	51	102	14	108	6,800	61.89
<b>Steel - Black Chromate, with 1/8" Elastomer Pad - Inch</b>									<b>316 Stainless Steel, with 1/8" Elastomer Pad - Inch</b>								
TEBK-0	1/4-20	1/2	53/64	1	9/32	1 1/4	800	7.06	TLESS-00	10-32	3/8	21/32	3/4	15/64	1	525	16.22
TEBK-1	3/8-16	5/8	1	1 1/4	5/16	2	2,800	8.08	TLESS-10	10-32	3/8	21/32	3/4	15/64	2	525	18.89
TEBK-20	3/8-16	5/8	1	1 1/4	5/16	4	2,800	8.24	TLESS-0	1/4-20	1/2	53/64	1	9/32	1 1/4	750	20.31
TEBK-2	1/2-13	3/4	1 1/4	1 7/8	3/8	2	3,750	10.84	TLESS-15	1/4-20	1/2	53/64	1	9/32	2 1/2	750	21.84
TEBK-25	1/2-13	3/4	1 1/4	1 7/8	3/8	4	3,750	11.76	TLESS-1	3/8-16	5/8	1	1 1/4	5/16	2	2,800	24.10
TEBK-3	5/8-11	7/8	1 3/8	2 1/2	7/16	2	4,500	17.65	TLESS-20	3/8-16	5/8	1	1 1/4	5/16	4	2,800	26.36
TEBK-30	5/8-11	7/8	1 3/8	2 1/2	7/16	4	4,500	19.37	TLESS-2	1/2-13	3/4	1 1/4	1 7/8	3/8	2	3,750	35.32
TEBK-4	3/4-10	1 1/16	1 5/8	3	3/8	2	5,400	21.66	TLESS-25	1/2-13	3/4	1 1/4	1 7/8	3/8	4	3,750	39.11
TEBK-35	3/4-10	1 1/16	1 5/8	3	3/8	4	5,400	27.25	TLESS-3	5/8-11	7/8	1 1/8	2 1/2	7/16	2	4,500	53.00
TEBK-5	1-8	1 3/8	2	4	1 7/32	4 1/4	16,400	36.80	TLESS-30	5/8-11	7/8	1 1/8	2 1/2	7/16	4	4,500	61.89
<b>Steel - Black Chromate, with 1/8" Elastomer Pad - Metric</b>									<b>TLESS-4</b>								
MLP-250	M10 x 1.50	17	25	32	8	51	1,273	8.28	TLESS-35	3/4-10	1 1/16	1 1/8	3	5/8	2	5,550	78.61
MLP-260	M16 x 2.00	24	35	64	11	51	2,046	18.06	TLESS-5	1-8	1 3/8	2	4	1 7/32	4 1/4	15,000	96.98
<b>Steel - Nickel Plated, with 1/8" Elastomer Pad - Inch</b>									<b>TLESS-40</b>								
TEN-00	10-32	3/8	21/32	3/4	15/64	1	525	8.34	<b>316 Stainless Steel, with 1/8" Elastomer Pad - Metric</b>								
TEN-10	10-32	3/8	21/32	3/4	15/64	2	525	8.74	MLPSS-125	M6 x 1.00	10	17	19	6	25	235	16.22
TEN-0	1/4-20	1/2	53/64	1	9/32	1 1/4	750	7.30	MLPSS-130	M8 x 1.25	12	21	25	7	32	340	20.31
TEN-15	1/4-20	1/2	53/64	1	9/32	2 1/2	750	8.05	MLPSS-135	M10 x 1.50	16	25	32	8	51	1,270	24.10
TEN-1	3/8-16	5/8	1	1 1/4	5/16	2	2,800	8.32	MLPSS-140	M12 x 1.75	20	32	48	10	51	1,700	35.32
TEN-20	3/8-16	5/8	1	1 1/4	5/16	4	2,800	8.51	MLPSS-145	M16 x 2.00	22	35	64	11	51	2,045	53.00
TEN-2	1/2-13	3/4	1 1/4	1 7/8	3/8	2	3,750	11.22	MLPSS-150	M20 x 2.50	27	41	76	16	51	2,520	78.61
TEN-25	1/2-13	3/4	1 1/4	1 7/8	3/8	4	3,750	12.15	MLPSS-155	M24 x 3.00	35	51	102	14	89	6,800	90.41
TEN-3	5/8-11	7/8	1 3/8	2 1/2	7/16	2	4,500	16.33	MLPSS-160	M24 x 3.00	35	51	102	14	108	6,800	96.98
TEN-30	5/8-11	7/8	1 3/8	2 1/2	7/16	4	4,500	20.01									
TEN-4	3/4-10	1 1/16	1 5/8	3	3/8	2	5,550	22.39									
TEN-35	3/4-10	1 1/16	1 5/8	3	3/8	4	5,550	28.15									
TEN-5	1-8	1 3/8	2	4	1 7/32	4 1/4	15,000	38.02									
TEN-40	1-8	1 3/8	2	4	1 7/32	8	15,000	43.87									

STEEL LEVELERS



Stud Type Without Pad



Steel Gold Chromate      Steel Clear Chromate      Steel Black Chromate      Steel Nickel Plated      Stainless Steel

These leveling pads have a 15° swivel off centerline to adjust to uneven surfaces and level machine tools, electronic racks, benches, etc. Hardened ball, except in stainless, prevents galling and forms its own seat. Large diameter pad design assures solid support. All steel parts are zinc plated. Metric dimensions are in millimeters. Metric load ratings are in kilograms.

See pages 347-350 for threaded tube insert glides.

Item No.	A	B	C	D	E	F	Load Capacity	Item No.	A	B	C	D	E	F	Load Capacity		
<b>Steel - Gold Chromate - Inch</b>								<b>Steel - Nickel Plated - Inch</b>									
TL-00	10-32	3/8	17/32	3/4	7/64	1	700	5.54	TLN-1	3/8-16	3/8	7/8	1 1/4	3/16	2	3,750	8.16
TL-10	10-32	3/8	17/32	3/4	7/64	2	700	6.82	TLN-20	3/8-16	3/8	7/8	1 1/4	3/16	4	3,750	7.76
TL-0	1/4-20	1/2	45/64	1	5/32	1 1/4	1,100	6.22	TLN-2	1/2-13	3/4	1 1/8	1 7/8	1/4	2	5,000	7.97
TL-15	1/4-20	1/2	45/64	1	5/32	2 1/2	1,100	7.02	TLN-25	1/2-13	3/4	1 1/8	1 7/8	1/4	4	5,000	9.73
TL-1	3/8-16	5/8	7/8	1 1/4	3/16	2	3,750	7.90	TLN-3	3/8-11	7/8	1 1/4	2 1/2	5/16	2	6,000	12.02
TL-6	3/8-24	5/8	7/8	1 1/4	3/16	2	3,750	10.29	TLN-30	3/8-11	7/8	1 1/4	2 1/2	5/16	4	6,000	15.55
TL-20	3/8-16	5/8	7/8	1 1/4	3/16	4	3,750	7.51	TLN-4	3/4-10	1 1/16	1 1/2	3	1/2	2	7,400	16.52
TL-2	1/2-13	3/4	1 1/8	1 7/8	1/4	2	5,000	7.71	TLN-35	3/4-10	1 1/16	1 1/2	3	1/2	4	7,400	20.68
TL-7	1/2-20	3/4	1 1/8	1 7/8	1/4	2	5,000	10.89	TLN-5	1-8	1 1/8	1 7/8	4	13/32	4 1/4	20,000	28.12
TL-25	1/2-13	3/4	1 1/8	1 7/8	1/4	4	5,000	8.60	TLN-40	1-8	1 1/8	1 7/8	4	13/32	8	20,000	34.20
TL-3	5/8-11	7/8	1 1/4	2 1/2	5/16	2	6,000	10.95	<b>Steel - Nickel Plated - Metric</b>								
TL-8	5/8-18	7/8	1 1/4	2 1/2	5/16	2	6,000	11.25	MLP-275	M6 x 1.00	10	13	19	3	25	315	5.34
TL-30	5/8-11	7/8	1 1/4	2 1/2	5/16	4	6,000	12.56	MLP-280	M8 x 1.25	12	18	25	4	32	450	6.02
TL-4	3/4-10	1 1/16	1 1/2	3	1/2	2	7,200	13.67	MLP-285	M10 x 1.50	16	22	32	5	51	1,700	7.88
TL-9	3/4-16	1 1/16	1 1/2	3	1/2	2	7,200	14.20	MLP-290	M12 x 1.75	20	29	48	6	51	2,250	10.09
TL-35	3/4-10	1 1/16	1 1/2	3	1/2	4	7,200	17.18	MLP-295	M16 x 2.00	22	32	64	8	51	2,700	17.17
TL-5	1-8	1 1/8	1 7/8	4	13/32	4 1/4	22,000	26.46	MLP-300	M20 x 2.50	27	38	76	13	51	3,350	23.44
TL-11	1-12	1 1/8	1 7/8	4	13/32	4 1/4	22,000	26.46	MLP-305	M24 x 3.00	35	48	102	10	89	9,000	30.07
TL-40	1-8	1 1/8	1 7/8	4	13/32	8	22,000	33.10	MLP-310	M24 x 3.00	35	48	102	10	108	9,000	30.63
<b>Steel - Gold Chromate - Metric</b>								<b>303 Stainless - Inch</b>									
MLP-50	M10 x 1.50	17	22	32	5	51	1,705	7.88	TL-00SS	10-32	3/8	17/32	3/4	7/64	1	900	7.10
MLP-55	M12 x 1.75	19	29	48	6	51	2,273	10.09	TL-10SS	10-32	3/8	17/32	3/4	7/64	2	700	7.93
MLP-60	M16 x 2.00	24	32	64	8	51	2,727	17.17	TL-0SS	1/4-20	1/2	45/64	1	5/32	1 1/4	1,480	7.83
MLP-65	M20 x 2.50	30	38	76	13	51	3,273	23.44	TL-15SS	1/4-20	1/2	45/64	1	5/32	2 1/2	1,100	8.65
<b>Steel - Clear Chromate - Inch</b>								<b>TL-1SS</b>									
TLS-00	10-32	3/8	17/32	3/4	7/64	1	700	5.54	TL-1SS	3/8-16	5/8	7/8	1 1/4	3/16	2	3,750	9.92
TLS-10	10-32	3/8	17/32	3/4	7/64	2	700	6.82	TL-20SS	3/8-16	5/8	7/8	1 1/4	3/16	4	3,750	11.34
TLS-0	1/4-20	1/2	45/64	1	5/32	1 1/4	1,100	6.22	TL-2SS	1/2-13	3/4	1 1/8	1 7/8	1/4	2	5,000	14.25
TLS-15	1/4-20	1/2	45/64	1	5/32	2 1/2	1,100	7.02	TL-25SS	1/2-13	3/4	1 1/8	1 7/8	1/4	4	5,000	16.39
TLS-1	3/8-16	5/8	7/8	1 1/4	3/16	2	3,750	7.90	TL-3SS	3/8-11	7/8	1 1/4	2 1/2	5/16	2	6,000	24.29
TLS-20	3/8-16	5/8	7/8	1 1/4	3/16	4	3,750	7.51	TL-30SS	3/8-11	7/8	1 1/4	2 1/2	5/16	4	6,000	29.37
TLS-2	1/2-13	3/4	1 1/8	1 7/8	1/4	2	5,000	10.95	TL-4SS	3/4-10	1 1/16	1 1/2	3	1/2	2	7,200	32.20
TLS-25	1/2-13	3/4	1 1/8	1 7/8	1/4	4	5,000	8.60	TL-35SS	3/4-10	1 1/16	1 1/2	3	1/2	4	7,200	39.19
TLS-3	5/8-11	7/8	1 1/4	2 1/2	5/16	2	6,000	10.95	TL-5SS	1-8	1 1/8	1 7/8	4	13/32	4 1/4	22,000	70.41
TLS-30	5/8-11	7/8	1 1/4	2 1/2	5/16	4	6,000	12.56	TL-40SS	1-8	1 1/8	1 7/8	4	13/32	8	22,000	89.48
TLS-4	3/4-10	1 1/16	1 1/2	3	1/2	2	7,200	13.67	<b>303 Stainless - Metric</b>								
TLS-35	3/4-10	1 1/16	1 1/2	3	1/2	4	7,200	17.18	MLPSS-5	M6 x 1.00	10	13	19	3	25	315	7.72
TLS-5	1-8	1 1/8	1 7/8	4	13/32	4 1/4	22,000	26.46	MLPSS-10	M8 x 1.25	12	18	25	4	32	450	8.82
TLS-40	1-8	1 1/8	1 7/8	4	13/32	8	22,000	33.10	MLPSS-15	M10 x 1.50	16	22	32	5	51	1,700	11.13
<b>Steel - Clear Chromate - Metric</b>								<b>MLPSS-20</b>									
MLP-230	M10 x 1.50	17	22	32	5	51	1,705	7.88	MLPSS-20	M12 x 1.75	20	29	48	6	51	2,250	15.42
MLP-235	M12 x 1.75	19	29	48	6	51	2,273	10.09	MLPSS-25	M16 x 2.00	22	32	64	8	51	2,700	31.77
MLP-240	M16 x 2.00	24	32	64	8	51	2,727	17.17	MLPSS-30	M20 x 2.50	27	38	76	13	51	3,350	44.67
MLP-245	M20 x 2.50	30	38	76	13	51	3,273	23.44	MLPSS-35	M24 x 3.00	35	48	102	10	89	9,000	56.04
<b>Steel - Black Chromate - Inch</b>								<b>MLPSS-40</b>									
TLBK-00	10-32	3/8	17/32	3/4	7/64	1	700	5.54	MLPSS-40	M24 x 3.00	35	48	102	10	108	9,000	59.74
TLBK-0	1/4-20	1/2	45/64	1	5/32	1 1/4	1,100	6.22	<b>316 Stainless - Inch</b>								
TLBK-15	1/4-20	1/2	45/64	1	5/32	2 1/2	1,100	7.02	TLSS-00	10-32	3/8	17/32	3/4	7/64	1	700	15.54
TLBK-1	3/8-16	5/8	7/8	1 1/4	3/16	2	3,750	8.04	TLSS-10	10-32	3/8	17/32	3/4	7/64	2	700	17.55
TLBK-20	3/8-16	5/8	7/8	1 1/4	3/16	4	3,750	7.51	TLSS-0	1/4-20	1/2	45/64	1	5/32	1 1/4	1,000	19.36
TLBK-2	1/2-13	3/4	1 1/8	1 7/8	1/4	2	5,000	7.71	TLSS-15	1/4-20	1/2	45/64	1	5/32	2 1/2	1,000	20.89
TLBK-25	1/2-13	3/4	1 1/8	1 7/8	1/4	4	5,000	8.60	TLSS-1	3/8-16	5/8	7/8	1 1/4	3/16	2	3,750	23.09
TLBK-3	5/8-11	7/8	1 1/4	2 1/2	5/16	2	6,000	10.63	TLSS-20	3/8-16	5/8	7/8	1 1/4	3/16	4	3,750	25.40
TLBK-30	5/8-11	7/8	1 1/4	2 1/2	5/16	4	6,000	20.87	TLSS-2	1/2-13	3/4	1 1/8	1 7/8	1/4	2	5,000	33.85
TLBK-4	3/4-10	1 1/16	1 1/2	3	1/2	2	7,200	13.67	TLSS-25	1/2-13	3/4	1 1/8	1 7/8	1/4	4	5,000	37.60
TLBK-35	3/4-10	1 1/16	1 1/2	3	1/2	4	7,200	17.18	TLSS-3	3/8-11	7/8	1 1/4	2 1/2	5/16	2	6,000	51.28
TLBK-5	1-8	1 1/8	1 7/8	4	13/32	4 1/4	22,000	26.46	TLSS-30	3/8-11	7/8	1 1/4	2 1/2	5/16	4	6,000	54.68
TLBK-40	1-8	1 1/8	1 7/8	4	13/32	8	22,000	33.10	TLSS-4	3/4-10	1 1/16	1 1/2	3	1/2	2	7,400	76.93
<b>Steel - Black Chromate - Metric</b>								<b>TLSS-35</b>									
MLP-210	M10 x 1.50	17	22	32	5	51	1,705	7.88	TLSS-35	3/4-10	1 1/16	1 1/2	3	1/2	4	7,400	84.91
MLP-215	M12 x 1.75	19	29	48	6	51	2,273	10.09	TLSS-5	1-8	1 1/8	1 7/8	4	13/32	4 1/4	20,000	93.53
MLP-220	M16 x 2.00	24	32	64	8	51	2,727	17.17	TLSS-40	1-8	1 1/8	1 7/8	4	13/32	8	20,000	107.99
MLP-225	M20 x 2.50	30	38	76	13	51	3,273	23.44	<b>316 Stainless - Metric</b>								
<b>Steel - Nickel Plated - Inch</b>								<b>MLPSS-45</b>									
TLN-00	10-32	3/8	17/32	3/4	7/64	1	700	5.72	MLPSS-45	M6 x 1.00	10	13	19	3	25	315	15.54
TLN-10	10-32	3/8	17/32	3/4	7/64	2	700	7.05	MLPSS-50	M8 x 1.25	12	18	25	4	32	450	19.36
TLN-0	1/4-20	1/2	45/64	1	5/32	1 1/4	1,000	6.43	MLPSS-55	M10 x 1.50	16	22	32	5	51	1,700	23.09
TLN-15	1/4-20	1/2	45/64	1	5/32	2 1/2	1,000	7.25	MLPSS-60	M12 x 1.75	20	29	48	6	51	2,250	33.85
<b>Steel - Nickel Plated - Metric</b>								<b>MLPSS-65</b>									
MLPSS-5	M6 x 1.00	10	13	19	3	25	315	5.34	MLPSS-70	M20 x 2.50	27	38	76				

STEEL LEVELERS

Buy One or Buy Bulk & **SAVE!**

Socket Type With Pad



Steel - Gold Chromate



Steel - Clear Chromate



Steel - Black Chromate




Steel - Nickel Plated



Stainless Steel

These leveling pads have a 15 degree swivel off centerline to adjust to uneven surfaces and level machine tools, electronic racks, benches, etc. Hardened ball, except in stainless, prevents galling and forms its own seat. Large diameter pad design assures solid support. All steel parts are zinc plated. Metric dimensions are in millimeters. Metric load ratings are in kilograms.



Item No.	A	Min. Thd. Depth	B	C	D	E	Load Capacity	Price Each
<b>Steel - Gold Chromate, with 1/8" Elastomer Pad - Inch</b>								
LE-5	10-32	17/100	3/8	3/8	3/4	7/25	525	7.37
LE-6	1/4-20	31/100	1/2	1	1	7/25	800	5.93
LE-0	3/8-16	19/50	5/8	1	1 1/4	5/16	2,800	6.62
LE-1	1/2-13	7/8	3/4	1 1/4	1 7/8	3/8	3,750	8.07
LE-2	5/8-11	7/8	7/8	1 7/8	2 1/2	7/16	4,500	13.75
LE-3	3/4-10	31/50	1 1/16	1 7/8	3	5/8	5,400	17.47
LE-4	1-8	81/100	1 3/8	2	4	17/32	16,400	23.28
<b>Steel - Gold Chromate, with 1/8" Elastomer Pad - Metric</b>								
MLP-25	M10 x 1.50	9.6	17	25	32	8	1,273	7.60
MLP-30	M12 x 1.75	11.2	19	33	48	9	1,705	9.16
MLP-35	M16 x 2.00	11.2	24	35	64	11	2,046	15.72
MLP-40	M20 x 2.50	15.7	30	41	76	16	2,455	20.07
<b>Steel - Clear Chromate, with 1/8" Elastomer Pad - Inch</b>								
LES-5	10-32	17/100	3/8	3/8	3/4	7/25	525	7.14
LES-6	1/4-20	31/100	1/2	1	1	7/25	800	5.93
LES-0	3/8-16	19/50	5/8	1	1 1/4	5/16	2,800	6.62
LES-1	1/2-13	7/8	3/4	1 1/4	1 7/8	3/8	3,750	8.07
LES-2	5/8-11	7/8	7/8	1 7/8	2 1/2	7/16	4,500	13.75
<b>Steel - Black Chromate, with 1/8" Elastomer Pad - Inch</b>								
LEBK-5	10-32	17/100	3/8	3/8	3/4	7/25	525	7.14
LEBK-6	1/4-20	31/100	1/2	1	1	7/25	800	5.93
LEBK-0	3/8-16	19/50	5/8	1	1 1/4	5/16	2,800	6.62
LEBK-1	1/2-13	7/8	3/4	1 1/4	1 7/8	3/8	3,750	8.07
LEBK-3	3/4-10	31/50	1 1/16	1 7/8	3	5/8	5,400	17.47
LEBK-4	1-8	81/100	1 3/8	2	4	17/32	16,400	23.28
<b>Steel - Nickel Plated, with 1/8" Elastomer Pad - Inch</b>								
LEN-5	10-32	17/100	3/8	3/8	3/4	7/25	525	7.37
LEN-6	1/4-20	31/100	1/2	1	1	7/25	750	6.14
LEN-0	3/8-16	19/50	5/8	1	1 1/4	5/16	2,800	6.84
LEN-1	1/2-13	7/8	3/4	1 1/4	1 7/8	3/8	3,750	8.34
LEN-2	5/8-11	7/8	7/8	1 7/8	2 1/2	7/16	4,500	14.21
LEN-3	3/4-10	31/50	1 1/16	1 7/8	3	5/8	5,550	18.06
LEN-4	1-8	81/100	1 3/8	2	4	17/32	15,000	24.05
<b>Steel - Nickel Plated, with 1/8" Elastomer Pad - Metric</b>								
MLP-390	M6 x 1.00	4	10	17	19	6	235	4.58
MLP-395	M8 x 1.25	8	12	21	25	7	340	5.08
MLP-400	M10 x 1.50	10	16	25	32	8	1,270	6.74
MLP-405	M12 x 1.75	11	20	32	48	10	1,700	8.21
MLP-410	M16 x 2.00	11	22	35	64	11	2,045	14.03
MLP-415	M20 x 2.50	16	27	41	76	16	2,520	18.67
MLP-420	M24 x 3.00	20	35	51	102	14	6,800	27.76
<b>303 Stainless Steel, with 1/8" Elastomer Pad - Inch</b>								
LE-6SS	1/4-20	31/100	1/2	1	1	7/25	1,000	8.86
LE-0SS	3/8-16	19/50	5/8	1	1 1/4	5/16	2,800	11.12
LE-1SS	1/2-13	7/8	3/4	1 1/4	1 7/8	3/8	3,750	12.11
LE-2SS	5/8-11	7/8	7/8	1 7/8	2 1/2	7/16	4,500	19.43
LE-3SS	3/4-10	31/50	1 1/16	1 7/8	3	5/8	5,400	29.21
LE-4SS	1-8	81/100	1 3/8	2	4	59/100	21,000	40.59
<b>303 Stainless Steel, with 1/8" Elastomer Pad - Metric</b>								
MLPSS-235	M6 x 1.00	4	10	17	19	6	235	5.85
MLPSS-240	M8 x 1.25	8	12	21	25	7	340	7.67
MLPSS-245	M10 x 1.50	10	16	25	32	8	1,270	9.83
MLPSS-250	M12 x 1.75	11	20	32	48	10	1,700	13.70
MLPSS-255	M16 x 2.00	11	22	35	64	11	2,045	23.80
MLPSS-260	M20 x 2.50	16	27	41	76	16	2,520	36.26
MLPSS-265	M24 x 3.00	20	35	51	102	14	6,800	49.05
<b>316 Stainless Steel, with 1/8" Elastomer Pad - Inch</b>								
LESS-5	10-32	17/100	3/8	3/8	3/4	7/25	525	8.16
LESS-6	1/4-20	31/100	1/2	1	1	7/25	750	9.24
LESS-0	3/8-16	19/50	5/8	1	1 1/4	5/16	2,800	13.65
LESS-1	1/2-13	7/8	3/4	1 1/4	1 7/8	3/8	3,750	22.86
LESS-2	5/8-11	7/8	7/8	1 7/8	2 1/2	7/16	4,500	40.28
LESS-3	3/4-10	31/50	1 1/16	1 7/8	3	5/8	5,550	61.35
LESS-4	1-8	81/100	1 3/8	2	4	17/32	15,000	82.25
<b>316 Stainless Steel, with 1/8" Elastomer Pad - Metric</b>								
MLPSS-270	M6 x 1.00	4	10	17	19	6	235	8.16
MLPSS-275	M8 x 1.25	8	12	21	25	7	340	9.24
MLPSS-280	M10 x 1.50	10	16	25	32	8	1,270	13.65
MLPSS-285	M12 x 1.75	11	20	32	48	10	1,700	22.86
MLPSS-290	M16 x 2.00	11	22	35	64	11	2,045	40.28
MLPSS-295	M20 x 2.50	16	27	41	76	16	2,520	61.35
MLPSS-300	M24 x 3.00	20	35	51	102	14	6,800	82.25



Socket Type  
Without Pad



Steel - Gold Chromate



Steel - Clear Chromate



Steel - Black Chromate




Steel - Nickel Plated



Stainless Steel

These leveling pads have a 15 degree swivel off centerline to adjust to uneven surfaces and level machine tools, electronic racks, benches, etc. Hardened ball, except in stainless, prevents galling and forms its own seat. Large diameter pad design assures solid support. All steel parts are zinc plated. Metric dimensions are in millimeters. Metric load ratings are in kilograms.



Item No.	A	Min. Thd. Depth	B	C	D	E	Load Capacity	Price Each
<b>Steel - Gold Chromate - Inch</b>								
L-5	10-32	17/100	3/8	53/100	3/4	1/8	700	5.49
L-6	1/4-20	31/100	1/2	7/10	1	3/20	1,100	5.13
L-0	3/8-16	19/50	5/8	7/8	1 1/4	3/16	3,750	5.26
L-7	3/8-24	19/50	5/8	7/8	1 1/4	3/16	2,800	6.22
L-1	1/2-13	4/8	3/4	1 1/4	1 7/8	1/4	5,000	6.53
L-8	1/2-20	4/8	3/4	1 1/4	1 7/8	1/4	3,750	11.15
L-2	3/8-11	4/8	7/8	1 1/4	2 1/2	5/16	6,000	9.25
L-9	3/8-18	4/8	7/8	1 1/4	2 1/2	5/16	4,500	10.95
L-3	3/4-10	31/50	1 1/16	1 1/2	3	1/2	7,200	12.82
L-10	3/4-16	31/50	1 1/16	1 1/2	3	1/2	5,400	15.47
L-4	1-8	81/100	1 3/8	1 7/8	4	1 3/32	22,000	21.56
L-11	1-12	81/100	1 3/8	1 7/8	4	1 3/32	22,000	25.35
<b>Steel - Gold Chromate - Metric</b>								
MLP-5	M10 x 1.50	9.6	17	22	32	5	1,705	4.94
MLP-10	M12 x 1.75	11.2	19	29	48	6	2,273	5.47
MLP-15	M16 x 2.00	11.2	24	32	64	8	2,727	9.25
MLP-20	M20 x 2.50	15.7	30	38	76	13	3,273	14.80
<b>Steel - Clear Chromate - Inch</b>								
LS-5	10-32	17/100	3/8	53/100	3/4	1/8	700	5.49
LS-16	1/4-20	31/100	1/2	7/10	1	3/20	1,080	5.13
LS-0	3/8-16	19/50	5/8	7/8	1 1/4	3/16	3,750	5.26
LS-1	1/2-13	4/8	3/4	1 1/4	1 7/8	1/4	5,000	13.28
LS-2	3/8-11	4/8	7/8	1 1/4	2 1/2	5/16	6,000	9.25
LS-13	3/4-10	31/50	1 1/16	1 1/2	3	1/2	7,200	12.82
LS-14	1-8	81/100	1 3/8	1 7/8	4	1 3/32	21,870	21.56
<b>Steel - Clear Chromate - Metric</b>								
MLP-160	M16 x 2.00	11.2	24	32	64	8	2,727	9.25
MLP-165	M20 x 2.50	15.7	30	38	76	13	3,273	14.80
<b>Steel - Black Chromate - Inch</b>								
LBK-5	10-32	17/100	3/8	53/100	3/4	1/8	700	5.49
LBK-6	1/4-20	31/100	1/2	7/10	1	3/20	1,080	5.13
LBK-0	3/8-16	19/50	5/8	7/8	1 1/4	3/16	3,750	5.26
LBK-1	1/2-13	4/8	3/4	1 1/4	1 7/8	1/4	5,000	6.53
LBK-2	3/8-11	4/8	7/8	1 1/4	2 1/2	5/16	6,000	9.25
LBK-3	3/4-10	31/50	1 1/16	1 1/2	3	1/2	7,200	12.82
LBK-4	1-8	81/100	1 3/8	1 7/8	4	1 3/32	21,870	21.56
<b>Steel - Black Chromate - Metric</b>								
MLP-130	M10 x 1.50	9.6	17	22	32	5	1,705	4.94
MLP-135	M12 x 1.75	11.2	19	29	48	6	2,273	5.47
MLP-140	M16 x 2.00	11.2	24	32	64	8	2,727	9.25
MLP-145	M20 x 2.50	15.7	30	38	76	13	3,273	14.80

Item No.	A	Min. Thd. Depth	B	C	D	E	Load Capacity	Price Each
<b>Steel - Nickel Plated - Inch</b>								
LNP-5	10-32	17/100	3/8	53/100	3/4	1/8	700	5.68
LNP-6	1/4-20	31/100	1/2	7/10	1	3/20	1,000	5.31
LNP-0	3/8-16	19/50	5/8	7/8	1 1/4	3/16	3,750	5.45
LNP-1	1/2-13	4/8	3/4	1 1/4	1 7/8	1/4	5,000	6.74
LNP-2	3/8-11	4/8	7/8	1 1/4	2 1/2	5/16	6,000	10.62
LNP-3	3/4-10	31/50	1 1/16	1 1/2	3	1/2	7,400	14.32
LNP-4	1-8	81/100	1 3/8	1 7/8	4	1 3/32	20,000	22.28
<b>Steel - Nickel Plated - Metric</b>								
MLP-355	M6 x 1.00	4	10	13	19	3	315	3.78
MLP-360	M8 x 1.25	8	12	18	25	4	450	4.26
MLP-365	M10 x 1.50	10	16	22	32	5	1,700	6.44
MLP-370	M12 x 1.75	11	20	29	48	6	2,250	7.95
MLP-375	M16 x 2.00	11	22	32	64	8	2,700	12.65
MLP-380	M20 x 2.50	16	27	38	76	13	3,350	17.07
MLP-385	M24 x 3.00	20	35	48	102	10	9,000	22.10
<b>303 Stainless Steel - Inch</b>								
L-5SS	10-32	17/100	3/8	53/100	3/4	1/8	900	6.45
L-6SS	1/4-20	31/100	1/2	7/10	1	3/20	1,400	6.44
L-0SS	3/8-16	19/50	5/8	7/8	1 1/4	3/16	3,750	8.10
L-1SS	1/2-13	4/8	3/4	1 1/4	1 7/8	1/4	5,000	10.61
L-2SS	3/8-11	4/8	7/8	1 1/4	2 1/2	5/16	6,000	16.21
L-3SS	3/4-10	31/50	1 1/16	1 1/2	3	1/2	7,200	24.22
L-4SS	1-8	81/100	1 3/8	1 7/8	4	1 3/32	28,000	52.94
<b>303 Stainless Steel - Metric</b>								
MLPSS-165	M6 x 1.00	4	10	13	19	3	315	5.24
MLPSS-170	M8 x 1.25	8	12	18	25	4	450	6.80
MLPSS-175	M10 x 1.50	10	16	22	32	5	1,700	8.68
MLPSS-180	M12 x 1.75	11	20	29	48	6	2,250	12.36
MLPSS-185	M16 x 2.00	11	22	32	64	8	2,700	22.28
MLPSS-190	M20 x 2.50	16	27	38	76	13	3,350	34.42
MLPSS-195	M24 x 3.00	20	35	48	102	10	9,000	46.90
<b>316 Stainless Steel - Inch</b>								
LSS-5	10-32	17/100	3/8	53/100	3/4	1/8	700	7.78
LSS-6	1/4-20	31/100	1/2	7/10	1	3/20	1,000	11.54
LSS-0	3/8-16	19/50	5/8	7/8	1 1/4	3/16	3,750	13.77
LSS-1	1/2-13	4/8	3/4	1 1/4	1 7/8	1/4	5,000	19.46
LSS-2	3/8-11	4/8	7/8	1 1/4	2 1/2	5/16	6,000	33.52
LSS-3	3/4-10	31/50	1 1/16	1 1/2	3	1/2	7,400	53.89
LSS-4	1-8	81/100	1 3/8	1 7/8	4	1 3/32	20,000	72.91
<b>316 Stainless Steel - Metric</b>								
MLPSS-200	M6 x 1.00	4	10	13	19	3	315	7.78
MLPSS-205	M8 x 1.25	8	12	18	25	4	450	11.54
MLPSS-210	M10 x 1.50	10	16	22	32	5	1,700	13.77
MLPSS-215	M12 x 1.75	11	20	29	48	6	2,250	19.46
MLPSS-220	M16 x 2.00	11	22	32	64	8	2,700	35.06
MLPSS-225	M20 x 2.50	16	27	38	76	13	3,350	53.89
MLPSS-230	M24 x 3.00	20	35	48	102	10	9,000	72.91

**STEEL LEVELERS**

**Stud Type**




Steel - Gold Chromate



Steel - Nickel Plated



Stainless Steel



**Socket Type**




Steel - Gold Chromate



Steel - Nickel Plated



Stainless Steel



See pages 347-350 for threaded tube insert glides.

Item No.	A	B	C	D	E	F	Load Capacity	Price Each
<b>Steel - Gold Chromate - Inch</b>								
HVTL-00	10-32	3/8	17/32	3/4	7/64	1	700	4.41
HVTL-10	10-32	3/8	17/32	3/4	7/64	2	700	5.33
HVTL-0	1/4-20	1/2	45/64	1	5/32	1 1/4	1,100	4.85
HVTL-15	1/4-20	1/2	45/64	1	5/32	2 1/2	1,100	6.69
HVTL-1	3/8-16	5/8	7/8	1 1/4	3/16	2	3,750	6.24
HVTL-20	3/8-16	5/8	7/8	1 1/4	3/16	4	3,750	7.84
HVTL-2	1/2-13	3/4	1 1/8	1 7/8	1/4	2	5,000	7.58
HVTL-25	1/2-13	3/4	1 1/8	1 7/8	1/4	4	5,000	10.76
HVTL-3	5/8-11	7/8	1 1/4	2 1/2	5/16	2	6,000	12.18
HVTL-30	5/8-11	7/8	1 1/4	2 1/2	5/16	4	6,000	16.91
HVTL-4	3/4-10	1 1/16	1 1/2	3	1/2	2	7,200	16.77
HVTL-35	3/4-10	1 1/16	1 1/2	3	1/2	4	7,200	21.78
HVTL-5	1-8	1 3/8	1 7/8	4	13/32	4 1/4	22,000	24.74
HVTL-40	1-8	1 3/8	1 7/8	4	13/32	8	22,000	31.08
<b>Steel - Gold Chromate - Metric</b>								
HVTM-5	M6 x 1.00	10	13.5	19.1	2.8	25.4	700	5.34
HVTM-10	M8 x 1.25	13	17.8	25.4	3.8	31.8	1,100	6.05
HVTM-15	M10 x 1.50	17	22	32	5	51	3,750	7.02
HVTM-20	M12 x 1.75	19	29	48	6	51	5,000	10.86
HVTM-25	M16 x 2.00	24	32	64	8	51	6,000	16.94
HVTM-30	M20 x 2.50	30	38	76	13	51	7,200	24.09
HVTM-35	M24 x 3.00	36	48	102	10	108	22,000	30.77
<b>Steel - Nickel Plated - Inch</b>								
HVTL-00N	10-32	3/8	17/32	3/4	7/64	1	700	4.41
HVTL-10N	10-32	3/8	17/32	3/4	7/64	2	700	5.33
HVTL-0N	1/4-20	1/2	45/64	1	5/32	1 1/4	1,100	4.85
HVTL-15N	1/4-20	1/2	45/64	1	5/32	2 1/2	1,100	6.69
HVTL-1N	3/8-16	5/8	7/8	1 1/4	3/16	2	3,750	6.24
HVTL-20N	3/8-16	5/8	7/8	1 1/4	3/16	4	3,750	7.84
HVTL-2N	1/2-13	3/4	1 1/8	1 7/8	1/4	2	5,000	7.58
HVTL-25N	1/2-13	3/4	1 1/8	1 7/8	1/4	4	5,000	10.76
HVTL-3N	5/8-11	7/8	1 1/4	2 1/2	5/16	2	6,000	12.18
HVTL-30N	5/8-11	7/8	1 1/4	2 1/2	5/16	4	6,000	16.91
HVTL-4N	3/4-10	1 1/16	1 1/2	3	1/2	2	7,200	16.77
HVTL-35N	3/4-10	1 1/16	1 1/2	3	1/2	4	7,200	21.78
HVTL-5N	1-8	1 3/8	1 7/8	4	13/32	4 1/4	22,000	24.37
HVTL-40N	1-8	1 3/8	1 7/8	4	13/32	8	22,000	31.08
<b>Steel - Nickel Plated - Metric</b>								
HVTM-5N	M6 x 1.00	10	13.5	19.1	2.8	25.4	700	5.34
HVTM-10N	M8 x 1.25	13	17.8	25.4	3.8	31.8	1,100	6.05
HVTM-15N	M10 x 1.50	17	22	32	5	51	3,750	7.02
HVTM-20N	M12 x 1.75	19	29	48	6	51	5,000	10.86
HVTM-25N	M16 x 2.00	24	32	64	8	51	6,000	16.94
HVTM-30N	M20 x 2.50	30	38	76	13	51	7,200	24.09
HVTM-35N	M24 x 3.00	36	48	102	10	108	22,000	29.69
<b>303 Stainless Steel - Inch</b>								
HVTL-00SS	10-32	3/8	17/32	3/4	7/64	1	900	9.69
HVTL-10SS	10-32	3/8	17/32	3/4	7/64	2	700	10.66
HVTL-0SS	1/4-20	1/2	45/64	1	5/32	1 1/4	1,480	13.21
HVTL-15SS	1/4-20	1/2	45/64	1	5/32	2 1/2	1,100	13.50
HVTL-1SS	3/8-16	5/8	7/8	1 1/4	3/16	2	3,750	15.89
HVTL-20SS	3/8-16	5/8	7/8	1 1/4	3/16	4	3,750	17.65
HVTL-2SS	1/2-13	3/4	1 1/8	1 7/8	1/4	2	5,000	23.21
HVTL-25SS	1/2-13	3/4	1 1/8	1 7/8	1/4	4	5,000	24.46
HVTL-3SS	5/8-11	7/8	1 1/4	2 1/2	5/16	2	6,000	38.25
HVTL-30SS	5/8-11	7/8	1 1/4	2 1/2	5/16	4	6,000	41.22
HVTL-4SS	3/4-10	1 1/16	1 1/2	3	1/2	2	7,200	53.21
HVTL-35SS	3/4-10	1 1/16	1 1/2	3	1/2	4	7,200	54.43
HVTL-5SS	1-8	1 3/8	1 7/8	4	13/32	4 1/4	22,000	68.04
HVTL-40SS	1-8	1 3/8	1 7/8	4	13/32	8	22,000	73.66
<b>303 Stainless Steel - Metric</b>								
HVTM-5SS	M6 x 1.00	10	13.5	19.1	2.8	25.4	700	13.18
HVTM-10SS	M8 x 1.25	13	17.8	25.4	3.8	31.8	1,100	16.20
HVTM-15SS	M10 x 1.50	17	22	32	5	51	3,750	19.89
HVTM-20SS	M12 x 1.75	19	29	48	6	51	5,000	27.97
HVTM-25SS	M16 x 2.00	24	32	64	8	51	6,000	46.09
HVTM-30SS	M20 x 2.50	30	38	76	13	51	7,200	64.13
HVTM-35SS	M24 x 3.00	36	48	102	10	108	22,000	88.78

Item No.	A	B	C	D	E	Load Capacity	Price Each
<b>Steel - Gold Chromate - Inch</b>							
HVL-5	10-32	3/8	17/32	3/4	7/64	700	3.17
HVL-6	1/4-20	1/2	45/64	1	5/32	1,100	4.01
HVL-0	3/8-16	5/8	7/8	1 1/4	3/16	3,750	4.64
HVL-1	1/2-13	3/4	1 1/8	1 7/8	1/4	5,000	5.88
HVL-2	3/8-16	5/8	7/8	1 1/4	3/16	6,000	10.21
HVL-3	3/4-10	1 1/16	1 1/2	3	1/2	7,200	13.42
HVL-4	1-8	1 3/8	1 7/8	4	13/32	22,000	19.59
<b>Steel - Gold Chromate - Metric</b>							
HVLM-5	M6 x 1.00	10	13.5	19.1	2.8	700	3.78
HVLM-10	M8 x 1.25	13	17.8	25.4	3.8	1,100	4.27
HVLM-15	M10 x 1.50	17	22	32	5	3,750	6.76
HVLM-20	M12 x 1.75	19	29	48	6	5,000	8.37
HVLM-25	M16 x 2.00	24	32	64	8	6,000	14.19
HVLM-30	M20 x 2.50	30	38	76	13	7,200	18.43
HVLM-35	M24 x 3.00	35	48	102	10	22,000	23.23
<b>Steel - Nickel Plated - Inch</b>							
HVL-5N	10-32	3/8	17/32	3/4	7/64	700	3.17
HVL-6N	1/4-20	1/2	45/64	1	5/32	1,100	4.01
HVL-0N	3/8-16	5/8	7/8	1 1/4	3/16	3,750	4.64
HVL-1N	1/2-13	3/4	1 1/8	1 7/8	1/4	5,000	5.88
HVL-2N	3/8-16	5/8	7/8	1 1/4	3/16	6,000	10.21
HVL-3N	3/4-10	1 1/16	1 1/2	3	1/2	7,200	13.42
HVL-4N	1-8	1 3/8	1 7/8	4	13/32	22,000	18.65
<b>Steel - Nickel Plated - Metric</b>							
HVLM-5N	M6 x 1.00	10	13.5	19.1	2.8	700	3.78
HVLM-10N	M8 x 1.25	13	17.8	25.4	3.8	1,100	4.27
HVLM-15N	M10 x 1.50	17	22	32	5	3,750	6.76
HVLM-20N	M12 x 1.75	19	29	48	6	5,000	8.37
HVLM-25N	M16 x 2.00	24	32	64	8	6,000	14.19
HVLM-30N	M20 x 2.50	30	38	76	13	7,200	18.43
HVLM-35N	M24 x 3.00	35	48	102	10	22,000	23.23
<b>303 Stainless Steel - Inch</b>							
HVL-5SS	10-32	3/8	17/32	3/4	7/64	700	6.46
HVL-6SS	1/4-20	1/2	45/64	1	5/32	1,100	10.06
HVL-0SS	3/8-16	5/8	7/8	1 1/4	3/16	3,750	10.98
HVL-1SS	1/2-13	3/4	1 1/8	1 7/8	1/4	5,000	15.72
HVL-2SS	3/8-16	5/8	7/8	1 1/4	3/16	6,000	28.87
HVL-3SS	3/4-10	1 1/16	1 1/2	3	1/2	7,200	42.59
HVL-4SS	1-8	1 3/8	1 7/8	4	13/32	22,000	57.58
<b>303 Stainless Steel - Metric</b>							
HVLM-5SS	M6 x 1.00	10	13.5	19.1	2.8	700	8.19
HVLM-10SS	M8 x 1.25	13	17.8	25.4	3.8	1,100	12.12
HVLM-15SS	M10 x 1.50	17	22	32	5	3,750	14.19
HVLM-20SS	M12 x 1.75	19	29	48	6	5,000	22.01
HVLM-25SS	M16 x 2.00	24	32	64	8	6,000	35.96
HVLM-30SS	M20 x 2.50	30	38	76	13	7,200	53.94
HVLM-35SS	M24 x 3.00	35	48	102	10	22,000	74.84

**Rubber Covers for Leveling Pads**



Slip over leveling pads to reduce walking and vibration. Made of polyvinyl chloride.

Item No.	For Pad Dia.	Price Each
NWP-51	1 1/4	2.26
NWP-52	1 7/8	2.56
NWP-53	2 1/2	2.84
NWP-54	3	4.22

STEEL LEVELERS

Stud Type With Pad




Steel - Gold Chromate



Steel - Nickel Plated



Stainless Steel



Socket Type With Pad




Steel - Gold Chromate



Steel - Nickel Plated



Stainless Steel



See pages 347-350 for threaded tube insert glides.

Item No.	A	B	C	D	E	F	Load Capacity	Price Each
<b>Steel - Gold Chromate, with 1/8" Elastomer - Inch</b>								
HVTLE-00	10-32	3/8	2 1/32	3/4	7/64	1	525	5.34
HVTLE-10	10-32	3/8	2 1/32	3/4	7/64	2	525	7.40
HVTLE-0	1/4-20	1/2	5 3/64	1	5/32	1 1/4	800	5.90
HVTLE-15	1/4-20	1/2	5 3/64	1	5/32	2 1/2	800	7.68
HVTLE-1	3/8-16	5/8	1	1 1/4	3/16	2	2,800	6.37
HVTLE-20	3/8-16	5/8	1	1 1/4	3/16	4	2,800	8.27
HVTLE-2	1/2-13	3/4	1 1/4	1 7/8	1/4	4	3,750	9.21
HVTLE-25	1/2-13	3/4	1 1/4	1 7/8	1/4	4	3,750	12.00
HVTLE-3	5/8-11	7/8	1 3/8	2 1/2	5/16	2	4,500	12.92
HVTLE-30	5/8-11	7/8	1 3/8	2 1/2	5/16	4	4,500	17.39
HVTLE-4	3/4-10	1 1/16	1 3/8	3	1/2	2	5,400	24.69
HVTLE-35	3/4-10	1 1/16	1 3/8	3	1/2	4	5,400	23.35
HVTLE-5	1-8	1 3/8	2	4	1 3/32	4 1/4	16,400	33.95
HVTLE-40	1-8	1 3/8	2	4	1 3/32	8	16,400	41.40

Item No.	A	B	C	D	E	F	Load Capacity	Price Each
<b>Steel - Gold Chromate, with 1/8" Elastomer - Metric</b>								
HVTME-5	M6 x 1.00	10	15.5	19.1	5.8	25.4	525	6.46
HVTME-10	M8 x 1.25	13	20.8	25.4	6.8	31.8	800	6.93
HVTME-15	M10 x 1.50	17	25	32	8	51	2,800	7.31
HVTME-20	M12 x 1.75	19	32	48	9	51	3,750	12.71
HVTME-25	M16 x 2.00	24	35	64	11	51	4,500	18.14
HVTME-30	M20 x 2.50	30	41	76	16	51	5,400	26.62
HVTME-35	M24 x 3.00	36	51	102	13	108	16,400	39.50

Item No.	A	B	C	D	E	F	Load Capacity	Price Each
<b>Steel - Nickel Plated, with 1/8" Elastomer - Inch</b>								
HVTLE-00N	10-32	3/8	2 1/32	3/4	7/64	1	525	5.34
HVTLE-10N	10-32	3/8	2 1/32	3/4	7/64	2	525	7.40
HVTLE-0N	1/4-20	1/2	5 3/64	1	5/32	1 1/4	800	5.90
HVTLE-15N	1/4-20	1/2	5 3/64	1	5/32	2 1/2	800	7.68
HVTLE-1N	3/8-16	5/8	1	1 1/4	3/16	2	2,800	6.37
HVTLE-20N	3/8-16	5/8	1	1 1/4	3/16	4	2,800	8.27
HVTLE-2N	1/2-13	3/4	1 1/4	1 7/8	1/4	2	3,750	9.21
HVTLE-25N	1/2-13	3/4	1 1/4	1 7/8	1/4	4	3,750	14.22
HVTLE-3N	5/8-11	7/8	1 3/8	2 1/2	5/16	2	4,500	12.92
HVTLE-30N	5/8-11	7/8	1 3/8	2 1/2	5/16	4	4,500	17.39
HVTLE-4N	3/4-10	1 1/16	1 3/8	3	1/2	2	5,400	26.51
HVTLE-35N	3/4-10	1 1/16	1 3/8	3	1/2	4	5,400	23.35
HVTLE-5N	1-8	1 3/8	2	4	1 3/32	4 1/4	16,400	33.10
HVTLE-40N	1-8	1 3/8	2	4	1 3/32	8	16,400	42.64

Item No.	A	B	C	D	E	F	Load Capacity	Price Each
<b>Steel - Nickel Plated, with 1/8" Elastomer - Metric</b>								
HVTME-5N	M6 x 1.00	10	15.5	19.1	5.8	25.4	525	5.43
HVTME-10N	M8 x 1.25	13	20.8	25.4	6.8	31.8	800	6.13
HVTME-15N	M10 x 1.50	17	25	32	8	51	2,800	7.31
HVTME-20N	M12 x 1.75	19	32	48	9	51	3,750	11.24
HVTME-25N	M16 x 2.00	24	35	64	11	51	4,500	17.19
HVTME-30N	M20 x 2.50	30	41	76	16	51	5,400	24.41
HVTME-35N	M24 x 3.00	36	51	102	13	108	16,400	30.07

Item No.	A	B	C	D	E	F	Load Capacity	Price Each
<b>303 Stainless Steel, with 1/8" Elastomer - Inch</b>								
HVTLE-00SS	10-32	3/8	2 1/32	3/4	7/64	1	525	12.01
HVTLE-10SS	10-32	3/8	2 1/32	3/4	7/64	2	525	13.33
HVTLE-0SS	1/4-20	1/2	5 3/64	1	5/32	1 1/4	800	13.93
HVTLE-15SS	1/4-20	1/2	5 3/64	1	5/32	2 1/2	800	17.09
HVTLE-1SS	3/8-16	5/8	1	1 1/4	3/16	2	2,800	14.13
HVTLE-20SS	3/8-16	5/8	1	1 1/4	3/16	4	2,800	19.02
HVTLE-2SS	1/2-13	3/4	1 1/4	1 7/8	1/4	2	3,750	24.65
HVTLE-25SS	1/2-13	3/4	1 1/4	1 7/8	1/4	4	3,750	27.75
HVTLE-3SS	5/8-11	7/8	1 3/8	2 1/2	5/16	2	4,500	40.63
HVTLE-30SS	5/8-11	7/8	1 3/8	2 1/2	5/16	4	4,500	42.31
HVTLE-4SS	3/4-10	1 1/16	1 3/8	3	1/2	2	5,400	55.94
HVTLE-35SS	3/4-10	1 1/16	1 3/8	3	1/2	4	5,400	62.19
HVTLE-5SS	1-8	1 3/8	2	4	1 3/32	4 1/4	16,400	88.83
HVTLE-40SS	1-8	1 3/8	2	4	1 3/32	8	16,400	114.53

Item No.	A	B	C	D	E	F	Load Capacity	Price Each
<b>303 Stainless Steel, with 1/8" Elastomer - Metric</b>								
HVTME-5SS	M6 x 1.00	10	15.5	19.1	5.8	25.4	525	15.56
HVTME-10SS	M8 x 1.25	13	20.8	25.4	6.8	31.8	800	17.42
HVTME-15SS	M10 x 1.50	17	25	32	8	51	2,800	17.62
HVTME-20SS	M12 x 1.75	19	32	48	9	51	3,750	30.02
HVTME-25SS	M16 x 2.00	24	35	64	11	51	4,500	49.19
HVTME-30SS	M20 x 2.50	30	41	76	16	51	5,400	67.18
HVTME-35SS	M24 x 3.00	36	51	102	13	108	16,400	107.15

Item No.	A	B	C	D	E	Load Capacity	Price Each
<b>Steel - Gold Chromate, with 1/8" Elastomer - Inch</b>							
HVLE-5	10-32	3/8	2 1/32	3/4	7/64	525	4.16
HVLE-6	1/4-20	1/2	5 3/64	1	5/32	800	4.95
HVLE-0	3/8-16	5/8	1	1 1/4	3/16	2,800	6.03
HVLE-1	1/2-13	3/4	1 1/4	1 7/8	1/4	3,750	6.58
HVLE-2	5/8-11	7/8	1 3/8	2 1/2	5/16	4,500	11.24
HVLE-3	3/4-10	1 1/16	1 3/8	3	1/2	5,400	14.33
HVLE-4	1-8	1 3/8	2	4	1 3/32	16,400	26.74

Item No.	A	B	C	D	E	Load Capacity	Price Each
<b>Steel - Gold Chromate, with 1/8" Elastomer - Metric</b>							
HVLM-5	M6 x 1.00	10	16.5	19.1	5.8	525	4.85
HVLM-10	M8 x 1.25	13	20.8	25.4	6.8	800	5.26
HVLM-15	M10 x 1.50	17	25	32	8	2,800	7.77
HVLM-20	M12 x 1.75	19	32	48	9	3,750	9.36
HVLM-25	M16 x 2.00	24	35	64	11	4,500	15.70
HVLM-30	M20 x 2.50	30	41	76	16	5,400	19.98
HVLM-35	M24 x 3.00	35	51	102	13	16,400	31.28

Item No.	A	B	C	D	E	Load Capacity	Price Each
<b>Steel - Nickel Plated, with 1/8" Elastomer - Inch</b>							
HVLE-5N	10-32	3/8	2 1/32	3/4	7/64	525	4.16
HVLE-6N	1/4-20	1/2	5 3/64	1	5/32	800	4.95
HVLE-0N	3/8-16	5/8	1	1 1/4	3/16	2,800	6.03
HVLE-1N	1/2-13	3/4	1 1/4	1 7/8	1/4	3,750	7.20
HVLE-2N	5/8-11	7/8	1 3/8	2 1/2	5/16	4,500	11.24
HVLE-3N	3/4-10	1 1/16	1 3/8	3	1/2	5,400	14.73
HVLE-4N	1-8	1 3/8	2	4	1 3/32	16,400	26.22

Item No.	A	B	C	D	E	Load Capacity	Price Each
<b>Steel - Nickel Plated, with 1/8" Elastomer - Metric</b>							
HVLM-5N	M6 x 1.00	10	16.5	19.1	5.8	525	3.85
HVLM-10N	M8 x 1.25	13	20.8	25.4	6.8	800	6.03
HVLM-15N	M10 x 1.50	17	25	32	8	2,800	6.86
HVLM-20N	M12 x 1.75	19	32	48	9	3,750	8.49
HVLM-25N	M16 x 2.00	24	35	64	11	4,500	14.37
HVLM-30N	M20 x 2.50	30	41	76	16	5,400	18.67
HVLM-35N	M24 x 3.00	35	51	102	13	16,400	23.54

Item No.	A	B	C	D	E	Load Capacity	Price Each
<b>303 Stainless Steel, with 1/8" Elastomer - Inch</b>							
HVLE-5SS	10-32	3/8	2 1/32	3/4	7/64	525	8.72
HVLE-6SS	1/4-20	1/2	5 3/64	1	5/32	800	10.78
HVLE-0SS	3/8-16	5/8	1	1 1/4	3/16	2,800	14.90
HVLE-1SS	1/2-13	3/4	1 1/4	1 7/8	1/4	3,750	21.64
HVLE-2SS	5/8-11	7/8	1 3/8	2 1/2	5/16	4,500	36.45
HVLE-3SS	3/4-10	1 1/16	1 3/8	3	1/2	5,400	49.18
HVLE-4SS	1-8	1 3/8	2	4	1 3/32	16,400	74.13

Item No.	A	B	C	D	E	Load Capacity	Price Each
<b>303 Stainless Steel, with 1/8" Elastomer - Metric</b>							
HVLM-5SS	M6 x 1.00	10	16.5	19.1	5.8	525	10.52
HVLM-10SS	M8 x 1.25	13	20.8	25.4	6.8	800	13.20
HVLM-15SS	M10 x 1.50	17	25	32	8	2,800	16.23
HVLM-20SS	M12 x 1.75	19	32	48	9	3,750	23.98
HVLM-25SS	M16 x 2.00	24	35	64	11	4,500	38.95
HVLM-30SS	M20 x 2.50	30	41	76	16		




**STEEL LEVELERS**

These leveling pads have a 15 degree swivel off centerline to adjust to uneven surfaces and level machine tools, electronic racks, benches, etc. Hardened ball prevents galling and forms its own seat. Large diameter pad design assures solid support. Lag holes provided for mounting to the floor. Zinc plated with gold chrome finish.

**Stud Type with Lag Holes**



Steel - Gold Chromate



Item No.	A	B	C	D	E	F	G	H	For Socket Cap Screw I	Load Capacity	Price Each
RSL-1000	5/8-11	7/8	1 1/4	2 1/2	5/16	2	1.592	1.97	5/16-18	6,000	13.96
RSL-1001	5/8-11	7/8	1 1/4	2 1/2	5/16	4	1.592	1.97	5/16-18	6,000	15.26
RSL-1002	3/4-10	1 1/8	1 1/2	3	1/2	2	1.84	2.41	3/8-16	7,200	16.00
RSL-1003	3/4-10	1 1/8	1 1/2	3	1/2	4	1.84	2.41	3/8-16	7,200	17.79
RSL-1004	1-8	1 3/8	1 7/8	4	1 3/32	4 1/2	2.395	3.23	1/2-13	22,000	24.86


**Socket Type Acme Threads**



Steel - Gold Chromate



Stainless Steel




Tapped leveling mount is suitable for light, medium and heavy-duty applications. Mount swivels 15 degrees in all directions for optimum performance on uneven surfaces. Ball is case hardened. Low carbon steel with yellow zinc plating.

Item No.	A	B	D	E	Load Capacity	Price Each
<b>Steel - Gold Chromate</b>						
ACM-165	1/4-16	1	1 1/8	1/2	1,500	4.85
ACM-170	5/16-14	1 1/4	7/8	5/8	3,750	7.00
ACM-175	3/8-12	1 1/4	7/8	5/8	5,625	7.31
ACM-180	1/2-10	1 7/8	1 1/8	3/4	7,500	9.73
ACM-185	5/8-8	2 1/2	1 1/4	7/8	9,000	15.36
ACM-190	3/4-6	3	1 1/2	1 1/8	11,100	20.17
ACM-195	1-5	4	1 7/8	1 3/8	30,000	28.55
<b>303 Stainless Steel</b>						
ACM-200	1/4-16	1	1 1/8	1/2	1,500	12.12
ACM-205	5/16-14	1 1/4	7/8	5/8	3,750	14.46
ACM-210	3/8-12	1 1/4	7/8	5/8	5,625	14.79
ACM-215	1/2-10	1 7/8	1 1/8	3/4	7,500	20.44
ACM-220	5/8-8	2 1/2	1 1/4	7/8	9,000	36.84
ACM-225	3/4-6	3	1 1/2	1 1/8	11,100	56.58
ACM-230	1-5	4	1 7/8	1 3/8	30,000	76.38

**Socket Type with Lag Holes**



Steel - Gold Chromate



Item No.	A	B	C	D	E	G	H	For Socket Cap Screw I	Load Capacity	Price Each
RSL-2000	5/8-11	7/8	1 1/4	2 1/2	5/16	1.592	1.97	5/16-18	6,000	15.50
RSL-2001	3/4-10	1 1/8	1 1/2	3	1/2	1.84	2.41	3/8-16	7,200	20.28
RSL-2002	1-8	1 3/8	1 7/8	4	1 3/32	2.395	3.23	1/2-13	22,000	26.36


**Stud Type Acme Threads**



Steel - Gold Chromate



Stainless Steel



Stud leveling mounts are threaded from solid hex stock and then case-hardened for maximum strength and durability. Mounts are suitable for light, medium and heavy-duty applications and swivel 15 degrees in all directions for optimum performance on uneven surfaces. Ball is case hardened. Low carbon steel with yellow zinc plating.


See pages 347-350 for threaded tube insert glides.

Item No.	A	B	C	D	E	Load Capacity	Price Each
<b>Steel - Gold Chromate</b>							
ACM-5	1/4-16	1	1 1/4	1 1/8	1/2	1,500	6.74
ACM-10	1/4-16	1	2 1/2	1 1/8	1/2	1,500	7.31
ACM-15	5/16-14	1 1/4	2	7/8	5/8	3,750	8.74
ACM-20	5/16-14	1 1/4	4	7/8	5/8	3,750	9.02
ACM-25	3/8-12	1 1/4	2	7/8	5/8	5,625	8.96
ACM-30	3/8-12	1 1/4	4	7/8	5/8	5,625	10.37
ACM-35	1/2-10	1 7/8	2	1 1/8	3/4	7,500	12.39
ACM-40	1/2-10	1 7/8	4	1 1/8	3/4	7,500	16.52
ACM-45	5/8-8	2 1/2	2	1 1/4	7/8	9,000	19.90
ACM-50	5/8-8	2 1/2	4	1 1/4	7/8	9,000	26.23
ACM-55	3/4-6	3	2	1 1/2	1 1/8	11,100	25.18
ACM-60	3/4-6	3	4	1 1/2	1 1/8	11,100	31.48
ACM-65	1-5	4	3 1/2	1 7/8	1 3/8	30,000	38.41
ACM-70	1-5	4	4 1/4	1 7/8	1 3/8	30,000	40.82
ACM-75	1-5	4	6	1 7/8	1 3/8	30,000	44.88
ACM-80	1-5	4	8	1 7/8	1 3/8	30,000	49.37
<b>303 Stainless Steel</b>							
ACM-85	1/4-16	1	1 1/4	1 1/8	1/2	1,500	18.11
ACM-90	1/4-16	1	2 1/2	1 1/8	1/2	1,500	19.55
ACM-95	5/16-14	1 1/4	2	7/8	5/8	3,750	21.36
ACM-100	5/16-14	1 1/4	4	7/8	5/8	3,750	23.50
ACM-105	3/8-12	1 1/4	2	7/8	5/8	5,625	28.77
ACM-110	3/8-12	1 1/4	4	7/8	5/8	5,625	23.78
ACM-115	1/2-10	1 7/8	2	1 1/8	3/4	7,500	31.71
ACM-120	1/2-10	1 7/8	4	1 1/8	3/4	7,500	35.21
ACM-125	5/8-8	2 1/2	2	1 1/4	7/8	9,000	48.03
ACM-130	5/8-8	2 1/2	4	1 1/4	7/8	9,000	51.18
ACM-135	3/4-6	3	2	1 1/2	1 1/8	11,100	72.03
ACM-140	3/4-6	3	4	1 1/2	1 1/8	11,100	79.50
ACM-145	1-5	4	3 1/2	1 7/8	1 3/8	30,000	83.06
ACM-150	1-5	4	4 1/4	1 7/8	1 3/8	30,000	87.71
ACM-155	1-5	4	6	1 7/8	1 3/8	30,000	92.23
ACM-160	1-5	4	8	1 7/8	1 3/8	30,000	104.84

Stud Type



Steel - Gold Chromate



See pages 347-350 for threaded tube insert glides.


Gold		Black		A	B	C	D	E	F	Load Capacity
Item No.	Price Each	Item No.	Price Each							
RSL-1	9.88	RSL-101	9.88	10-32	3/8	17/32	3/4	7/64	1	700
RSL-2	8.86	RSL-102	8.86	1/4-20	1/2	45/64	1	3/32	1 1/4	1,100
RSL-3	10.21	RSL-103	10.21	3/8-16	5/8	7/8	1 1/4	3/16	2	3,750
RSL-4	9.71	RSL-104	11.28	1/2-13	3/4	1 1/8	1 7/8	1/4	2	5,000
RSL-5	18.92	RSL-105	11.48	5/8-11	7/8	1 1/4	2 1/2	5/16	2	6,000
RSL-6	13.52	RSL-106	13.52	3/4-10	1 1/16	1 1/2	3	1/2	2	7,200
RSL-7	33.35	RSL-107	22.87	1-8	1 3/8	1 7/8	4	1 1/32	4 1/4	22,000

These leveling pads have a 15° swivel off centerline to adjust to uneven surfaces and level machine tools, electronic racks, benches, etc. Hardened ball, except in stainless, prevents galling and forms its own seat. Large diameter pad design assures solid support. All steel parts are zinc plated. Metric dimensions are in millimeters. Metric load ratings are in kilograms.

Socket Type



Stainless Steel




Item No.	A	Min. Thd. Depth	B	C	D	E	Load Capacity	Price Each
<b>303 Stainless Steel, with Delrin Pad - Inch</b>								
LD-5SS	10-32	.17	3/8	53/100	3/4	1/8	150	10.98
LD-6SS	1/4-20	.31	1/2	7/10	1	3/20	200	13.54
LD-0SS	3/8-16	.38	5/8	7/8	1 1/4	3/16	300	15.65
LD-1SS	1/2-13	.44	3/4	1 1/8	1 7/8	1/4	700	19.89
LD-3SS	3/4-10	.62	1 1/16	1 1/2	3	1/2	1,800	42.98
LD-4SS	1-8	.81	1 3/8	1 7/8	4	1 1/32	2,400	71.09

Stud Type



Stainless Steel




See pages 347-350 for threaded tube insert glides.

Item No.	A	B	C	D	E	F	Load Capacity	Price Each
<b>303 Stainless Steel, with Delrin Pad - Inch</b>								
TD-00SS	10-32	3/8	17/32	3/4	7/64	1	525	10.29
TD-10SS	10-32	3/8	17/32	3/4	7/64	2	150	13.42
TD-0SS	1/4-20	1/2	45/64	1	3/32	1 1/4	800	15.04
TD-15SS	1/4-20	1/2	45/64	1	3/32	2 1/2	200	16.56
TD-2SS	3/8-16	5/8	7/8	1 1/4	3/16	2	2,800	15.20
TD-20SS	3/8-16	5/8	7/8	1 1/4	3/16	4	300	16.76
TD-2SS	1/2-13	3/4	1 1/8	1 7/8	1/4	2	3,750	22.07
TD-25SS	1/2-13	3/4	1 1/8	1 7/8	1/4	4	3,750	24.29
TD-3SS	5/8-11	7/8	1 1/4	2 1/2	5/16	2	4,500	44.25
TD-30SS	5/8-11	7/8	1 1/4	2 1/2	5/16	4	1,200	43.80
TD-4SS	3/4-10	1 1/16	1 1/2	3	1/2	2	5,400	47.77
TD-35SS	3/4-10	1 1/16	1 1/2	3	1/2	4	1,800	62.27
TD-5SS	1-8	1 3/8	1 7/8	4	1 1/32	4 1/4	16,400	66.65

Socket Type



Steel - Gold Chromate




Gold		Black		A	B	C	D	E	Load Capacity
Item No.	Price Each	Item No.	Price Each						
RSL-10	8.71	RSL-20	8.71	10-32	3/8	17/32	3/4	7/64	700
RSL-11	7.51	RSL-21	7.51	1/4-20	1/2	45/64	1	5/32	1,100
RSL-12	7.79	RSL-22	7.34	3/8-16	5/8	7/8	1 1/4	3/16	3,750
RSL-13	7.02	RSL-23	7.02	1/2-13	3/4	1 1/8	1 7/8	1/4	5,000
RSL-14	8.49	RSL-24	8.49	5/8-11	7/8	1 1/4	2 1/2	5/16	6,000
RSL-15	9.94	RSL-25	10.09	3/4-10	1 1/16	1 1/2	3	1/2	7,200
RSL-16	14.74	RSL-26	36.62	1-8	1 3/8	1 7/8	4	1 1/32	22,000

Socket Type



Steel - Gold Chromate




Item No.	A	Min. Thd. Depth	B	C	D	E	Load Capacity	Price Each
<b>Steel - Gold Chromate, with Delrin Pad - Inch</b>								
LD-5	10-32	.17	3/8	53/100	3/4	1/8	150	6.33
LD-6	1/4-20	.31	1/2	7/10	1	3/20	200	8.29
LD-0	3/8-16	.38	5/8	7/8	1 1/4	3/16	300	8.37
LD-1	1/2-13	.44	3/4	1 1/8	1 7/8	1/4	700	10.35
LD-2	5/8-11	.44	7/8	1 1/4	2 1/2	5/16	1,200	20.28
LD-3	3/4-10	.62	1 1/16	1 1/2	3	1/2	1,800	27.64
LD-4	1-8	.81	1 3/8	1 7/8	4	1 1/32	2,400	37.18
<b>Steel - Gold Chromate, with Delrin Pad - Metric</b>								
MLP-120	M16 x 2.00	11.2	24	32	64	8	544	10.51
MLP-125	M20 x 2.50	15.7	30	38	76	13	818	22.25

Stud Type



Steel - Gold Chromate



See pages 347-350 for threaded tube insert glides.

Item No.	A	B	C	D	E	F	Load Capacity	Price Each
<b>Steel - Gold Chromate, with Delrin Pad - Inch</b>								
TD-00	10-32	3/8	17/32	3/4	7/64	1	150	5.36
TD-0	1/4-20	1/2	45/64	1	5/32	1 1/4	200	7.26
TD-1	3/8-16	5/8	7/8	1 1/4	3/16	2	300	10.93
TD-15	1/4-20	1/2	45/64	1	5/32	2 1/2	200	10.25
TD-20	3/8-16	5/8	7/8	1 1/4	3/16	4	300	12.00
TD-2	1/2-13	3/4	1 1/8	1 7/8	1/4	2	700	14.93
TD-25	1/2-13	3/4	1 1/8	1 7/8	1/4	4	700	15.75
TD-3	5/8-11	7/8	1 1/4	2 1/2	5/16	2	1,200	20.87
TD-4	3/4-10	1 1/16	1 1/2	3	1/2	2	1,800	30.29
TD-35	3/4-10	1 1/16	1 1/2	3	1/2	4	1,800	30.64
TD-5	1-8	1 3/8	1 7/8	4	1 1/32	4 1/4	2,400	41.45
TD-40	1-8	1 3/8	1 7/8	4	1 1/32	8	2,400	45.56
<b>Steel - Gold Chromate, with Delrin Pad - Metric</b>								
MLP-90	M10 x 1.50	17	25	32	8	51	136	4.02
MLP-95	M12 x 1.75	19	33	48	9	51	318	6.10

**MACHINERY MOUNTS**


Buy One or Buy Bulk & **SAVE!**

**Stainless and Zinc Anti-Vibration Mounts**



- Corrosive resistant design
- Designed with high grade materials, nitrile rubber, stainless steel
- Available in a wide variety of sizes
- All models available in zinc plated steel or #2 stainless steel

Stainless for damp or corrosive areas. Durable thread connection to equipment. Swivel movement ±7 degrees for stable support on inclined floors. Neoprene rubber ensures equipment does not move.

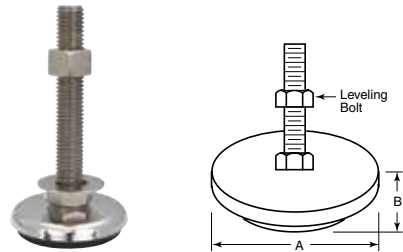


See pages 347-350 for threaded tube insert glides.

Stainless		Zinc		Bolt Size	Bolt Length	A Dia.	B Base Ht.	Load Capacity (Lbs.)
Item No.	Price Each	Item No.	Price Each					
RY-605	52.63	RY-805	31.61	1/2-13	4	2.64	.94	250
RY-620	54.00	RY-820	32.86	1/2-13	4	2.64	.94	500
SX-625	55.34	SX-825	31.64	1/2-13	6	2.64	.94	500
RY-630	55.38	RY-830	34.18	3/8-11	4	2.64	1.00	500
—	—	SX-835	34.22	3/8-11	6	2.64	1.00	500
RY-640	56.68	RY-840	39.52	1/2-13	4	3.86	1.38	1,000
SX-645	57.88	SX-845	39.44	1/2-13	6	3.86	1.38	1,000
RY-650	61.96	RY-850	42.13	3/8-11	4	3.86	1.44	1,000
—	—	SX-855	43.48	3/8-11	6	3.86	1.44	1,000

Stainless		Zinc		Bolt Size	Bolt Length	A Dia.	B Base Ht.	Load Capacity (Lbs.)
Item No.	Price Each	Item No.	Price Each					
RY-660	72.37	RY-860	46.01	3/4-10	4	3.86	1.56	1,000
—	—	SX-865	46.09	3/4-10	6	3.86	1.56	1,000
RY-670	57.97	RY-870	40.82	1/2-13	4	3.86	1.38	2,000
SX-675	60.64	SX-875	40.75	1/2-13	6	3.86	1.38	2,000
SX-680	63.26	SX-880	43.44	3/8-11	4	3.86	1.44	2,000
RY-685	69.79	RY-885	46.09	3/8-11	6	3.86	1.44	2,000
SX-690	72.37	SX-890	46.16	3/4-10	4	3.86	1.56	2,000
RY-695	79.09	RY-895	50.04	3/4-10	6	3.86	1.56	2,000

**Anti-Vibration leveling Pads  
Inch and Metric Threads**




These anti-vibration leveling pads are the only swivel leveling devices specifically designed to provide low frequency vibration isolation, leveling and shock attenuation for electronics and machinery. These pads have a 15 degree swivel off center to adjust to uneven surfaces. They feature over 1/2" of black neoprene permanently bonded to the base. The steel parts are zinc plated with black chromate finish. The neoprene has an operating temperature range of -20 to +180 degree Fahrenheit. Metric dimensions are in millimeters.

See pages 347-350 for threaded tube insert glides.

Item No.	Load Rating Lbs.	A	B	C	Price Each
<b>Inch</b>					
AX-5	100-400	1/2-13	2	3/4	23.54
AX-10	100-400	1/2-13	4	3/4	25.30
AX-15	200-800	1/2-13	2	3/4	28.24
AX-20	200-800	1/2-13	4	3/4	31.08
AX-25	400-1,200	1/2-13	2	3/4	32.94
AX-30	400-1,200	1/2-13	4	3/4	36.25
<b>Metric</b>					
AX-35	100-400	M12 x 1.75	51	19	27.07
AX-40	100-400	M12 x 1.75	84	19	29.78
AX-45	200-800	M12 x 1.75	51	19	32.48
AX-50	200-800	M12 x 1.75	84	19	34.89
AX-55	400-1,200	M12 x 1.75	51	19	37.02

**Machine Leveling Mounts  
Elastomer Base - OSHA Yellow Steel Cover**

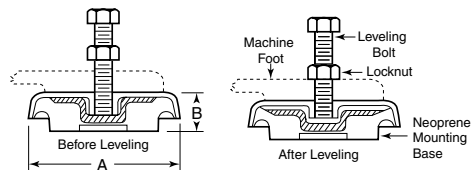

See pages 347-350 for threaded tube insert glides.

Item No.	A	B	Bolt Size/Lgth.	Load Rate Per Mount Lbs.	Price Each
LM-00	2	1	1/4-28 x 1 1/4	30/100	22.72
LM-0	3 3/8	1 1/2	3/8-24 x 3	100/300	21.03
LM-1	4 3/4	1 1/2	1/2-13 x 5	300/1,000	26.19
LM-8	4 3/4	1 1/2	1/2-13 x 8	300/1,000	31.01
LM-10	6 5/16	1 5/8	3/8-16 x 5	1,000/4,200	109.45
LM-2	6 5/16	1 5/8	1/2-13 x 5	1,000/4,200	41.09
LM-3	6 5/16	1 5/8	3/4-10 x 5	1,000/4,200	36.62
LM-11	6 5/16	1 5/8	3/4-10 x 8	1,000/4,200	43.52
LM-12	6 5/16	1 5/8	3/4-10 x 10	1,000/4,200	56.03
LM-25	7 1/4	1 5/8	1/2-13 x 5	4,000/10,000	219.73
LM-30	7 1/4	1 5/8	3/4-10 x 5	4,000/10,000	85.99
LM-35	7 1/4	1 5/8	3/4-10 x 8	4,000/10,000	85.99
LM-4	9	2 1/2	3/4-10 x 5	4,000/13,000	156.48
LM-14	9	2 1/2	1-14 x 5	4,000/13,000	156.48
LM-5	9	2 1/2	1-14 x 8	4,000/13,000	161.52
LM-15*	9	2 1/4	1-14 x 5	4,000/13,000	195.60
LM-6	9	2 1/4	1-14 x 8	4,000/13,000	95.36

Protects general metalworking and process equipment (punch presses, milling machines, lathes, mixers, injection molding machines, grinders, etc.) from shock and vibration, and simplifies their installation. 2 1/2" of neoprene provides controlled deflections under load; high isolation efficiency for vibration and shock forces; reduction of transmitted sound. Mounts are adjustable up to 1/2" above loaded height by a few turns of the leveling bolt. Tightening the check nut then maintains the exact height you need. Corrosion-resistant outer housing provides high strength; neoprene elastomer resists oil, grease, ozone, and caustics; zinc plated hardware resists rust. Hex head bolt and locknut furnished with mounts. All height dimensions indicate free height of mount under no load.

\*Specially designed and built for use on machines with heavy horizontal forces.



Heavy Duty Industrial Machine Mounts



**Benefits:**

- High strength machined components
- Rapid installation and leveling
- 80% vibration reduction
- Vertical and horizontal isolation

**Application:**

- Milling machines
- Presses
- Injection molding
- Packaging machines


Heavy duty industrial machine mount designed with high strength construction for reduction of both shock and vibration. Prevents vibration from affecting other machines and prevents mounted equipment from outside vibration effects. Provides precision leveling with large support plate and meets OSHA standards by preventing "walking".

Item No.	Non-Impact Machinery	Load Ranges Per Mount (lbs.)		
		Presses	Max. Strokes	Per Minute
SX-1	1,100	500	400	300
SX-2	2,200	1,000	800	600
SX-3A	4,400	2,400	1,900	1,400
SX-3	8,800	4,000	3,200	2,400
SX-4	12,000	5,500	4,400	3,300

See pages 347-350 for threaded tube insert glides.

Item No.	Load Lbs.	Base Dia.	Plate Dia.	Height	Adjust.	Bolt Type	Price Each
SX-1	1,100	3.15	2.36	1.5	.50	M12-1.25	28.62
SX-2	2,200	4.75	3.15	1.80	.55	M16-1.5	50.32
SX-3A	4,400	6.25	3.94	2.10	.60	M20-1.5	58.24
SX-3	8,800	6.25	3.94	2.13	.60	M20-1.5	70.08
SX-4	12,000	7.87	3.94	2.2	.60	M20-1.5	120.83

**General Purpose**

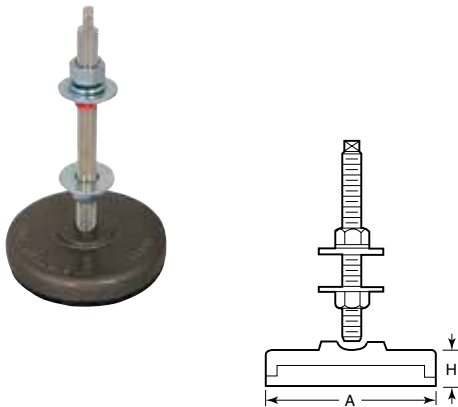

These leveling mounts are designed for installation of industrial machinery where the ratio of shear loads to vertical loads is less than or equal to 1:5. Base is unthreaded. The stud rests on the pad and is not threaded in or fastened to the pad. Self-aligning feature compensates for uneven floors without sacrificing stability. Scientifically designed diamond suction cells of the neoprene insert firmly anchor the machine to the floor. Recommended for a wide range of industrial machinery and equipment where simple precise leveling is required. One inch level adjustment.

See pages 347-350 for threaded tube insert glides.

Item No.	Maximum Load in Lbs.		Leveling Bolt Size	A	H	Price Each
	Non-Impact Machinery	Impact Machinery				
VP-1	500	350	1/2-13 x 6	4	1	38.91
VP-2	1,000	700	1/2-13 x 6	4	1	41.20
VP-3	2,000	1,400	5/8-11 x 8	4	1	50.35
VP-4	2,000	1,400	3/4-16 x 6	7	1 1/4	103.00
VP-5	4,000	2,800	3/4-16 x 6	7	1 1/4	98.47
VP-8	12,000	8,500	1-14 x 8	7	1 1/4	129.10


**Compression Shear Leveling Mounts**

Durable, high-quality mount combines effective compression and shear isolation from vibration and shock with the convenience of an internal leveling device. Deep cavity design allows excellent vibration and shock control in both the vertical and horizontal direction. Heavy-duty ductile iron cover and chemically resistant neoprene insert. Internal leveling device easily levels your machine up to 1/2 inch. Specially designed recess on top of cover houses a rubber washer allowing superior contact between the machine and mount. Concentric rings on base of neoprene insert prevents walking or creeping. Ideal for lathes, milling machines, punch presses, printing machines, shears, brakes, injection molding machines, grinders, etc. Includes all necessary hardware.

See pages 347-350 for threaded tube insert glides.

Item No.	Maximum Load in Lbs.		Leveling Bolt Size	A	H	Price Each
	Non-Impact Machinery	Impact Machinery				
VP-11	1,500	1,000	1/2-13 x 6	3.5	1 1/2	77.82
VP-12	4,500	3,000	5/8-11 x 8	5.5	2 1/4	148.80


Note: Dimension H has no load

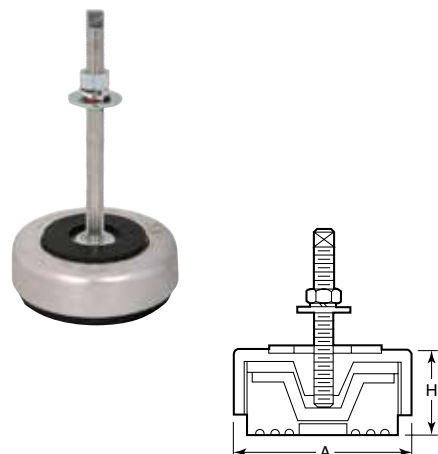

**MACHINERY MOUNTS**

**Buy One or Buy Bulk & SAVE!**

**Pivotal Levelers**

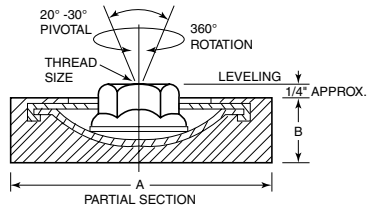


Made of tough bonded neoprene, these patented pivotal levelers keep equipment level and dampen an average of 85% of noise and vibration. The mounting nut, which holds the stud, is molded in the pad in a steel bracket and rotates freely permitting 1/4" or more of leveling. These levelers are available with just the mounting hex nut (allowing you to make a custom stud) or with a stud epoxied in the mounting nut with one hex nut.

See pages 347-350 for threaded tube insert glides.

Item No.	Stud		w/o Stud		Max. Load Lbs.	Type	A	B	Stud Thread
	Price Each	Stud Length	Item No.	Price Each					
TPL-510-A	29.25	4 13/16	—	—	350	Square	3	5/8	1/2-13
TPL-530-A	26.26	4 13/16	TPL-530	16.75	500	Round	3	3/4	1/2-13
TPL-540-A	29.23	4 13/16	TPL-540	18.41	1,000	Round	3	3/4	1/2-13
TPL-535-A	35.45	4 1/2	TPL-535	48.55	3,700	Round	5	1 1/2	3/4-10
TPL-545-A	50.50	4 1/2	TPL-545	48.55	8,000	Round	5	1 1/2	3/4-10

**Cushioned Machine Leveling Mounts**

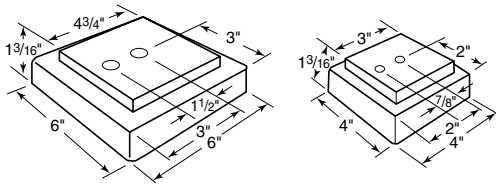


Reduces noise and vibration on heavy machinery, compressors and presses. High strength aluminum alloy mounting plate is imbedded in each pad with two tapped mounting holes for installation on all types of machines. The elastomer compound used in these pads is highly resistant to oil and chemicals. Included with each pad is a 1/2" thread cold forged 2 1/2" long bolt. Thousands of tiny suction pockets on the bottom prevent machine from walking or slipping out of position.

See pages 347-350 for threaded tube insert glides.

Item No.	Size	Load Range Lbs.	Durometer	Price Each
CO-1	4" x 4"	4,000	60	62.05
CO-2	4" x 4"	4,000 - 10,000	80	62.05
CO-3	6" x 6"	4,000	60	73.23
CO-4	6" x 6"	4,000 - 10,000	80	73.23


**Light Duty Wedge Mounts**



Used for leveling all types of production machines. Made of cast iron with non-skid pads on top and bottom. Excellent isolation and dampening properties. Free standing, compact, low construction height. Fine adjustments under full load. Pretensioned wedges for transverse stability and self-locking wedges for longitudinal stability.

Item No.	Max. Load Lbs.	A	B	Mid-Height C	Leveling Range	Price Each
AWM-2	2,000	6	3	2 5/8	+/- 3/16	97.28
AWM-3	3,500	8	3 3/4	2 1/2	+/- 1/4	126.60
AWM-4	6,500	8	8	2 1/2	+/- 1/4	245.80

**Heavy Duty Wedge Mounts**




Designed for installation and precise leveling of heavy industrial machinery. Three machined wedges are mounted and held together by a horizontal adjusting bolt. A lock screw secures the mount in the leveled position. Keys in the sliding surfaces of the wedges ensure rigidity within the mount construction. A special opening allows for bolting of the machine to the floor. Maximum leveling is 1/4 inch. If more height is required a shim plate may be used.

Item No.	Max. Load Lbs.	A	B	H	Price Each
VP-50	15,000	6	4	1 5/8	167.40
VP-51*	9,000	6	4	2	175.10

\*Neoprene top and bottom for vibration, noise and shock isolation.



**Anchoring Hygienic Anti-Vibration Mounts**

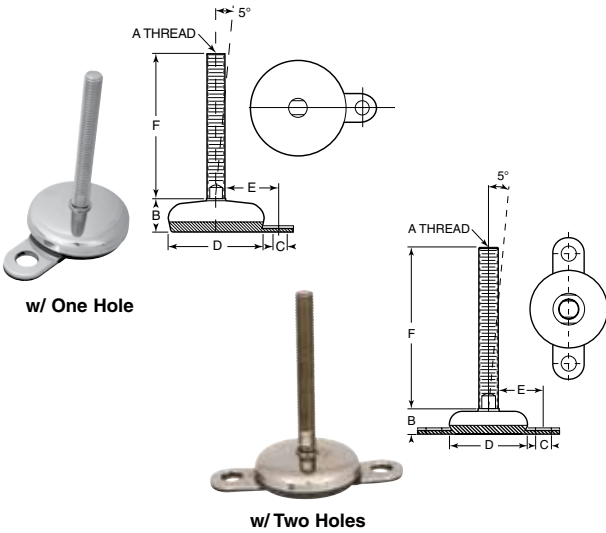


ANSI Type 304 stainless steel provides high corrosion resistance. Rounded polished base for fluid run-off during wash down applications. 5 degrees swivel for good floor contact. Rubber base meets FDA 177-2600. Operating temperatures are -20 to 100 degree Celsius. Available with one or two anchoring holes.

1-Hole		2-Holes		A	B	C	D	E	F	Load Capacity
Item No.	Price Each	Item No.	Price Each							
SX-75	37.08	SX-83	43.34	1/2-13	.87	.63	2.95	2.05	4	1,770
SX-76	37.77	SX-84	50.62	1/2-13	.87	.63	2.95	2.05	6	1,770
SX-77	40.83	SX-85	47.06	5/8-11	.87	.63	2.95	2.05	6	1,770
SX-78	42.64	SX-86	48.91	5/8-11	.87	.63	2.95	2.05	8	1,770
SX-79	45.95	SX-87	52.21	3/4-10	.87	.63	2.95	2.05	6	1,770
SX-80	48.62	SX-88	54.89	3/4-10	.87	.63	2.95	2.05	8	1,770
SX-81	56.69	SX-89	56.61	7/8-9	.87	.63	2.95	2.05	6	1,770
SX-82	60.20	SX-90	67.39	7/8-9	.87	.63	2.95	2.05	8	1,770
SX-92	54.71	—	—	1/2-13	1.26	.63	3.94	2.64	6	2,220
SX-91	54.71	—	—	1/2-13	1.26	.63	3.94	2.64	4	2,220
SX-93	58.46	—	—	5/8-11	1.26	.63	3.94	2.64	6	2,220
SX-94	60.26	—	—	5/8-11	1.26	.63	3.94	2.64	8	2,220
SX-95	63.59	—	—	3/4-10	1.26	.63	3.94	2.64	6	2,220
SX-96	66.28	—	—	3/4-10	1.26	.63	3.94	2.64	8	2,220
SX-97	76.98	—	—	7/8-9	1.26	.63	3.94	2.64	6	2,220
SX-98	80.47	—	—	7/8-9	1.26	.63	3.94	2.64	8	2,220

**Low Profile Anchoring Leveler**



Solid stainless steel construction for heavy loads. Rounded profile makes leveler easy to clean. ANSI Type 304 stainless steel for high chemical resistance. Withstands temperatures of -20 to 100 degrees Celsius. Wrench flats in bolt provide full use of threaded bolt. Available with either 1 degree or 12 degrees of swivel.




w/ Lag Holes

**Overall Hygienic**



Overall hygienic stainless steel mounts meet all USDA requirements for food processing equipment. Rubber contains no voids and is vulcanized to the housing for a completely hygienic seal. ANSI Type 304 stainless steel provides high corrosion resistance. Full range of motion up to 10 degrees. Pivot provides secure footing and complete vibration control.



1 degree		12 degrees		A	B	C	D	E	F	Load Capacity
Item No.	Price Each	Item No.	Price Each							
SX-132	75.14	SX-148	83.16	1/2-13	.5	.47	3.54	1.26	4	13,300
—	—	SX-149	78.92	1/2-13	.5	.47	3.54	1.26	6	13,300
SX-134	69.16	SX-150	92.67	5/8-11	.5	.47	3.54	1.26	6	13,300
SX-135	44.44	SX-151	95.28	5/8-11	.5	.47	3.54	1.26	8	13,300
SX-136	76.24	SX-152	86.99	3/4-10	.5	.47	3.54	1.26	6	13,300
SX-137	69.68	SX-153	90.37	3/4-10	.5	.47	3.54	1.26	8	13,300
SX-138	80.99	SX-154	104.77	7/8-9	.5	.47	3.54	1.26	6	13,300
SX-139	74.21	SX-155	109.08	7/8-9	.5	.47	3.54	1.26	8	13,300
SX-140	64.24	SX-156	97.01	1/2-13	.5	.47	4.33	1.73	4	13,300
SX-141	79.94	SX-157	90.37	1/2-13	.5	.47	4.33	1.73	6	13,300
SX-142	85.33	SX-158	94.85	5/8-11	.5	.47	4.33	1.73	6	13,300
SX-143	87.73	SX-159	111.69	5/8-11	.5	.47	4.33	1.73	8	13,300
SX-144	80.39	SX-160	101.24	3/4-10	.5	.47	4.33	1.73	6	13,300
SX-145	78.28	SX-161	77.60	3/4-10	.5	.47	4.33	1.73	8	13,300
SX-146	84.52	SX-162	100.74	7/8-9	.5	.47	4.33	1.73	6	13,300
—	—	SX-163	109.12	7/8-9	.5	.47	4.33	1.73	8	13,300

Item No.	A	C	D	F	Load Capacity	Price Each
SX-35	1/2-13	1.3	2.36	4	1,100	24.03
SX-36	1/2-13	1.3	2.36	6	1,100	25.22
SX-37	5/8-11	1.3	2.36	6	1,100	28.97
SX-38	5/8-11	1.3	2.36	8	1,100	29.45
SX-39	3/4-10	1.3	2.36	6	1,100	29.91
SX-40	3/4-10	1.3	2.36	8	1,100	36.80
SX-41	7/8-9	1.3	2.36	6	1,100	43.05
SX-42	7/8-9	1.3	2.36	8	1,100	46.56
SX-43	1/2-13	1.22	3.15	4	2,200	36.62
SX-44	1/2-13	1.22	3.15	6	2,200	37.81
SX-45	5/8-11	1.22	3.15	6	2,200	41.55
SX-46	5/8-11	1.22	3.15	8	2,200	43.39
SX-47	3/4-10	1.22	3.15	6	2,200	46.70
SX-48	3/4-10	1.22	3.15	8	2,200	49.38
SX-49	7/8-9	1.22	3.15	6	2,200	57.55
SX-50	7/8-9	1.22	3.15	8	2,200	61.06
SX-51	1/2-13	1.34	3.94	4	3,300	54.87
SX-52	1/2-13	1.34	3.94	6	3,300	64.47
SX-53	5/8-11	1.34	3.94	6	3,300	59.78
SX-54	5/8-11	1.34	3.94	8	3,300	61.63
SX-55	3/4-10	1.34	3.94	6	3,300	64.94
SX-56	3/4-10	1.34	3.94	8	3,300	67.62

**CUSTOMER FIRST!**

# WE MAKE IT EASY

We Treat Your Business Like It's Our Business


PLASTIC BASED LEVELERS

Buy One or Buy Bulk & **SAVE!**

Light Duty Glides



Nylon Pad



Elastomer Pad

See pages 347-350 for threaded tube insert glides.

Item No.	Thread	Base	Thread Length	Height	Load Capacity	Price Each
<b>Nylon Pad - Steel</b>						
GL-5	10-24	1.2	1½	2¼	250	1.95
GL-10	¼-20	1.2	1½	2¼	250	2.01
GL-15	⅜-18	1.2	1½	2¼	250	2.05
GL-20	⅜-18	2.03	2	3	250	2.60
GL-25	⅜-16	2.03	2	3	250	2.66
GL-30	⅜-16	2.4	2	3	250	2.87
GL-35	⅜-16	2.4	4	5	250	3.21
GL-40	½-13	2.4	2	3	250	3.14
GL-45	½-13	2.4	4	5	250	3.68
GL-50	½-13	2.8	2	3½	500	4.13
GL-55	½-13	2.8	4	5½	500	4.62
GL-60	⅝-11	2.8	2	3½	500	5.36
GL-65	⅝-11	2.8	4	5½	500	6.08
GL-70	½-13	3.187	4	5½	500	6.06
GL-75	½-13	3.187	6	7½	500	6.57
GL-80	⅝-11	3.187	4	5½	500	7.50
GL-85	⅝-11	3.187	6	7½	500	8.20
<b>Elastomer Pad - Steel</b>						
GL-95	¼-20	1.2	1½	2¼	250	2.74
GL-100	⅜-18	1.2	1½	2¼	250	2.76
GL-105	⅜-18	2.03	2	3	250	3.48
GL-110	⅜-16	2.03	2	3	250	3.54
GL-115	⅜-16	2.4	2	3	250	4.22
GL-120	⅜-16	2.4	4	5	250	4.74
GL-125	½-13	2.4	2	3	250	5.07
GL-130	½-13	2.4	4	5	250	5.56
GL-135	½-13	2.8	2	3½	500	5.80
GL-140	½-13	2.8	4	5½	500	6.15
GL-150	⅝-11	2.8	4	5½	500	7.63
GL-155	½-13	3.187	4	5½	500	8.09
GL-160	½-13	3.187	6	7½	500	8.39
GL-165	⅝-11	3.187	4	5½	500	9.27
GL-170	⅝-11	3.187	6	7½	500	9.99


These industrial glides are an excellent and inexpensive solution for light duty applications such as office furniture, shelving, point of purchase (POP) displays, cabinetry and small machinery. The bases are available in a sturdy nylon base for glide applications or an elastomer base for non-skid applications. Studs and shell available in both clear zinc steel and ANSI Type 303 stainless steel.

Item No.	Thread	Base	Thread Length	Height	Load Capacity	Price Each
<b>Nylon Pad - Stainless Steel</b>						
GL-175	10-24	1.2	1½	2¼	250	4.34
GL-180	¼-20	1.2	1½	2¼	250	4.57
GL-185	⅜-18	1.2	1½	2¼	250	5.24
GL-190	⅜-18	2.03	2	3	250	6.23
GL-195	⅜-16	2.03	2	3	250	7.16
GL-200	⅜-16	2.4	2	3	250	7.83
GL-205	⅜-16	2.4	4	5	250	8.77
GL-210	½-13	2.4	2	3	250	8.99
GL-220	½-13	2.8	2	3½	500	11.44
GL-225	½-13	2.8	4	5½	500	12.10
GL-230	⅝-11	2.8	2	3½	500	13.49
GL-240	½-13	3.187	4	5½	500	15.55
GL-250	⅝-11	3.187	4	5½	500	16.62
GL-255	⅝-11	3.187	6	7½	500	19.08
<b>Elastomer Pad - Stainless Steel</b>						
GL-265	¼-20	1.2	1½	2¼	250	4.96
GL-270	⅜-18	1.2	1½	2¼	250	5.84
GL-275	⅜-18	2.03	2	3	250	7.71
GL-280	⅜-16	2.03	2	3	250	8.61
GL-285	⅜-16	2.4	2	3	250	9.36
GL-290	⅜-16	2.4	4	5	250	9.99
GL-300	½-13	2.4	4	5	250	12.78
GL-305	½-13	2.8	2	3½	500	12.92
GL-310	½-13	2.8	4	5½	500	13.77
GL-320	⅝-11	2.8	4	5½	500	17.30
GL-330	½-13	3.187	6	7½	500	18.58
GL-335	⅝-11	3.187	4	5½	500	18.95
GL-340	⅝-11	3.187	6	7½	500	19.91


Light Duty Glides



Elastomer Pad



Nylon Pad



For light duty leveling applications. Can be used on furniture, light duty machines, tables, cabinets, light weight equipment, etc. Made of steel. Available with elastomer pad for non-skid applications or nylon pad for glide applications.


See pages 347-350 for threaded tube insert glides.

Item No.	Load Rating Lbs.	A	B	C	D	E	F	Price Each
<b>Elastomer Pad</b>								
VE-700	300	¼-20	1.5	1.5	.5	.16	1.22	2.05
VE-705	300	⅜-18	1.5	1.5	.5	.16	1.22	2.08
VE-702	300	⅜-16	2	2.0	.5	.2	1.71	3.46
VE-703	300	½-13	2	2.0	.5	.2	1.71	3.61
<b>Nylon Pad</b>								
VE-704	300	¼-20	1.5	1.38	.5	.16	—	1.69
VE-705	300	⅜-18	1.5	1.38	.5	.16	—	1.71
VE-706	300	⅜-16	2	2.0	.5	.2	—	2.87
VE-707	300	½-13	2	2.0	.5	.2	—	3.02



PLASTIC BASED LEVELERS


4.84" Pad - Max. Load: 4,400 Lbs.  
Steel and Stainless Stem

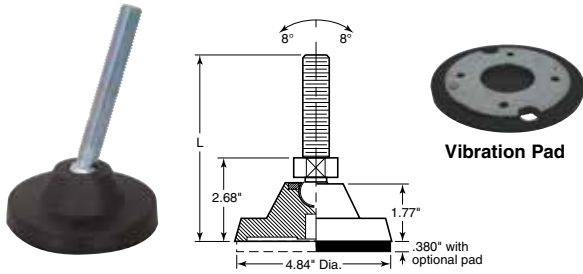

See pages 347-350 for threaded tube insert glides.


Steel		Stainless		Thread	L
Item No.	Price Each	Item No.	Price Each		
RL-1504-P	25.79	RL-1504-S	30.01	3/4-10	5.63
RL-1506-P	28.08	—	—	3/4-10	8.25
Vibration Pad					
RL-150-VP	24.01	Rubber Pad w/Steel Plate for 4.84" Base			

4.84" Pad  
Steel and Stainless Stem

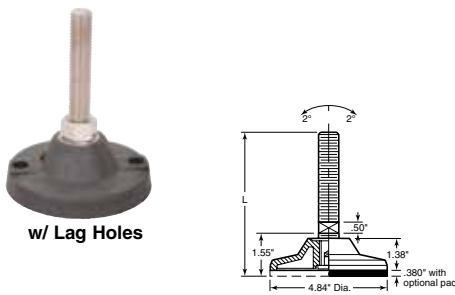


w/ Lag Holes

Heavy Duty

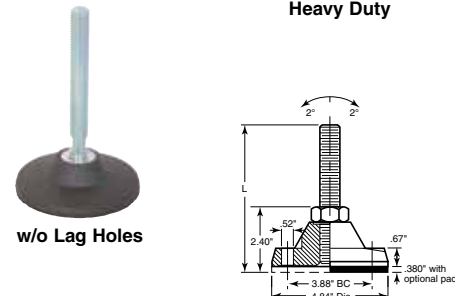

w/o Lag Holes

Extra Heavy Duty




Vibration Pad

See pages 347-350 for threaded tube insert glides.

Steel		Stainless		Thread	L
Item No.	Price Each	Item No.	Price Each		
Heavy Duty w/o Lag Holes - Max. Load: 8,000 Lbs.					
RL-1601-P	26.57	RL-1601-S	32.88	3/4-10	7.50
RL-1602-P	29.53	—	—	1-8	7.48
Extra Heavy Duty w/ Lag Holes - Max. Load: 9,900 Lbs.					
RL-1702-P	30.72	RL-1702-S	38.22	3/4-10	7.48
RL-1703-P	33.69	RL-1703-S	42.55	1-8	7.48
RL-1715-P	41.83	—	—	1-8	10.07
Vibration Pad					
RL-150-VP	24.01	—	—	Rubber Pad w/Steel Base for 4.84" Base	


Loc-A-Lign Series  
4.84" Pad - Max. Load: 9,900 Lbs.  
Steel and Stainless Stem

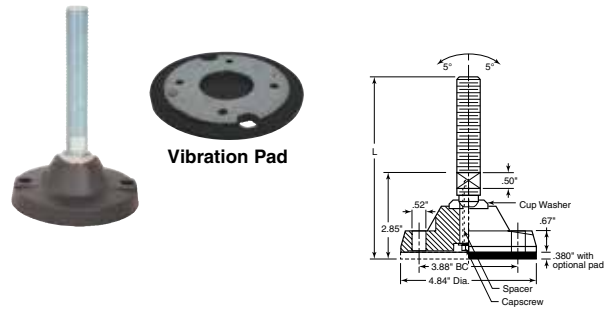

See pages 347-350 for threaded tube insert glides.

Steel		Stainless		Thread	L
Item No.	Price Each	Item No.	Price Each		
RL-2210-P	37.84	—	—	1-8	7.45
RL-2225-P	56.02	RL-2225-S	61.65	1-8	9.95
RL-2240-P	72.35	—	—	1-8	11.95
RL-2250-P	70.59	—	—	1 1/4 - 7	11.95
Vibration Pad					
RL-150-VP	24.01	Rubber Pad w/Steel Plate for 4.84" Base			

4.84" Pad - Max. Load: 9,900 Lbs.  
Steel and Stainless Stem

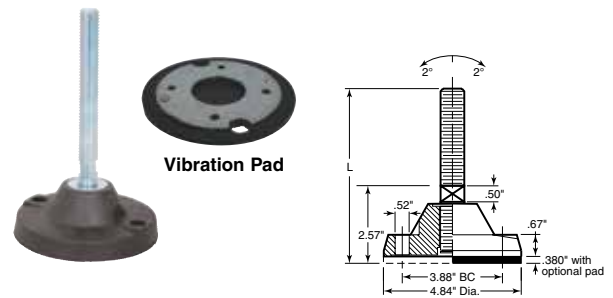


Vibration Pad

See pages 347-350 for threaded tube insert glides.

Steel		Stainless		Thread	L
Item No.	Price Each	Item No.	Price Each		
RL-1720-P	27.74	RL-1720-S	35.04	3/4-10	7.50
RL-1725-P	30.72	RL-1725-S	51.14	1-8	7.50
RL-1735-P	54.75	—	—	1-8	10.09
—	—	RL-1705-S	51.98	1 1/4 - 7	7.50
Vibration Pad					
RL-150-VP	24.01	—	—	Rubber Pad w/Steel Plate for 4.84" Base	

5.50" Pad - Max. Load: 7,200 Lbs.  
Single Lag Hole - Cast Nylathane Base  
Steel Stem

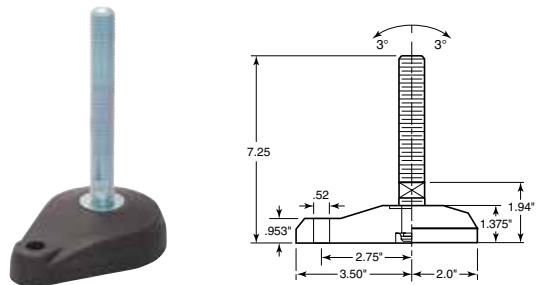


See pages 347-350 for threaded tube insert glides.

Item No.	Thread	Price Each
RL-2110-P	3/4-10	36.24
RL-2115-P	1-8	39.22



**PLASTIC BASED LEVELERS**

**3.85" Pad - Max. Load: 2,600 Lbs.**  
Inch and Metric  
Steel and Stainless Stem

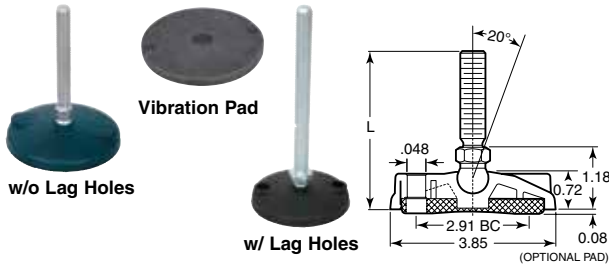

See page 347-350 for threaded tube insert glides.

Steel		Stainless		Thread	L
Item No.	Price Each	Item No.	Price Each		
<b>w/o Lag Holes - Inch</b>					
RL-1402-P	15.74	RL-1402-S	22.43	1/2-13	4.60
RL-1403-P	25.31	—	—	5/8-11	7.60
RL-1404-P	26.65	—	—	3/4-10	7.60
RL-1420-P	32.18	—	—	3/4-10	10.60
<b>w/ Lag Holes - Inch</b>					
—	—	RL-1412-S	22.82	1/2-13	4.60
RL-1413-P	22.39	RL-1413-S	30.80	5/8-11	7.60
RL-1414-P	27.06	RL-1414-S	42.39	3/4-10	7.60
RL-1425-P	32.53	RL-1425-S	60.07	3/4-10	10.60
<b>w/o Lag Holes - Metric</b>					
RL-1405-P	17.89	—	—	M16 x 2.00	118
—	—	RL-1406-S	42.95	M16 x 2.00	198
RL-1407-P	26.65	RL-1407-S	44.77	M20 x 2.50	198
<b>w/ Lag Holes - Metric</b>					
RL-1415-P	22.71	—	—	M16 x 2.00	118
RL-1416-P	24.10	RL-1416-S	45.34	M16 x 2.00	198
—	—	RL-1417-S	44.02	M20 x 2.50	198
<b>Vibration Pad</b>					
SX-140-VP	12.12	—	—	Rubber Pad for 3.85" Base	

**4" Pad - Max. Load: 2,600 Lbs.**  
Stainless Socket  
Internal Threads



Item No.	Thread	Price Each
<b>w/o Lag Holes</b>		
RL-2905-S	1/2-13	18.87
RL-2910-S	5/8-11	20.52
RL-2915-S	3/4-10	26.99
<b>w/Lag Holes</b>		
RL-3105-S	1/2-13	18.87
RL-3115-S	3/4-10	26.99
<b>Vibration Pad</b>		
RL-140-VP	—	10.89

**Loc-A-Lign Series**  
**4.00" Pad - Max. Load: 2,600 Lbs.**  
Steel and Stainless Stem

Steel		Stainless		Thread	L
Item No.	Price Each	Item No.	Price Each		
<b>w/o Lag Holes</b>					
RL-2050-P	29.66	RL-2050-S	35.40	5/8-11	7.69
RL-2055-P	32.48	RL-2055-S	38.91	3/4-10	7.69
<b>w/ Lag Holes</b>					
RL-2075-P	32.48	RL-2075-S	38.91	3/4-10	7.69
RL-2080-P	37.69	RL-2080-S	46.16	3/4-10	10.69
<b>Vibration Pad</b>					
RL-140-VP	10.89	—	—	Rubber Pad for 4" Base	

**AFM & AFMP Series**  
Swivel/Tilting Adjustable Machinery Feet



**AFMP Series**  
Optional Non-Slip Pad

Item No.			
Plain Base	Bolt-Down Base	Base Dia In	Price Each
AFMP040A	—	1.57	0.80
AFMP050A	—	1.97	1.30
AFMP060A	AFMP060B	2.36	1.70
AFMP080A	AFMP080B	3.15	2.90
AFMP100A	AFMP100B	3.94	4.40
AFMP120A	AFMP120B	4.72	6.70


Specifications:

- Material: Black Nylon Base with Zinc Plated Steel rod

Features:

- Ideal for mounting machines or conveyers
- High Load bearing of 2000lbs (900kg) per foot
- Tilting & swiveling design (20° Max)

Item No.					
Plain Base	Bolt-Down Base	Thread	Stud Length In	Base Dia In	Price Each
AFM1100A	—	5/16-18	2.5	1.57	8.50
AFM1200A	—	5/16-18	2.5	1.97	8.90
—	AFM1300B	5/16-18	2.5	2.36	9.50
AFM1400A	—	5/16-18	3.5	1.57	9.00
AFM1500A	—	5/16-18	3.5	1.97	9.40
—	AFM1600B	5/16-18	3.5	2.36	10.00
AFM2050A	—	3/8-16	3	1.97	9.20
—	AFM2100B	3/8-16	3	2.36	9.80
AFM2150A	—	3/8-16	3	3.15	12.00
AFM2200A	—	3/8-16	4	1.97	10.50
—	AFM2250B	3/8-16	4	2.36	11.10
AFM2300A	—	3/8-16	4	3.15	13.30
AFM3100A	—	1/2-13	3	1.97	10.00
—	AFM3150B	1/2-13	3	2.36	10.60
AFM3200A	AFM3200B	1/2-13	3	3.15	12.80
AFM3300A	—	1/2-13	4	1.97	10.50
AFM3400A	AFM3400B	1/2-13	4	3.15	13.30
—	AFM3450B	1/2-13	4	3.94	17.50
AFM3500A	—	1/2-13	5	2.36	12.30
AFM3600A	AFM3600B	1/2-13	5	3.15	14.50
—	AFM3700B	1/2-13	5	3.94	18.70
AFM4100A	—	5/8-11	3	1.97	12.40
—	AFM4150B	5/8-11	3	2.36	13.00
AFM4200A	—	5/8-11	3	3.15	15.20
AFM4250A	—	5/8-11	4	1.97	13.70
AFM4300A	AFM4300B	5/8-11	4	3.15	16.50
—	AFM4400B	5/8-11	4	3.94	20.70
AFM4450A	—	5/8-11	6	3.15	20.50
AFM4500A	AFM4500B	5/8-11	6	3.94	24.70
AFM4600A	—	5/8-11	6	4.72	27.00
AFM4650A	—	5/8-11	8	3.15	25.20
AFM4700A	—	5/8-11	8	3.94	29.40
AFM4800A	AFM4800B	5/8-11	8	4.72	31.60
AFM5400A	—	3/4-10	6	3.15	29.30
AFM5450A	—	3/4-10	6	3.94	33.50
AFM5500A	AFM5500B	3/4-10	6	4.72	35.80
AFM5600A	—	3/4-10	8	3.15	38.50
AFM5650A	—	3/4-10	8	3.94	42.70
AFM5700A	AFM5700B	3/4-10	8	4.72	44.90

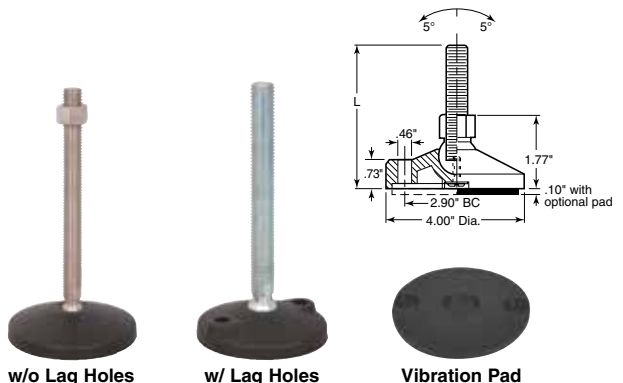

PLASTIC BASED LEVELERS


3.10" Pad - Max. Load: 2,000 Lbs.  
Inch and Metric  
Steel and Stainless Stem



w/o Lag Holes



w/ Lag Holes



Vibration Pad


See page 347-350 for threaded tube insert glides.

Steel		Stainless		Thread	L
Item No.	Price Each	Item No.	Price Each		
<b>w/o Lag Holes - Inch</b>					
RL-1301-P	13.58	RL-1301-S	18.93	3/8-16	3.60
RL-1302-P	14.80	RL-1302-S	21.61	1/2-13	3.60
RL-1304-P	16.69	RL-1304-S	24.70	1/2-13	6.10
RL-1305-P	18.59	RL-1305-S	32.85	3/8-11	6.10
<b>w/ Lag Holes - Inch</b>					
RL-1309-P	14.37	RL-1309-S	18.44	3/8-16	3.60
RL-1310-P	14.80	RL-1310-S	23.67	1/2-13	3.60
RL-1311-P	16.69	RL-1311-S	24.70	1/2-13	6.10
RL-1312-P	18.59	RL-1312-S	32.85	3/8-11	6.10
<b>w/ Lag Holes - Mixed</b>					
RL-1313-P	19.43	RL-1313-S	23.86	M16 x 2.00	94
RL-1314-P	23.83	RL-1314-S	40.34	M16 x 2.00	153
<b>Vibration Pad</b>					
SX-130-VP	6.33	—	—	Rubber Pad for 3.10" Base	

1.92" Pad - Max. Load: 700 Lbs.  
Inch and Metric  
Steel and Stainless Stem



Vibration Pad



See page 347-350 for threaded tube insert glides.


Steel		Stainless		Thread	L
Item No.	Price Each	Item No.	Price Each		
<b>Inch</b>					
RL-3205-P	11.60	—	—	5/16-18	2.60
RL-3215-P	12.27	—	—	3/8-16	2.60
RL-3220-P	13.25	RL-3220-S	13.62	1/2-13	2.60
RL-3210-P	12.76	RL-3210-S	16.53	5/16-18	3.60
RL-1103-P	13.46	RL-1103-S	14.70	3/8-16	3.60
RL-1104-P	14.82	RL-1104-S	22.70	1/2-13	3.60
RL-3230-P	15.57	—	—	3/8-11	3.60
RL-1105-P	16.76	RL-1105-S	23.33	1/2-13	5.85
RL-1106-P	17.40	RL-1106-S	22.00	3/8-11	5.85
<b>Metric</b>					
RL-3235-P	14.40	—	—	M8 x 1.25	68
RL-3245-P	15.24	RL-3245-S	18.98	M10 x 1.50	68
RL-3250-P	14.03	RL-3250-S	17.70	M10 x 1.50	94
—	—	RL-3260-S	18.52	M12 x 1.75	94
RL-3265-P	20.76	RL-3265-S	30.91	M12 x 1.75	153
—	—	RL-1108-S	24.93	M16 x 2.00	153
<b>Vibration Pad</b>					
SX-110-VP	2.62	—	—	Rubber Pad for 1.92" Base	

Thermoplastic Leveling Pads

Inch



Vibration Pad



These leveling pads are an economical choice for a wide range of applications. The base is made from reinforced thermoplastic. Threaded stem is made of treated steel. Optional non-skid rubber pads available separately. Metric dimensions are in millimeters.



See page 347-350 for threaded tube insert glides.

Item No.	A	C	D	F	Max. Static Load Lbs.	Price Each
RST-500	5/16-18	.51	1.26	1.50	1,763	1.13
RST-501	3/8-16	.51	1.26	1.75	1,763	1.31
RST-502	5/16-18	.51	1.57	1.50	1,763	1.19
RST-503	3/8-16	.51	1.57	1.75	1,763	1.35
<b>Vibration Pads</b>						
RST-504	—	—	—	—	Rubber Pad for 1.26" Base	0.95
RST-505	—	—	—	—	Rubber Pad for 1.57" Base	1.11

1.54" Pad - Max. Load: 700 Lbs.

Inch and Metric

Steel and Stainless Stem




Vibration Pad



Stud



w/o Stud




See page 347-350 for threaded tube insert glides.

Steel		Stainless		Thread	L
Item No.	Price Each	Item No.	Price Each		
<b>Inch</b>					
RL-2510-P	10.42	RL-2510-S	13.24	5/16-18	2.60
—	—	RL-2515-S	15.73	5/16-18	3.60
RL-2520-P	11.06	RL-2520-S	16.14	3/8-16	2.60
RL-2525-P	13.23	RL-2525-S	17.19	3/8-16	3.60
RL-2530-P	9.01	—	—	1/2-13	2.60
RL-2535-P	14.57	—	—	1/2-13	3.60
—	—	RL-2540-S	18.04	3/8-11	2.60
RL-2545-P	15.75	—	—	3/8-11	3.60
<b>Metric</b>					
RL-2550-P	13.19	RL-2550-S	15.97	M8 x 1.25	68
RL-2555-P	13.90	—	—	M8 x 1.25	94
RL-2565-P	13.79	—	—	M10 x 1.50	94
—	—	RL-2575-S	18.25	M12 x 1.75	94
<b>Vibration Pad</b>					
SX-2595-VP	2.69	—	—	Rubber Pad for 1.54" Base	

Mounting Feet  
Bonded Neoprene



w/o Stud



These mounting feet let you isolate all types of machinery and equipment from vibration and floor motion. Made of neoprene bonded to a steel insert. These mounting feet are available with just the steel insert (allowing you to make a custom stud) or with a stud epoxied in the insert with one hex nut.

Item No.	Price Each	Item No.	Price Each	Load Range Lbs.	Load Deflection	Stud Thread	Stud Length
TMF-553-A	15.57	TMF-553	7.70	6-35	.05-.25	3/8-16	2 1/2
TMF-555-A	15.57	TMF-555	7.70	20-65	.05-.25	3/8-16	2 1/2
TMF-557-A	15.57	TMF-557	7.70	50-130	.05-.25	3/8-16	2 1/2
TMF-601-A	19.01	TMF-601	10.17	10-40	.08-.20	1/2-13	2 1/2
TMF-602-A	19.01	TMF-602	10.17	30-80	.08-.20	1/2-13	2 1/2
TMF-603-A	19.01	TMF-603	10.17	70-180	.08-.20	1/2-13	2 1/2
TMF-608-A	19.01	TMF-608	10.17	60-300	.05-.20	1/2-13	2 1/2
TMF-609-A	19.01	TMF-609	10.17	150-600	.05-.20	1/2-13	2 1/2


PLASTIC BASED LEVELERS

Buy One or Buy Bulk & SAVE!

Thermoplastic Leveling Pads  
Metric



Vibration Pad



Rubber Pad

See page 347-350 for threaded tube insert glides.

Item No.	A	C	D	F	G	Max. Static Load Newtons	Price Each
RST-506	M8 x 1.25	22	32	45	3	10,000	4.52
RST-507	M8 x 1.25	22	32	70	3	10,000	5.17
RST-508	M10 x 1.50	22	32	45	3	10,000	3.63
RST-510	M8 x 1.25	22	40	45	3	10,000	3.72
RST-511	M8 x 1.25	22	40	70	3	10,000	4.26
RST-513	M8 x 1.50	22	40	70	3	10,000	4.72
RST-514	M8 x 1.25	27	50	45	2	10,000	3.75
RST-515	M8 x 1.25	27	50	70	2	10,000	4.26
RST-516	M10 x 1.50	27	50	45	2	10,000	3.84
RST-517	M10 x 1.50	27	50	70	2	10,000	4.86
RST-518	M12 x 1.75	27	50	45	2	10,000	4.35
RST-520	M8 x 1.25	27	80	45	2	10,000	4.85
RST-522	M10 x 1.50	27	80	45	2	10,000	4.95
RST-525	M12 x 1.75	27	80	70	2	10,000	6.77
RST-526	M14 x 2.00	27	80	70	2	10,000	7.61
RST-528	M16 x 2.00	27	80	70	2	10,000	10.28
RST-527	M14 x 2.00	27	80	120	2	10,000	11.16
RST-529	M16 x 2.00	27	80	120	2	10,000	11.79
RST-530	M20 x 2.50	27	80	100	2	10,000	18.08
<b>Vibration Pads</b>							
RST-531	Rubber Pad for 50mm Base						1.96
RST-532	Rubber Pad for 80mm Base						3.60

AFMM Series  
Threaded Leveler  
Metric



Plain Base


Plain Base

Item No.	Base Dia. (mm)	Stud Length (mm)	Thread	Price Each
468564	40	25	M8	2.01
468565	40	40	M8	2.13
468566	40	80	M8	2.38
468567	50	40	M8	2.39
468568	50	60	M8	2.52
468569	50	80	M8	2.65
468570	50	45	M10	2.64
468571	50	70	M10	2.80
468572	50	90	M10	3.02
468573	60	45	M10	2.89
468574	60	70	M10	3.09
468575	60	125	M10	3.99
468576	60	66	M12	3.66
468577	60	80	M12	3.73
468578	60	100	M12	3.99
468579	60	125	M12	4.82
468580	60	150	M12	5.08
468581	80	66	M12	4.31
468582	80	100	M12	4.69
468583	80	125	M12	5.53
468584	80	150	M12	5.72
468585	80	66	M16	6.04
468586	80	100	M16	6.81
468587	80	150	M16	8.10
468588	100	66	M16	7.07
468589	100	100	M16	7.84
468590	100	125	M16	8.61
468591	100	150	M16	9.26
468592	100	200	M16	11.57
468593	120	150	M16	10.16
468594	120	200	M16	12.73
468595	120	125	M20	12.34
468596	120	150	M20	13.89
468597	120	200	M20	17.36
468598	120	200	M24	20.44
468599	120	250	M24	22.76

Thermoplastic Leveling Pads  
Base with Lag Holes  
Metric



Vibration Pad



Rubber Pad

See page 347-350 for threaded tube insert glides.

Item No.	A	C	D	F	Max. Static Load Newtons	Price Each
RST-533	M8 x 1.25	27	80	45	10,000	5.09
RST-534	M8 x 1.25	27	80	70	10,000	5.67
RST-535	M10 x 1.50	27	80	45	10,000	5.20
RST-536	M10 x 1.50	27	80	70	10,000	9.52
RST-537	M12 x 1.75	27	80	45	10,000	5.76
RST-538	M12 x 1.75	27	80	70	10,000	7.12
RST-539	M14 x 2.00	27	80	70	10,000	8.00
RST-540	M14 x 2.00	27	80	120	10,000	11.72
RST-541	M16 x 2.00	27	80	70	10,000	10.79
RST-542	M16 x 2.00	27	80	120	10,000	12.38
RST-543	M20 x 2.50	27	80	100	10,000	14.89
<b>Vibration Pads</b>						
RST-544	Rubber Pad for 80mm Base with Lag Holes					3.07

Specifications:

- Material: Black Nylon Base with Zinc Plated Steel rod

Features:

- Ideal for mounting machines or conveyers
- High Load bearing of 2000lbs (900kg) per foot
- Tilting & swiveling design (20° Max)




Bolt Down Base

Bolt Down Base

Item No.	Base Dia. (mm)	Stud Length (mm)	Thread	Price Each
468600	60	80	M8	2.89
468601	60	70	M10	3.09
468602	60	125	M10	3.99
468603	80	100	M12	4.89
468604	80	150	M12	5.91
468605	80	100	M16	7.01
468606	80	150	M16	8.42
468607	100	125	M12	6.75
468608	100	100	M16	8.10
468609	100	200	M16	11.83
468610	120	150	M16	10.41
468611	120	200	M16	12.73
468612	120	150	M20	14.27
468613	120	200	M24	20.96

PLASTIC BASED LEVELERS

**AFP Series**  
Articulating Adjustable Feet

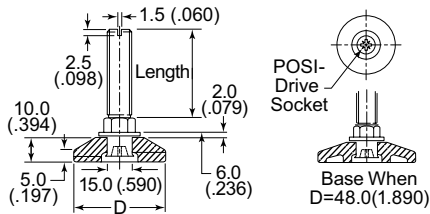

Specifications:


- Material: Polypropylene (PP), Low-Carbon Steel Stud with Zinc-Plated Finish
- Color: Black

Features:

- Allows adjustment under load with base remaining stationary

Item No.	D (Base)		Thread Size	Stud Length		Price Each
	In	mm		In	mm	
AFP25100A	0.984	25.00	1/4-20	0.750	19.05	2.32
AFP25110A	0.984	25.00	5/16-18	1.000	25.40	2.46
AFP25120A	0.984	25.00	5/16-18	1.500	38.10	2.77
AFP25130A	0.984	25.00	5/16-18	2.000	50.80	2.94
AFP25140A	0.984	25.00	5/16-18	2.750	69.85	3.18
AFP25150A	0.984	25.00	5/16-18	4.000	101.60	4.14
AFP30100A	1.181	30.00	5/16-18	1.000	25.40	2.54
AFP30110A	1.181	30.00	5/16-18	1.500	38.10	2.75
AFP30120A	1.181	30.00	5/16-18	2.000	50.80	3.03
AFP30130A	1.181	30.00	5/16-18	2.750	69.85	3.31
AFP30140A	1.181	30.00	5/16-18	3.000	76.20	5.15
AFP30150A	1.181	30.00	5/16-18	4.000	101.60	4.22
AFP30160A	1.181	30.00	3/8-16	1.000	25.40	2.93
AFP30180A	1.181	30.00	3/8-16	1.500	38.10	3.33
AFP30200A	1.181	30.00	3/8-16	2.000	50.80	3.76
AFP30210A	1.181	30.00	3/8-16	2.750	69.85	3.94
AFP30220A	1.181	30.00	3/8-16	4.000	101.60	4.50
AFP38100A	1.500	38.00	5/16-18	1.000	25.40	2.84
AFP38120A	1.500	38.00	5/16-18	1.500	38.10	3.03
AFP38130A	1.500	38.00	5/16-18	2.000	50.80	3.49
AFP38140A	1.500	38.00	5/16-18	2.750	69.85	3.86
AFP38150A	1.500	38.00	5/16-18	3.000	76.20	5.80
AFP38160A	1.500	38.00	5/16-18	4.000	101.60	4.35
AFP38170A	1.500	38.00	3/8-16	1.000	25.40	3.19
AFP38180A	1.500	38.00	3/8-16	1.500	38.10	3.58
AFP38200A	1.500	38.00	3/8-16	2.000	50.80	4.01
AFP38210A	1.500	38.00	3/8-16	2.750	69.85	4.22
AFP38220A	1.500	38.00	3/8-16	3.000	76.20	4.43
AFP38230A	1.500	38.00	3/8-16	4.000	101.60	4.68
AFP38240A	1.500	38.00	1/2-13	1.000	25.40	3.58
AFP38250A	1.500	38.00	1/2-13	1.500	38.10	3.93
AFP38260A	1.500	38.00	1/2-13	2.000	50.80	4.35
AFP38280A	1.500	38.00	1/2-13	2.750	69.85	4.71
AFP38290A	1.500	38.00	1/2-13	4.000	101.60	5.40
AFP48100A	1.890	48.00	5/16-18	1.000	25.40	3.05
AFP48110A	1.890	48.00	5/16-18	1.500	38.10	3.23
AFP48130A	1.890	48.00	5/16-18	2.000	50.80	3.55
AFP48140A	1.890	48.00	5/16-18	2.750	69.85	4.01
AFP48150A	1.890	48.00	5/16-18	4.000	101.60	4.50
AFP48170A	1.890	48.00	3/8-16	1.000	25.40	3.58
AFP48180A	1.890	48.00	3/8-16	1.500	38.10	3.77
AFP48200A	1.890	48.00	3/8-16	2.000	50.80	4.14
AFP48210A	1.890	48.00	3/8-16	2.375	60.33	4.25
AFP48220A	1.890	48.00	3/8-16	2.750	69.85	4.35
AFP48240A	1.890	48.00	3/8-16	4.000	101.60	4.86
AFP48250A	1.890	48.00	1/2-13	1.000	25.40	3.72
AFP48260A	1.890	48.00	1/2-13	1.500	38.10	4.07
AFP48270A	1.890	48.00	1/2-13	2.000	50.80	4.50
AFP48280A	1.890	48.00	1/2-13	2.750	69.85	4.85
AFP48290A	1.890	48.00	1/2-13	4.000	101.60	5.41

**AFS Series**  
Rigid Adjustable Feet

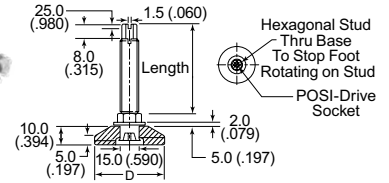


Specifications:

- Material: Polypropylene (PP), Low-Carbon Steel Stud with Zinc-Plated Finish
- Color: Black

Item No.	D (Base)		Thread Size	Stud Length		Price Each
	In	mm		In	mm	
AFS48410A	1.890	48.00	5/16-18	1.000	25.40	3.05
AFS48420A	1.890	48.00	5/16-18	1.500	38.10	3.23
AFS48430A	1.890	48.00	5/16-18	2.000	50.80	3.55
AFS48440A	1.890	48.00	5/16-18	2.750	69.85	4.00
AFS48450A	1.890	48.00	5/16-18	4.000	101.60	4.50
AFS48460A	1.890	48.00	3/8-16	1.000	25.40	3.50
AFS48470A	1.890	48.00	3/8-16	1.500	38.10	3.77
AFS48480A	1.890	48.00	3/8-16	2.000	50.80	4.14
AFS48490A	1.890	48.00	3/8-16	2.750	69.85	4.35
AFS48500A	1.890	48.00	3/8-16	4.000	101.60	4.86
AFS48510A	1.890	48.00	1/2-13	1.000	25.40	3.72
AFS48520A	1.890	48.00	1/2-13	1.500	38.10	4.07
AFS48530A	1.890	48.00	1/2-13	2.000	50.80	4.50
AFS48540A	1.890	48.00	1/2-13	2.750	69.85	4.85
AFS48550A	1.890	48.00	1/2-13	4.000	101.60	5.41

**AFT Series**  
Swivel Tilting Adjustable Feet



Specifications:

- Material: Polypropylene (PP), Zinc-Plated Steel Tilt Ball and Stud
- Color: Black


Features:

- Max 25° tilt

Item No.	D (Base)		Thread Size	Stud Length		Price Each
	In	mm		In	mm	
AFT25100A	0.984	25.00	1/4-20	1.000	25.40	2.50
AFT25110A	0.984	25.00	5/16-18	0.500	12.70	2.10
AFT25120A	0.984	25.00	5/16-18	1.000	25.40	2.50
AFT25130A	0.984	25.00	3/8-16	0.500	12.70	2.00
AFT25140A	0.984	25.00	3/8-16	1.500	38.10	2.70
AFT25150A	0.984	25.00	3/8-16	2.000	50.80	2.90
AFT32160A	1.260	32.00	1/4-20	1.000	25.40	2.80
AFT32170A	1.260	32.00	5/16-18	1.000	25.40	2.60
AFT32180A	1.260	32.00	5/16-18	1.500	38.10	2.80
AFT32190A	1.260	32.00	3/8-16	1.000	25.40	2.30
AFT32200A	1.260	32.00	3/8-16	2.000	50.80	3.00
AFT32210A	1.260	32.00	3/8-16	3.000	76.20	3.20
AFT32220A	1.496	38.00	5/16-18	1.000	25.40	2.90
AFT32230A	1.496	38.00	5/16-18	1.500	38.10	3.10
AFT32240A	1.496	38.00	3/8-16	1.000	25.40	2.70
AFT32250A	1.496	38.00	3/8-16	2.000	50.80	3.30
AFT32260A	1.496	38.00	3/8-16	3.000	76.20	3.30
AFT47270A	1.850	47.00	5/16-18	1.000	25.40	3.50
AFT47280A	1.850	47.00	5/16-18	2.000	50.80	3.60
AFT47290A	1.850	47.00	3/8-16	1.000	25.40	3.60
AFT47300A	1.850	47.00	3/8-16	2.000	50.80	3.80
AFT47310A	1.850	47.00	3/8-16	3.000	76.20	3.50

**PLASTIC BASED LEVELERS**

**AFB Series  
Nylon Based Adjustable Feet**

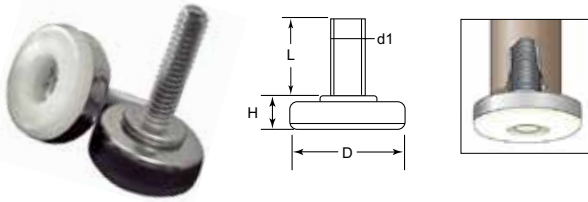


- Specifications:
- Material: Nylon Base, Low-Carbon Steel Stud With Zinc-Plated Finish and Nickel-Plated Shell
  - Color: Natural Nylon Base with Nickel-Plated Shell

- Features:
- Economic leveler ideal for uneven surfaces
  - Nylon base provides a smooth non-abrasive surface
  - Excellent for leveling cabinets, office furniture and light-duty machines

Item No.	D (Base)		H (Height)		L		d1 (Thread)	Price Each
	In	mm	In	mm	In	mm		
AFB1010A	1.000	25.40	0.438	11.11	1.000	25.40	1/4"-20	1.40
AFB1015A	1.000	25.40	0.438	11.11	2.000	50.80	1/4"-20	1.80
AFB1020A	1.375	34.93	0.594	15.08	1.000	25.40	3/8"-16	1.70
AFB1025A	1.375	34.93	0.594	15.08	2.000	50.80	3/8"-16	3.00

**AFE Series  
Nylon Based With Hex Adjustable Feet**

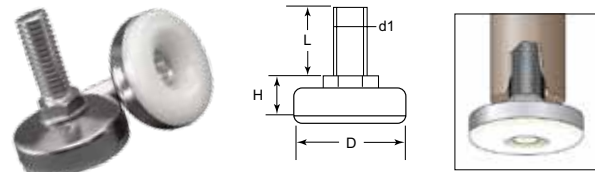

- Specifications:
- Material: Nylon Base, Low-Carbon Steel Stud with Zinc-Plated Finish and Nickel-Plated Shell
  - Color: Natural Nylon Base with Nickel-Plated Shell

- Features:
- Integral hexagonal nut allows adjustment under a positive load
  - Nylon base provides a smooth non-abrasive surface
  - Excellent for leveling cabinets, office furniture and light-duty machines


Item No.	D (Base)		H (Height)		L		d1 (Thread)	Price Each
	In	mm	In	mm	In	mm		
AFE1010A	1.375	34.93	0.700	17.78	1.000	25.40	3/8"-16	1.80
AFE1015A	1.375	34.93	0.700	17.78	2.000	50.80	3/8"-16	3.00

**AFR Series  
Nylon Based Adjustable Feet**



Item No.	D (Base)		H (Height)		L		d1 (Thread)	Price Each
	In	mm	In	mm	In	mm		
AFR1010A	1.125	28.58	0.438	11.11	1.000	25.40	1/4"-20	1.30
AFR1015A	1.125	28.58	0.438	11.11	2.000	50.80	1/4"-20	1.60
AFR1020A	1.125	28.58	0.438	11.11	1.000	25.40	5/16"-18	1.40
AFR1025A	1.125	28.58	0.438	11.11	2.000	50.80	5/16"-18	1.80
AFR1030A	1.300	33.02	0.500	12.70	1.000	25.40	3/8"-16	1.70
AFR1035A	1.300	33.02	0.500	12.70	2.000	50.80	3/8"-16	2.30
AFR1040A	1.750	44.45	0.531	13.49	1.000	25.40	3/8"-16	1.80
AFR1045A	1.750	44.45	0.531	13.49	2.000	50.80	3/8"-16	2.90

**AFD Series  
Nylon Based With Hex Adjustable Feet**

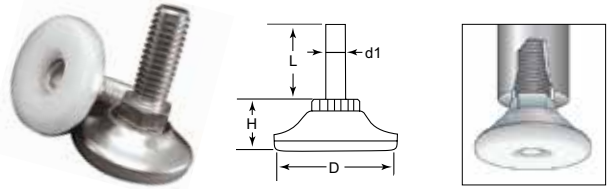

- Specifications:
- Material: Nylon Base, Low-Carbon Steel Stud with Zinc-Plated Finish and Nickel-Plated Shell
  - Color: Natural Nylon Base with Nickel-Plated Shell

- Features:
- Integral hexagonal nut allows adjustment under load
  - Nylon base provides a smooth non-abrasive surface
  - Excellent for leveling cabinets, office furniture and light-duty machines
  - Attractive nickel finish

Item No.	D (Base)		H (Height)		L		d1 (Thread)	Price Each
	In	mm	In	mm	In	mm		
AFD1010A	1.300	33.02	0.625	15.88	1.000	25.40	3/8"-16	1.70
AFD1020A	1.750	44.45	0.688	17.46	1.000	25.40	3/8"-16	2.30
AFD1025A	1.750	44.45	0.688	17.46	2.000	25.40	3/8"-16	2.60


**MBC Series  
Glide Base Caps**



- Specifications:
- Material: Nylon or LDPE
  - Color: Natural

- Features:
- Low profile
  - Effectively encapsulates standard metal base glides

Item No.	Base Cap O.D. In	Material	Price Each
MBC1200A	0.875	Nylon	0.44
MBC1210A	1.000	LDPE	0.78
MBC1220A	1.062	Nylon	0.44
MBC1230A	1.200	LDPE	0.87
MBC1240A	1.218	Nylon	0.64
MBC1250A	1.250	LDPE	0.87
MBC1260A	1.250	Nylon	1.31

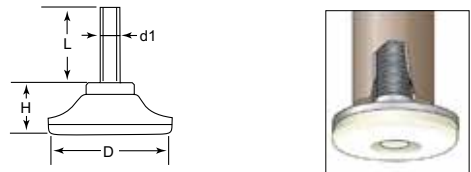


- Specifications:
- Material: Nylon Base, Low-Carbon Steel Stud With Zinc-Plated Finish and Nickel-Plated Shell
  - Color: Natural Nylon Base with Nickel-Plated Shell

- Features:
- Economic leveler ideal for uneven surfaces
  - Nylon base provides a smooth non-abrasive surface
  - Excellent for leveling cabinets, office furniture and light-duty machines

PLASTIC BASED LEVELERS

**AFH Series**  
Steel Based Adjustable Feet



Specifications:


- Material: Low-Carbon Steel Stud with Zinc-Plated Finish and Nickel-Plated Shell

Features:

- Economic leveler ideal for uneven surfaces
- Steel shell base provides a smooth non-skid surface
- Excellent for leveling cabinets, office furniture and light-duty machines
- Polymer cushion provided shock absorption
- Attractive chrome finish

Item No.	D (Base)		H (Height)		h (Height)		L		d1 (Thread)	Price Each
	In	mm	In	mm	In	mm	In	mm		
AFH1010A	0.748	19.00	0.236	6.00	0.157	4.00	0.650	16.50	1/4"-20	<b>0.90</b>
AFH1015A	0.748	19.00	0.236	6.00	0.157	4.00	1.000	25.40	1/4"-20	<b>1.20</b>
AFH1020A	0.866	22.00	0.236	6.00	0.157	4.00	0.650	16.50	1/4"-20	<b>1.00</b>
AFH1025A	0.866	22.00	0.236	6.00	0.157	4.00	1.500	38.10	1/4"-20	<b>1.20</b>
AFH1030A	0.945	24.00	0.236	6.00	0.157	4.00	0.650	16.50	1/4"-20	<b>1.00</b>
AFH1035A	0.945	24.00	0.236	6.00	0.157	4.00	1.500	38.10	1/4"-20	<b>1.30</b>
AFH1040A	1.063	27.00	0.236	6.00	0.157	4.00	1.000	25.40	1/4"-20	<b>1.10</b>
AFH1045A	1.063	27.00	0.236	6.00	0.157	4.00	2.000	50.80	1/4"-20	<b>1.60</b>

**AFJ Series**  
Black Nylon Based Stepped Adjustable Feet



Specifications:


- Material: Nylon Base, Low-Carbon Steel Stud with Zinc-Plated Finish
- Color: Black

Features:


- Economic leveler for uneven surfaces
- Excellent for leveling cabinets, office furniture and light-duty machines
- Polymer cushion provides shock absorption

Item No.	D (Base)		H (Height)		L		d1 (Thread)	Price Each
	In	mm	In	mm	In	mm		
AFJ1010A	1.000	25.40	0.375	9.53	0.875	22.23	1/4"-20	<b>1.20</b>
AFJ1020A	1.000	25.40	0.375	9.53	1.000	25.40	1/4"-20	<b>1.00</b>
AFJ1030A	1.000	25.40	0.375	9.53	1.500	38.10	1/4"-20	<b>1.10</b>
AFJ1040A	1.000	25.40	0.375	9.53	1.750	44.45	1/4"-20	<b>1.10</b>
AFJ1050A	1.000	25.40	0.375	9.53	0.875	22.23	5/16"-18	<b>1.00</b>
AFJ1060A	1.000	25.40	0.375	9.53	1.000	25.40	5/16"-18	<b>1.60</b>
AFJ1070A	1.000	25.40	0.375	9.53	1.500	38.10	5/16"-18	<b>1.10</b>
AFJ1080A	1.000	25.40	0.375	9.53	1.750	44.45	5/16"-18	<b>1.10</b>

**AFW Series**  
Black Nylon Based With Metal Hex Adjustable Feet



Style 1



Style 2



Specifications:

- Material: Nylon Base, Low-Carbon Steel Stud with Zinc-Plated Finish
- Color: Black


Features:

- Integral hexagonal nut allows adjustment under a load
- Nylon base provides a smooth non-abrasive surface
- Excellent for leveling cabinets, office furniture and light-duty machines
- Style 1 – comes with screw slot



Item No.	D (Base)		H (Height)		L		d1 (Thread)	Style	Price Each
	In	mm	In	mm	In	mm			
AFW1010A	1.688	42.86	0.690	17.52	1.000	25.40	3/8"-16	1	<b>1.60</b>
AFW1020A	1.688	42.86	0.690	17.52	1.500	38.10	3/8"-16	1	<b>1.70</b>
AFW1030A	1.688	42.86	0.690	17.52	2.000	50.80	3/8"-16	1	<b>3.00</b>
AFW1040A	1.688	42.86	0.690	17.52	3.000	76.20	3/8"-16	1	<b>2.10</b>
AFW2010A	1.000	25.40	0.665	16.89	1.000	25.40	1/4"-20	2	<b>1.10</b>
AFW2020A	1.000	25.40	0.665	16.89	1.500	38.10	1/4"-20	2	<b>1.20</b>
AFW2030A	1.000	25.40	0.690	17.52	1.625	41.28	1/4"-20	2	<b>1.30</b>
AFW2035A	1.000	25.40	0.665	16.89	2.000	50.80	1/4"-20	2	<b>1.60</b>
AFW2040A	1.000	25.40	0.675	17.15	1.000	25.40	5/16"-18	2	<b>1.20</b>
AFW2050A	1.000	25.40	0.665	16.89	1.500	38.10	5/16"-18	2	<b>1.30</b>
AFW2060A	1.000	25.40	0.665	16.89	1.625	41.28	5/16"-18	2	<b>1.40</b>
AFW2065A	1.000	25.40	0.675	17.15	2.000	50.80	5/16"-18	2	<b>1.80</b>

**AFA Series**  
Plastic Based Adjustable Feet



Specifications:

- Material: LDPE or Polyurethane Base, Low-Carbon Steel Stud with Zinc-Plated Finish
- Color: Black

Features:

- Available in low-cost Polyethylene or the more durable Polyurethane
- Excellent for leveling cabinets, office furniture and light-duty machines


Item No.	Material	D (Base)		H (Height)		L		d1 (Thread)	Price Each
		In	mm	In	mm	In	mm		
AFA1010A	LDPE	1.625	41.28	0.438	11.11	1.313	33.34	3/8"-16	<b>1.40</b>
AFA1010B	PUR	1.625	41.28	0.438	11.11	1.313	33.34	3/8"-16	<b>1.90</b>
AFA1020B	LDPE	1.625	41.28	0.438	11.11	2.500	63.50	3/8"-16	<b>2.60</b>
AFA1020A	PUR	1.625	41.28	0.438	11.11	2.500	63.50	3/8"-16	<b>1.90</b>

**PLASTIC BASED LEVELERS**


**AFG Series**  
Black Nylon Based Adjustable Feet



Style 1



Style 2



Specifications:

- Material: Nylon Base, Low-Carbon Steel Stud with Zinc-Plated Finish
- Color: Black

Features:

- Integral hexagonal nut allows adjustment under load
- Nylon base provides a smooth non-abrasive surface
- Excellent for leveling cabinets, office furniture and light-duty machines
- Style 1 – comes with screw slot




Item No.	D (Base)		H (Height)		L		d1 (Thread)	Style	Price Each
	In	mm	In	mm	In	mm			
AFG1010A	1.000	25.40	0.375	9.53	0.750	19.05	5/16"-18	1	1.10
AFG1020A	1.000	25.40	0.375	9.53	1.000	25.40	5/16"-18	1	1.10
AFG1030A	1.000	25.40	0.375	9.53	1.500	38.10	5/16"-18	1	2.00
AFG1040A	1.000	25.40	0.375	9.53	2.000	50.80	5/16"-18	1	1.30
AFG2010A	1.000	25.40	0.375	9.53	0.750	19.05	5/16"-18	2	1.10
AFG2020A	1.000	25.40	0.375	9.53	1.000	25.40	5/16"-18	2	1.20
AFG2030A	1.000	25.40	0.375	9.53	1.500	38.10	5/16"-18	2	1.30
AFG2040A	1.375	34.93	0.375	9.53	1.000	25.40	1/4"-20	2	1.10
AFG2045A	1.375	34.93	0.375	9.53	1.500	38.10	1/4"-20	2	2.10
AFG2050A	1.375	34.93	0.375	9.53	0.750	19.05	5/16"-18	2	1.20
AFG2060A	1.375	34.93	0.375	9.53	1.000	25.40	5/16"-18	2	2.00
AFG2070A	1.375	34.93	0.375	9.53	1.500	38.10	5/16"-18	2	1.30
AFG2075A	1.375	34.93	0.375	9.53	2.000	50.80	5/16"-18	2	2.30

**SAI Series**  
Square Ribbed Inserts with Adjustable Feet



Item No.	Tube Size		Fits Gauge	Reference Dimensions A	B	C	D	Axial Load lbs	Price Each	
	In	mm								
SAI100A	0.750	20.00	14-18	1.5-2.0	0.158	0.866	0.197	0.945	220	4.69
SAI200A	0.875	22.00	14-18	1.5-2.0	0.158	0.866	0.197	0.945	220	5.00
SAI300A	1.000	25.00	14-18	1.5-2.0	0.197	0.985	0.197	0.906	330	5.24
SAI400A	1.181	30.00	14-18	1.5-2.0	0.197	0.985	0.197	0.787	660	6.29
SAI500A	1.375	35.00	14-18	1.5-2.0	0.197	1.358	0.197	0.787	660	7.60
SAI600A	1.500	40.00	14-18	1.5-2.0	0.197	1.358	0.197	0.787	660	8.70
SAI700A	1.750	45.00	14-18	1.5-2.0	0.197	1.358	0.197	1.102	660	11.02
SAI800A	2.000	50.00	14-18	1.5-2.0	0.197	1.358	0.197	1.142	660	11.82

**TB Series**  
Threaded Insert Bumper



Specifications:


- Material: IIR; 40-50 Shore A

Features:

- Can be used as a leveling device or bumper for small equipment
- Non-corrosive stud

Item No.	Thread	H		L		D		Price Each
		In	mm	In	mm	In	mm	
TB-1	#6-32	0.200	5.1	0.400	10.2	0.380	9.5	2.83
TB-2	#8-32	0.200	5.1	0.400	10.2	0.380	9.5	3.11
TB-3	M3	0.200	5.1	0.400	10.2	0.380	9.5	2.83
TB-4	M4	0.200	5.1	0.400	10.2	0.380	9.5	3.11

**RAI Series**  
Round Ribbed Inserts with Adjustable Feet



Specifications:

- Material: Nylon
- Color: Black

Features:

- Rugged, durable, heavy duty
- Resists lateral stresses
- Threaded insert and height adjuster in one piece


Item No.	Tube Size		Fits Gauge	Reference Dimensions				Axial Load lbs	Price Each	
	In	mm		A	B	C	D			
RAI100A	1.250	32	14-18	1.5-2.0	0.197	0.985	0.197	0.787	660	3.20
RAI200A	1.375	35	14-18	1.5-2.0	0.197	1.358	0.197	0.787	660	6.18
RAI300A	1.500	40	14-18	1.5-2.0	0.197	1.358	0.197	0.787	660	7.36
RAI400A	1.750	45	14-18	1.5-2.0	0.197	1.358	0.197	1.102	660	9.39
RAI500A	2.000	50	14-18	1.5-2.0	0.197	1.358	0.197	1.181	660	10.50
RAI600A	2.375	60	14-18	1.5-2.0	0.394	1.595	0.236	1.457	660	23.60
RAI700A	3.125	80	14-18	1.5-2.0	0.394	1.595	0.236	1.457	660	35.73

Specifications:

- Material: Nylon
- Color: Black


Features:

- Rugged, durable, heavy duty
- Resists lateral stresses
- Threaded insert and height adjuster in one piece



PLASTIC BASED LEVELERS

**AFPM Series**  
Articulating Adjustable Feet  
Metric

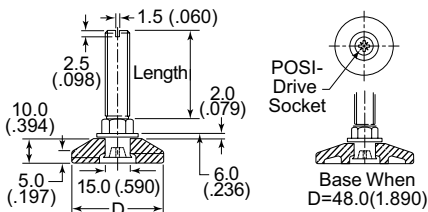

Specifications:


- Material: Polypropylene (PP), Low-Carbon Steel Stud with Zinc-Plated Finish
- Color: Black

Features:

Allows adjustment under load with base remaining stationary

Item No.	D Base mm	Thread Size	Stud Length mm	Price Each
466212	25	M6	20	1.50
466167	25	M8	25	1.70
466168	25	M8	40	2.30
466169	25	M8	55	2.40
466170	25	M8	70	2.60
466171	25	M8	100	3.10
466172	30	M6	25	1.80
466173	30	M6	40	2.10
466174	30	M6	55	2.50
466175	30	M6	70	2.70
466176	30	M6	100	3.20
466177	30	M10	25	2.10
466178	30	M10	40	2.40
466179	30	M10	55	2.90
466180	30	M10	70	3.00
466181	30	M10	100	3.70
466182	38	M8	25	1.90
466183	38	M8	40	2.10
466184	38	M8	55	2.60
466185	38	M8	70	2.80
466186	38	M8	100	3.30
466187	38	M10	25	2.20
466188	38	M10	40	2.40
466189	38	M10	55	2.60
466190	38	M10	70	2.80
466191	38	M10	100	3.90
466192	38	M12	25	2.50
466193	38	M12	40	2.80
466194	38	M12	55	3.10
466195	38	M12	70	3.40
466196	38	M12	100	4.20
466197	48	M8	25	2.00
466198	48	M8	40	2.30
466199	48	M8	55	2.70
466200	48	M8	70	3.00
466201	48	M8	100	3.40
466202	48	M10	25	2.30
466203	48	M10	40	2.50
466204	48	M10	55	2.80
466205	48	M10	70	3.30
466206	48	M10	100	3.90
466207	48	M12	25	2.60
466208	48	M12	40	2.80
466209	48	M12	55	3.20
466211	48	M12	100	4.40

**AFSM Series**  
Rigid Adjustable Feet  
Metric

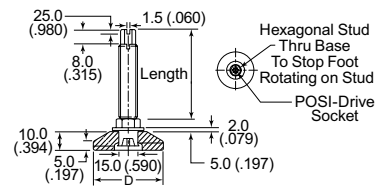

Specifications:

- Material: Polypropylene (PP), Low-Carbon Steel Stud with Zinc-Plated Finish

Color: Black

Item No.	D Base mm	Thread Size	Stud Length mm	Price Each
466121	25	M6	20	1.50
466122	25	M8	25	1.70
466123	25	M8	40	2.30
466124	25	M8	55	2.40
466125	25	M8	70	2.60
466126	25	M8	100	3.10
466127	30	M8	25	1.80
466128	30	M8	40	2.10
466129	30	M8	55	2.50
466130	30	M8	70	2.70
466131	30	M8	100	3.20
466132	30	M10	25	2.10
466133	30	M10	40	2.40
466134	30	M10	55	2.90
466135	30	M10	70	3.00
466136	30	M10	100	3.70
466137	38	M8	25	1.90
466138	38	M8	40	2.10
466139	38	M8	55	2.60
466140	38	M8	70	2.80
466141	38	M8	100	3.30
466142	38	M10	25	2.20
466143	38	M10	40	2.40
466144	38	M10	55	2.60
466145	38	M10	70	2.60
466146	38	M10	100	3.10
466147	38	M12	25	3.80
466148	38	M12	40	2.50
466149	38	M12	55	2.80
466150	38	M12	70	3.10
466151	38	M12	100	3.40
466152	48	M8	25	4.20
466153	48	M8	40	2.00
466154	48	M8	55	2.30
466155	48	M8	70	2.70
466156	48	M8	100	3.00
466157	48	M10	25	3.40
466158	48	M10	40	2.30
466159	48	M10	55	2.50
466160	48	M10	70	2.80
466161	48	M10	100	3.30
466162	48	M12	25	3.90
466163	48	M12	40	2.60
466164	48	M12	55	2.80
466165	48	M12	70	3.20
466166	48	M12	100	3.50



**THREADED INSERTS**

**AFTM Series  
Swivel Tilting Adjustable Feet  
Metric**



Specifications:

- Material: Polypropylene (PP), Low-Carbon Steel Stud with Zinc-Plated Finish
- Color: Black

Item No.	Thread	Diameter (mm)		Price Each
		Base Dia.	Stud Length	
462183	M6	25.0	25.0	1.00
462184	M6	32.5	25.0	1.20
110728	M8	25.0	12.0	1.50
110732	M8	25.0	25.0	1.50
110729	M8	32.0	12.0	1.70
110733	M8	32.0	25.0	1.73
110730	M8	38.0	12.0	1.30
110734	M8	38.0	25.0	1.30
110731	M8	47.5	12.0	1.40
110735	M8	47.5	25.0	1.10
110736	M10	25.0	15.0	1.40

Item No.	Thread	Diameter (mm)		Price Each
		Base Dia.	Stud Length	
110740	M10	25.0	38.0	1.70
110744	M10	25.0	50.0	6.00
110737	M10	32.0	15.0	1.80
110741	M10	32.0	38.0	1.90
110745	M10	32.0	50.0	1.80
110738	M10	38.0	15.0	1.40
110742	M10	38.0	38.0	1.50
110746	M10	38.0	50.0	4.10
110739	M10	47.5	15.0	1.50
110743	M10	47.5	38.0	1.60
110747	M10	47.5	50.0	3.40

**AFBM Series  
Nylon Based Adjustable Feet  
Metric**



Specifications:

- Material: Nylon Base, Low-Carbon Steel Stud With Zinc-Plated Finish and Nickel-Plated Shell
- Color: Natural Nylon Base with Nickel-Plated Shell

Features:

- Economic leveler ideal for uneven surfaces
- Nylon base provides a smooth non-abrasive surface
- Excellent for leveling cabinets, office furniture and light-duty machines

Item No.	Thread	Diameter (mm)		Price Each
		Base Dia.	Stud Length	
RWA25M0820	M8	25	20	1.60
RWA35M0820	M8	35	20	1.80
RWA45M0820	M8	45	20	2.00
RWB50M0820*	M8	50	20	2.00
RWA45M1045	M10	45	45	2.40


**TUBE  
INSERTS**



Pages 347 - 357

TACK GLIDES

**AFHM Series**  
Steel Based Adjustable Feet  
Metric



Specifications:


- Material: Low-Carbon Steel Stud with Zinc-Plated Finish and Nickel-Plated Shell

Features:

- Economic leveler ideal for uneven surfaces
- Steel shell base provides a smooth non-skid surface
- Excellent for leveling cabinets, office furniture and light-duty machines
- Polymer cushion provided shock absorption
- Attractive chrome finish

Item No.	D Base mm	Thread Size	Stud Length mm	Price Each
465347	20	M6	10	1.70
465346	25	M8	20	1.40
465345	25	M10	20	1.50
465352	30	M8	20	2.50
465350	30	M10	20	1.90
465355	35	M8	20	1.90
465356	40	M8	25	3.00
465359	40	M10	25	2.60
465358	40	M10	40	3.30
465354	40	M10	60	3.40

**TKG Series**  
Tack Glides



Specifications:


- Material: High-Density Polyethylene with Nickel Plated Nail
- Color: Available in both Natural and Light Brown

Features:

- Available in two styles
- Ideal for wooden furniture

Natural Item No.	Brown Item No.	D (Base)		H (Height)		L		Price Each
		In	mm	In	mm	In	mm	
TKG1010A	TKG1010B	0.625	15.88	0.250	6.35	0.719	18.26	0.07
TKG1020A	TKG1020B	0.750	19.05	0.250	6.35	0.719	18.26	0.08
TKG1030A	TKG1030B	0.875	22.23	0.250	6.35	0.719	18.26	0.10
TKG1040A	TKG1040B	1.000	25.40	0.250	6.35	0.719	18.26	0.10


**TKM Series**  
Steel Based Glide



Ideal for use on Smooth Surfaces

Item No.	D	H	L	Price Each
497411	.75	.393	.709	0.40
497412	.87	.393	.709	0.46
497413	.94	.393	.709	0.58
497414	1.06	.393	.709	0.70
497415	1.18	.393	.709	0.82

**TKT Series**  
PTFE Based Glide




Ideal when easy movement is essential

Item No.	D	H	L	C	Price Each
499499	.75	.393	.709	.102	0.71
499500	.87	.393	.709	.102	0.77
499501	.98	.393	.709	.102	0.91
499502	1.18	.393	.709	.102	1.24
499503	1.46	.393	.709	.102	1.78

**RIVET FEET**

**FF Series  
Fast Foot**



Specifications:


- Material: TPR over Acetal
- Color: Black
- Flame Class: UL94 HB

Item No.	Hole Dia.		Panel Thickness		D		H		Price Each
	In	mm	In	mm	In	mm	In	mm	
FF-001B	0.199	5.1	0.039 - 0.091	1.0 - 2.3	0.950	24.0	0.551	14.0	1.10
FF-003-P3X5.5B	0.124	3.2	0.031 - 0.071	0.8 - 1.8	0.560	14.2	0.217	5.5	0.86
FF-004B	0.199	5.1	0.039 - 0.091	1.0 - 2.3	0.790	20.0	0.394	10.0	1.06
FF-005-P4X5B	0.163	4.2	0.039 - 0.091	0.8 - 1.8	0.830	21.0	0.165	4.2	0.69
FF-005-P4X6B	0.163	4.2	0.071 - 0.111	1.8 - 2.8	0.830	21.0	0.165	4.2	0.69
FF-005-P4X7B	0.163	4.2	0.114 - 0.146	2.9 - 3.7	0.830	21.0	0.165	4.2	0.69
FF-005-P4X8B	0.163	4.2	0.150 - 0.189	3.8 - 4.8	0.830	21.0	0.165	4.2	0.69
FF-006-P4X6B	0.163	4.2	0.024 - 0.039	0.6 - 1.0	0.590	15.0	0.236	6.0	0.69
FF-006-P4X7B	0.163	4.2	0.039 - 0.079	1.0 - 2.0	0.590	15.0	0.236	6.0	0.63
FF-006-P4X8B	0.163	4.2	0.079 - 0.118	2.0 - 3.1	0.590	15.0	0.236	6.0	0.63
FF-006-P5X6.5B	0.203	5.2	0.031 - 0.047	0.8 - 1.2	0.590	15.0	0.236	6.0	0.63
FF-006-P5X7.5B	0.203	5.2	0.051 - 0.091	1.3 - 2.3	0.590	15.0	0.236	6.0	0.66
FF-008-P4X6B	0.163	4.2	0.031 - 0.071	0.8 - 1.8	0.830	21.0	0.236	6.0	0.88
FF-008-P4X7B	0.163	4.2	0.075 - 0.110	1.9 - 2.8	0.830	21.0	0.236	6.0	0.88
FF-008-P4X8B	0.163	4.2	0.114 - 0.157	2.9 - 4.0	0.830	21.0	0.236	6.0	0.88
FF-009-P4X6B	0.163	4.2	0.000 - 0.031	0.0 - 0.8	0.830	21.0	0.315	8.0	0.98
FF-009-P4X7B	0.163	4.2	0.031 - 0.079	0.8 - 2.0	0.830	21.0	0.315	8.0	0.98
FF-009-P4X8B	0.163	4.2	0.083 - 0.118	2.1 - 3.0	0.830	21.0	0.315	8.0	0.98
FF-010-P4X7B	0.163	4.2	0.039 - 0.079	1.0 - 2.0	0.590	15.0	0.354	9.0	0.63
FF-010-P4X8B	0.163	4.2	0.079 - 0.118	2.0 - 3.1	0.590	15.0	0.354	9.0	0.69
FF-13-P3.5X4.5B	0.144	3.7	0.020 - 0.047	0.5 - 1.2	0.430	10.8	0.157	4.0	0.51
FF-13-P3.5X5.5B	0.144	3.7	0.047 - 0.079	1.2 - 2.0	0.430	10.8	0.157	4.0	0.51
FF-13-P3.5X6.0B	0.144	3.7	0.059 - 0.087	1.5 - 2.2	0.430	10.8	0.157	4.0	0.60
FF-13-P3.5X7.0B	0.144	3.7	0.098 - 0.126	2.5 - 3.2	0.430	10.8	0.157	4.0	0.60

**SFF  
Soft Fast Foot**



- Rivet is pushed in, locking foot in place
- Prevents surface damage with anti-skid and scratch resistant properties
- Made of abrasion resistant rubber to help cushion and provide vibration control
- High shear strength
- Material: Foot: UL94 HB TPE, 86 Shore A
- Pin: Polypropylene
- Color: Black




Item No.	Hole Ø	Panel Thickness	"A" Ref.	"C" Ref.	"D" Ref.	Price Each
SFF-018	.305 (7.75)	.031 - .059 (0.8 - 1.5)	.71 (18)	.39 (10)	.79 (20)	0.84
SFF-021	.305 (7.75)	.197 - .315 (5 - 8)	.79 (20)	.24 (6)	.83 (21)	1.24
SFF-023	.305 (7.75)	.031 - .059 (0.8 - 1.5)	.91 (23)	.20 (5)	.98 (25)	0.92
SFF-028	.305 (7.75)	.031 - .059 (0.8 - 1.5)	.71 (18)	.59 (15)	.79 (20)	1.22

**FSR Series  
Snap Rivet Mount Foot**



Specifications:


- Material: TPE over Nylon 6
- Color: Black
- Flame Class: UL94V-2



Item No.	Hole Diameter		Panel Thickness		D		H		C		Price Each
	In	mm	In	mm	In	mm	In	mm	In	mm	
FSR-1	0.144	3.7	0.047 - 0.083	1.2 - 2.1	0.394	10.0	0.189	4.8	0.138	3.5	0.36
FSR-2	0.144	3.7	0.083 - 0.118	2.1 - 3.0	0.394	10.0	0.189	4.8	0.177	4.5	0.36
FSR-3	0.163	4.1	0.098 - 0.138	2.5 - 3.5	0.394	10.0	0.189	4.8	0.197	5.0	0.37
FSR-4	0.144	3.7	0.047 - 0.083	1.2 - 2.1	0.500	12.7	0.138	3.5	0.138	3.5	0.36
FSR-5	0.144	3.7	0.083 - 0.118	2.1 - 3.0	0.500	12.7	0.138	3.5	0.177	4.5	0.37
FSR-6	0.163	4.1	0.098 - 0.138	2.5 - 3.5	0.500	12.7	0.138	3.5	0.197	5.0	0.37

RIVET FEET & STEM BUMPERS

RF Series  
Rivet Feet



Specifications:


- Rivet Material: Nylon 6
- Foot Material: TPE
- Color: Black

Features:

- Feet are supplied with incorporated push rivets to quickly and easily install into pre-drilled holes
- Can be removed by pushing the plunger back thru from the opposite side

Item No.	Panel Thickness		Hole Dia		d		D		H		Price Each
	In	mm	In	mm	In	mm	In	mm	In	mm	
RF100B	0.031 - 0.071	0.8 - 1.8	0.122 - 0.126	3.1 - 3.2	0.531	13.5	0.559	14.2	0.217	5.5	1.38
RF105B	0.071 - 0.110	1.8 - 2.8	0.122 - 0.126	3.1 - 3.2	0.531	13.5	0.559	14.2	0.217	5.5	1.38
RF110B	0.013 - 0.071	0.8 - 1.8	0.161 - 0.165	4.1 - 4.2	0.790	20.0	0.827	21.0	0.165	4.2	1.72
RF115B	0.071 - 0.110	1.8 - 2.8	0.161 - 0.165	4.1 - 4.2	0.790	20.0	0.827	21.0	0.165	4.2	1.72
RF120B	0.114 - 0.146	2.9 - 3.7	0.161 - 0.165	4.1 - 4.2	0.790	20.0	0.827	21.0	0.165	4.2	1.72
RF125B	0.150 - 0.189	3.8 - 4.8	0.161 - 0.165	4.1 - 4.2	0.790	20.0	0.827	21.0	0.165	4.2	1.72
RF130B	Max 0.020	(max 0.8)	0.161 - 0.165	4.1 - 4.2	0.551	14.0	0.591	15.0	0.236	6.0	1.48
RF135B	0.024 - 0.039	0.6 - 1.0	0.161 - 0.165	4.1 - 4.2	0.551	14.0	0.591	15.0	0.236	6.0	1.48
RF140B	0.039 - 0.079	1.0 - 2.0	0.161 - 0.165	4.1 - 4.2	0.551	14.0	0.591	15.0	0.236	6.0	1.48
RF145B	0.079 - 0.118	2.0 - 3.1	0.161 - 0.165	4.1 - 4.2	0.551	14.0	0.591	15.0	0.236	6.0	1.48
RF150B	0.031 - 0.047	0.8 - 1.2	0.200 - 0.205	5.1 - 5.2	0.551	14.0	0.591	15.0	0.236	6.0	1.48
RF155B	0.051 - 0.091	1.3 - 2.3	0.200 - 0.205	5.1 - 5.2	0.551	14.0	0.591	15.0	0.236	6.0	1.48
RF160B	0.031 - 0.071	0.8 - 1.8	0.161 - 0.165	4.1 - 4.2	0.790	20.0	0.827	21.0	0.236	6.0	1.97
RF165B	0.075 - 0.110	1.9 - 2.8	0.161 - 0.165	4.1 - 4.2	0.790	20.0	0.827	21.0	0.236	6.0	1.97
RF170B	0.114 - 0.157	2.9 - 4.0	0.161 - 0.165	4.1 - 4.2	0.790	20.0	0.827	21.0	0.236	6.0	1.97
RF175B	Max 0.020	(max 0.8)	0.161 - 0.165	4.1 - 4.2	0.790	20.0	0.827	21.0	0.315	8.0	2.07
RF180B	0.039 - 0.079	1.0 - 2.0	0.161 - 0.165	4.1 - 4.2	0.790	20.0	0.827	21.0	0.315	8.0	2.07
RF185B	0.083 - 0.118	2.1 - 3.0	0.161 - 0.165	4.1 - 4.2	0.790	20.0	0.827	21.0	0.315	8.0	2.07
RF190B	0.024 - 0.039	0.6 - 1.0	0.161 - 0.165	4.1 - 4.2	0.551	14.0	0.591	15.0	0.354	9.0	1.53
RF195B	0.039 - 0.079	1.0 - 2.0	0.161 - 0.165	4.1 - 4.2	0.551	14.0	0.591	15.0	0.354	9.0	1.53
RF200B	0.079 - 0.118	2.0 - 3.1	0.161 - 0.165	4.1 - 4.2	0.551	14.0	0.591	15.0	0.354	9.0	1.53
RF205B	0.031 - 0.047	0.8 - 1.2	0.200 - 0.205	5.1 - 5.2	0.551	14.0	0.591	15.0	0.354	9.0	1.53
RF210B	0.059 - 0.087	1.5 - 2.2	0.200 - 0.205	5.1 - 5.2	0.551	14.0	0.591	15.0	0.354	9.0	1.53
RF215B	0.020 - 0.047	0.5 - 1.2	0.142 - 0.146	3.6 - 3.7	0.394	10.0	0.425	10.8	0.157	4.0	1.48
RF220B	0.047 - 0.079	1.2 - 2.0	0.142 - 0.146	3.6 - 3.7	0.394	10.0	0.425	10.8	0.157	4.0	1.48
RF225B	0.059 - 0.087	1.5 - 2.2	0.142 - 0.146	3.6 - 3.7	0.394	10.0	0.425	10.8	0.157	4.0	1.48
RF230B	0.098 - 0.126	2.5 - 3.2	0.142 - 0.146	3.6 - 3.7	0.394	10.0	0.425	10.8	0.157	4.0	1.48
RF235B	0.138 - 0.177	3.5 - 4.5	0.142 - 0.146	3.6 - 3.7	0.394	10.0	0.425	10.8	0.157	4.0	1.42


FBR  
Foot, Fir-Tree Mount



- Rigid nylon fir-tree mount provides exceptional retention strength
- Rubber foot provides skid resistance and vibration control
- Material: Rivet: UL94 V-2 Nylon 6/6
- Foot: TPE
- Color: Black

Item No.	Hole Ø	Min. Panel Thickness	Price Each
FBR-1	.268 (6.8)	.394 (10)	0.47

BPM  
Pull Mount Bumper

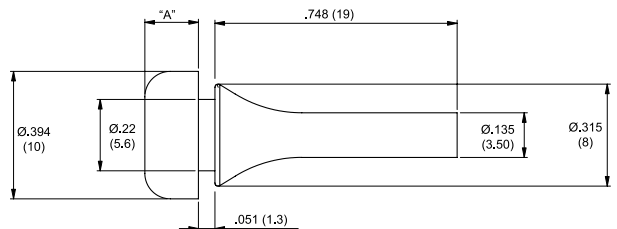


- Pulled from the inside of chassis
- High temperature silicone helps to cushion and prevent skidding
- Material: Silicone Rubber, 65 Shore A

Item No.	Hole Ø	Panel Thickness	"A"	Color	Price Each
BPM-1	.24 - .25 (6 - 6.35)	.059 (1.5)	.118 (3)	Grey	0.31
BPM-2	.24 - .25 (6 - 6.35)	.059 (1.5)	.165 (4.2)	Black	0.39
BPM-3	.24 - .25 (6 - 6.35)	.059 (1.5)	.196 (5)	Black	0.39

STEM BUMPERS


**BAB**  
Break-Away Bumper

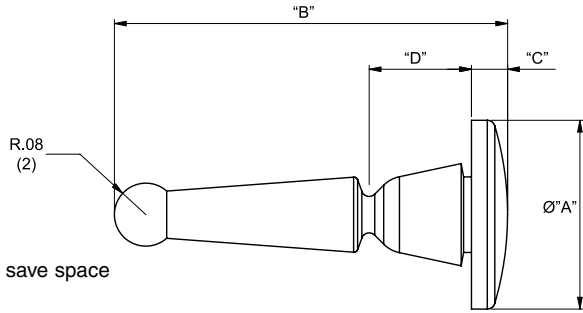

- Designed to be pulled from the inside of the chassis
- Mounting tab designed to break away after assembly to save space
- Silicone is good for high temperature applications
- Color: Black

Item No.	Hole Ø	Panel Thickness	"A" Ø	"B"	"C"	"D"	Material	Price Each
BAB-1	.197-.212 (5.0-5.4)	.024 - .031 (0.6 - 0.8)	.47 (12)	.98 (25)	.09 (2.3)	.26 (6.5)	Silicone Rubber, 40 Shore A, RMS-316	0.19
BAB-2	.197-.212 (5.0-5.4)	.024 - .031 (0.6 - 0.8)	.47 (12)	.98 (25)	.09 (2.3)	.26 (6.5)	Silicone Rubber, 50 Shore A, RMS-364	0.19
BAB-3	.185-.197 (4.7-5)	.020 (0.5)	.39 (10)	.79 (20)	.08 (2)	.16 (4.3)	Silicone Rubber, 50 Shore A, RMS-364	0.19


**BIB**  
Blind Install Bumper

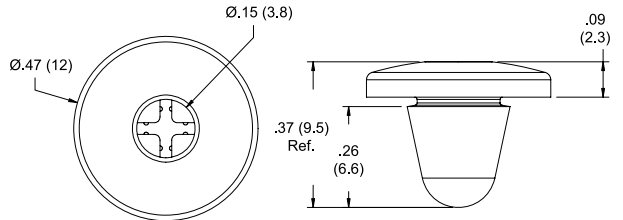

- Installed from the outside of the chassis
- Cross that is molded into the head allows quick installation with a #1 phillips head screwdriver or 1/8 (3.2) Ø or smaller blunt end rod
- May be used as an alternate to the BAB series seen above
- Material: Silicone Rubber, 45 Shore A
- Color: Black

Item No.	Hole Ø	Panel Thickness	Price Each
BIB-1	.197 - .212 (5 - 5.4)	.024 - .031 (1.6 - 0.8)	0.28

**POF**  
Push On Feet

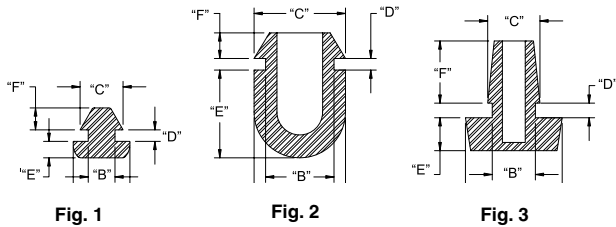


- Easily mounted by pushing into chassis
- Material: UL94 HB TPE
- Color: Black

Item No.	Hole Ø	Panel Thickness	"A" Ø	"B" Ø	"C" Ø	"D"	"E"	"F" Ref.	Fig.	Price Each
POF-40022	.146 - .150 (3.7-3.8)	.126 (3.2)	.31 (7.9)	.126 (3.2)	.17 (4.4)	.13 (3.3)	.06 (1.6)	.13 (3.3)	1	0.35
POF-40048	.177 - .181 (4.5-4.6)	.059 (1.5)	.31 (7.9)	.146 (3.7)	.24 (6.1)	.06 (1.6)	.09 (2.3)	.12 (3)	1	0.30
POF-40059	.374 - .378 (9.5-9.6)	.059 (1.5)	.50 (12.7)	.374 (9.5)	.50 (12.7)	.06 (1.6)	.48 (12.2)	.14 (3.6)	2	0.79
POF-50185	.236 - .240 (6-6.1)	.075 (1.9)	.53 (13.4)	.236 (6)	.29 (7.3)	.08 (2)	.18 (4.6)	.34 (8.6)	3	0.45
POF-12664	.276 - .280 (7-7.1)	.047 (1.2)	.62 (15.7)	.276 (7)	.34 (8.6)	.05 (1.3)	.20 (5.1)	.16 (4.1)	3	0.50

**SOF**  
Screw Mount Feet



- Securely mounted with a screw
- Provides excellent skid resistance
- Material: Neoprene Rubber
- Color: Black

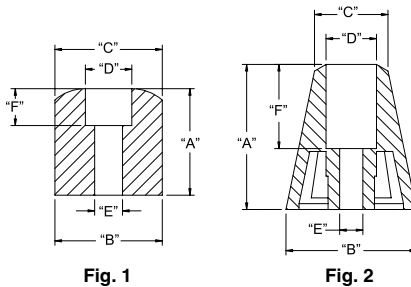


Item No.	"A"	Ø "B"	Ø "C" Ref.	Ø "D"	Ø "E"	"F"	Fig.	Price Each
SOF-15129	.28 (7.1)	.63 (15.9)	.54 (13.8)	.31 (8)	.13 (3.2)	.16 (4)	1	0.82
SOF-15140	.37 (9.5)	.69 (17.5)	-	.31 (8)	.16 (4)	.20 (5.2)	2	0.75
SOF-15125	.45 (11.5)	.75 (19.1)	.71 (18)	.40 (10.2)	.20 (5)	.25 (6.35)	1	1.23
SOF-15111	.60 (15.25)	.75 (19)	.50 (12.7)	.31 (8)	.16 (4)	.19 (4.8)	2	1.23
SOF-15127	.72 (18.35)	.73 (18.5)	-	.31 (8)	.19 (4.8)	.25 (6.35)	1	1.72
SOF-15126	.98 (25)	.89 (22.5)	.50 (12.7)	.34 (8.7)	.16 (4)	.57 (14.5)	2	1.64




**VIBRATION MOUNTS**

**Cupmounts**

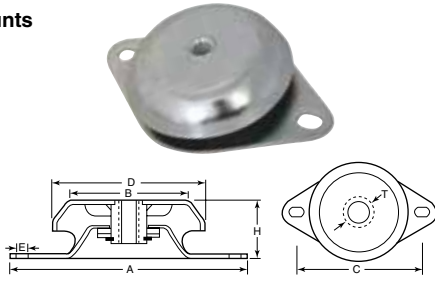

Industrial cupmounts provide excellent protection against severe impact shock, vibration and noise. High vibration dampening characteristics. Fail safe, rugged interlocking metal and neoprene construction. Metal cupmount is cold rolled steel. Low profile compact design. Metal top plate is domed shape to guard against oil contamination. High-grade neoprene elastomer provides resistance to oil and ozone.

**Stainless Steel  
Compression/Shear Mounts for Harsh Environments**





Compression/Shear mounts provide excellent protection against shock vibration and noise in compression and shear applications. Developed specially for applications in harsh working environments in food, pharmaceutical industries, or others where strict hygiene is required. High dampening characteristics. Stainless top plate is dome shaped to guard against oil contamination. Low profile, compact design. Elastomer insert is made from highly chemical resistant nitril with good deflection properties. Concentric rings on the base of the insert firmly anchor machine to the floor.

Item No.	Max. Load in Lbs.		A	B	C	D	E	H	T	Price Each
	Non-Impact Machinery	Impact Machinery								
VP-41	400	250	6	2 1/4	5	3 3/8	.39	1 1/2	1/2-13	68.67
VP-42	700	450	6	2 3/4	5	3 3/8	.39	1 1/2	1/2-13	68.67
VP-43	1,400	900	7 1/16	4	6 3/8	5 1/8	.55	1 1/16	5/8-11	82.40
VP-44	2,600	1,700	7 1/16	4	6 3/8	5 1/8	.55	1 1/16	5/8-11	82.40

Item No.	Max. Load in Lbs.		B	D	H	T	Price Each
	Non-Impact Machinery	Impact Machinery					
VP-31	1,200	800	2 3/4	3 3/8	1 1/2	1/2-13	80.11
VP-33	2,800	1,800	4	5 1/8	1 1/16	5/8-11	100.77

**Pneumatic Elastomeric**




This machinery mount is a pneumatic elastomeric mount, well-suited for applications requiring higher deflection isolators. Vibration can be reduced as much as 90%. The high stability horizontal to vertical stiffness ratio is one-to-one, insuring excellent stability without the need for lateral restraints. Because the heavy wall construction is an integral part of the system, when significant shock forces are applied, the mount deflects and the shock load is transferred to the outer wall. Will not bottom-out if properly installed. Will continue to support and isolate even with no air pressure. Leveling the machine is easily accomplished by adding or releasing air.


Item No.	Load Range Lbs.	A	B	C	D	E	F	G	H	J	K	T	Weight Lbs.	Price Each
SLM-3	100-300	4.19	3.5	.34	1/2-13	.54	.29	4.14	2.5	2.06	1.94	.12	1 1/2	106.82
SLM-6	300-550	5.13	4.25	.44	1/2-13	.54	.29	4.99	3.5	2.38	2.94	.12	3/4	130.33
SLM-12	500-1,200	6.88	6.44	.44	1/2-13	.54	.29	6.74	3.5	3.75	2.94	.12	5/2	174.34
SLM-24	1,200-2,400	10	8.5	.75	5/8-11	.75	.56	9.66	3.5	5.44	2.94	.19	13	253.10
SLM-48	1,200-4,800	13.5	12	.75	5/8-11	.75	.56	13.31	3.5	8	2.94	.19	26	416.30
SLM-96	2,400-9,600	18.5	16	1.25	1-14	.88	.81	18.44	3.5	11.75	2.94	.25	57	1280.30

**Note:** Dimension H +/- 1/4 inch = Inflated loaded height for steady force application

**Natural Rubber  
Inch and Metric**



Single End Male




Double End Male/Male

**EXPANDED LINE** **NEW STAINLESS OFFERING**


Item No.	A	B	C	Approx. D	Thread	Load Lbs.		Price Each	Item No.	A	B	C	Approx. D	Thread	Load Lbs.		Price Each
						Comp.	Shear								Comp.	Shear	
<b>Single End - Male - Inch</b>									<b>Double End - Male/Male - Inch</b>								
VM-184-1	1	1/2	1/2	—	1/4-20	50	15	1.77	VM-47-1	1	3/4	1/2	1/2	1/4-20	50	9	1.70
VM-147-1	1	3/4	1/2	—	1/4-20	50	9	1.81	VM-40	1	3/4	5/8	5/8	1/4-20	40	10	2.06
VM-144-1	1	1	5/8	—	3/8-18	45	8	2.71	VM-474-1	1	3/4	5/8	5/8	5/8-18	50	9	2.11
VM-1249-1	1 1/2	3/4	5/8	—	3/8-18	110	18	2.77	VM-74-1	1	1	1/2	1/2	1/4-20	45	8	2.25
VM-136-1	1 1/16	1	5/8	—	3/8-18	125	20	3.07	1291398	1 1/4	1 1/4	5/8	5/8	5/8-18	70	10	2.57
VM-137-1	1 1/16	1	5/8	—	3/8-16	125	20	3.07	VM-44-1	1	1	5/8	5/8	5/8-18	45	8	2.08
VM-175-1	2	3/4	1 1/8	—	3/8-16	370	90	4.63	VM-48-1	1 1/4	3/4	1/2	1/2	1/4-20	75	12	2.30
VM-165-1	2	1 1/8	5/8	—	3/8-16	165	55	5.12	1291396	1 1/4	3/4	5/8	5/8	5/8-18	75	12	2.43
<b>Double End - Male/Male - Inch - Stainless Steel</b>									<b>VM-50</b>								
1291408	.625	.50	.50	.50	8-32	20	3	7.34	1291400	1 1/8	5/8	5/8	5/8	5/8-16	375	85	3.38
1291409	1	.75	.50	.50	1/4-20	50	9	6.49	VM-42-1	1 1/4	1	5/8	5/8	5/8-18	70	12	2.87
1291410	1	1	.625	.625	3/8-18	45	8	17.34	VM-43-1	1 3/8	1	5/8	5/8	5/8-18	80	15	2.74
1291411	1.25	1.32	.625	.625	3/8-18	70	10	7.13	1291402	2	1 3/8	5/8	5/8	3/8-16	180	46	6.02
1291412	1.375	1	.625	.625	3/8-18	80	15	14.57	1291404	2.5	7/8	1 1/4	1 1/4	3/8-16	560	160	6.79
1291413	1.56	1	.625	.625	3/8-16	125	20	15.00	1291406	3 1/8	1 1/2	1 1/4	1 1/4	1/2-13	668	199	10.85
1291414	2	.75	1.12	1.12	3/8-16	370	90	7.02	VM-60	1 3/8	1	3/4	3/4	5/8-18	75	50	8.99
<b>Double End - Male/Male - Inch</b>									<b>VM-249-1</b>								
VM-80-1	3/8	1/2	1/2	1/2	8-32	7	.75	1.49	VM-70	1 1/2	1	5/8	5/8	5/8-16	125	30	4.47
VM-10	9/16	1/2	3/8	3/8	10-32	8	.25	1.22	VM-36-1	1 1/8	1	5/8	5/8	5/8-18	125	20	3.67
VM-82-1	5/8	1/2	1/2	1/2	8-32	20	3	1.83	VM-37-1	1 1/8	1	5/8	5/8	3/8-16	125	20	3.07
1291392	5/8	5/8	1/2	1/2	1/4-20	31	4.5	1.91	VM-75-1	2	3/4	1 1/8	1 1/8	3/8-16	370	90	5.50
VM-46-1	3/4	3/4	1/2	1/2	1/4-20	40	6	1.83	VM-65-1	2	1 1/8	5/8	5/8	3/8-16	165	55	5.89
VM-20	1	1/2	1/2	1/2	1/4-20	60	20	1.65	VM-78-1	2 1/8	1 1/4	7/8	7/8	1/2-13	450	120	9.18
									VM-72-1	3 1/8	2 1/4	1 1/4	1 1/4	1/2-13	720	140	19.90

VIBRATION MOUNTS

**EXPANDED LINE**  
**NEW STAINLESS OFFERING**



Single End Male



Double End Male/Male




Double End Male/Female




Double End Female/Female



Ring Mounts



Conical Single End Male



Special Purpose

Designed to absorb the transmission of vibration and noise between a piece of equipment and whatever it is mounted on. Made of natural rubber with bonded in studs and inserts. 50 durometer for use up to 150 degrees Fahrenheit. Metric dimensions are in millimeters.

Item No.	A	B	C	Approx. D	Thread	Load Lbs.		Price Each	Item No.	A	B	C	Approx. D	Thread	Load Lbs.		Price Each
						Comp.	Shear								Comp.	Shear	
<b>Double End - Male/Female - Inch - Stainless Steel</b>									<b>Double End - Male/Male - Metric</b>								
1291429	0.625	.50	.50	.25	8-32	20	3	4.89	VM-80-1M	10	13	13	13	M4 x 0.7	7	.75	1.31
1291430	1	.75	.53	.25	1/4-20	50	9	7.45	VM-82-1M	16	13	13	13	M4 x 0.7	20	3	1.68
1291431	1	1	.64	.32	1/4-18	55	8	6.91	VM-46-1M	19	19	13	13	M6 x 1.0	40	6	1.66
1291432	1.25	1.32	.60	.30	3/8-18	70	10	8.72	1291393	5/8	5/8	1/2	1/2	M6 x 1.0	31	4.5	1.91
1291433	1.375	1	.65	.32	3/8-18	80	15	8.83	VM-47-1M	25	19	13	13	M6 x 1.0	50	9	1.57
1291434	1.56	1	.64	.32	3/8-16	125	20	9.04	VM-47-1M	25	19	16	16	M8 x 1.25	50	9	2.08
<b>Double End - Male/Female - Inch</b>									<b>VM-74-1M</b>								
1291417	3/8	1/2	1/2	1/4	8-32	7	3/4	1.81	VM-44-1M	25	25	13	13	M6 x 1.0	45	8	2.05
VM-83-1	5/8	1/2	1/2	0.18	8-32	20	3	2.30	VM-50M	32	19	16	16	M8 x 1.25	60	18	2.29
1291419	5/8	5/8	1/2	1/4	1/4-20	31	4 1/2	2.02	VM-42-1M	32	25	16	16	M8 x 1.25	70	12	2.67
VM-85-1	1	1/2	1/2	0.18	1/4-20	75	25	2.92	1291399	1 1/4	1 1/4	3/8	3/8	M8 x 1.25	70	10	2.57
VM-475-1	1	3/4	1/2	0.18	1/4-20	50	15	2.92	VM-43-1M	35	25	16	16	M8 x 1.25	80	15	2.67
VM-745-1	1	1	1/2	0.18	1/4-20	55	8	2.93	VM-249-1M	38	19	16	16	M8 x 1.25	110	18	2.64
VM-41-1	1	1	3/4	0.20	5/8-18	55	8	2.65	1291397	1 1/4	3/4	3/8	3/8	M8 x 1.25	75	12	2.43
VM-434-1	1 3/8	1	3/4	0.20	5/8-18	80	15	3.42	VM-36-1M	40	25	16	16	M8 x 1.25	125	20	3.44
1291421	1 1/16	1	3/8	3/16	5/8-18	125	20	3.60	1291401	1 1/16	3/8	3/8	3/8	M10 x 1.5	375	85	3.34
1291423	1 1/16	3/8	3/8	3/16	3/8-16	375	85	3.30	VM-37-1M	40	25	16	16	M10 x 1.5	125	20	3.62
1291425	1 1/16	1	3/8	3/16	3/8-16	125	20	3.19	VM-75-1M	51	19	29	29	M10 x 1.5	370	90	5.34
1291427	2	1 3/8	3/8	3/16	3/8-16	192	54	5.85	1291403	2	1 3/8	3/8	3/8	M10 x 1.5	180	46	6.02
VM-66-1	2	1 3/8	3/8	0.45	3/8-16	165	55	6.19	1291405	2.5	7/8	1 1/4	1 1/4	M10 x 1.5	560	160	6.79
VM-77-1	2	2	1 1/4	0.45	3/8-16	165	45	6.78	1291407	3 1/8	1 1/2	1 1/4	1 1/4	M12 x 1.75	668	199	10.85
VM-725-1	3 3/8	2 1/4	1 1/4	0.54	1/2-13	720	140	26.44	VM-72-1M	79	57	35	35	M12 x 1.75	720	140	18.22
<b>Double End - Female/Female - Inch - Stainless Steel</b>									<b>Double End - Male/Female - Metric</b>								
1291382	.625	.50	.20	.125	8-32	20	3	3.94	1291418	3/8	1/2	1/2	1/4	M4 x 0.7	7	3/4	1.81
1291383	1	.75	.20	.20	1/4-20	50	9	18.83	VM-83-1M	16	13	13	5	M4 x 0.7	20	3	2.26
1291384	1	1	.20	.20	3/8-18	55	8	7.77	1291420	5/8	3/8	1/2	1/4	M6 x 1.0	31	4 1/2	2.02
1291385	1.25	1.32	.20	.20	3/8-18	70	10	9.36	VM-85-1M	25	13	13	5	M6 x 1.0	75	25	2.67
1291386	1.375	1	.20	.20	3/8-18	80	15	9.47	VM-475-1M	25	19	13	5	M6 x 1.0	50	15	2.75
1291387	1.56	1	.40	.40	3/8-16	125	20	9.47	VM-745-1M	25	25	13	5	M6 x 1.0	55	8	3.06
<b>Double End - Female/Female - Inch</b>									<b>VM-41-1M</b>								
1291360	3/8	1/2	1/4	1/4	8-32	7	3/4	1.81	VM-434-1M	35	25	16	5	M8 x 1.25	80	15	2.87
VM-87-1	3/8	1/2	0.18	0.18	8-32	25	5	2.52	1291422	1 1/16	1	3/8	3/16	M8 x 1.25	125	20	3.60
1291362	1	1/2	1/2	1/8	1/4-20	210	30	2.87	1291424	1 1/16	3/8	3/8	3/16	M10 x 1.75	375	85	3.30
1291364	1	1	1/4	1/8	1/4-20	55	8	3.30	1291426	1 1/16	1	3/8	3/16	M10 x 1.50	125	20	3.19
VM-40-1	1	1	0.20	0.20	5/8-18	55	8	3.07	1291428	2	1 1/8	3/8	3/16	M10 x 1.50	180	46	5.85
VM-35-1	1 1/2	1	0.20	0.20	5/8-18	170	40	5.01	VM-66-1M	51	41	16	11	M10 x 1.50	165	55	6.07
1291366	2	1 3/8	0.365	0.365	3/8-16	192	54	6.17	VM-77-1M	51	51	29	11	M10 x 1.50	165	45	6.38
VM-64-1	2	1 3/8	0.45	0.45	3/8-16	165	55	7.31	VM-725-1M	79	57	32	14	M12 x 1.75	720	140	25.02
1291368	3 3/8	2 1/4	0.53	0.53	1/2-13	720	140	12.98	<b>Double End - Female/Female - Metric</b>								
1291370	2	1 1/2	0.43	0.43	1/2-13	185	65	7.98	1291361	3/8	1/2	1/4	5	M4 x 0.7	7	3/4	1.81
1291372	2	1 1/2	0.43	0.43	1/2-13	370	125	7.98	VM-87-1M	16	13	5	5	M4 x 0.7	25	5	2.29
1291374	2	1 3/4	0.43	0.43	1/2-13	100	35	8.30	1291363	1	1/2	1/2	1/2	M6 x 1.0	210	30	2.87
1291376	2	1 3/4	0.43	0.43	1/2-13	210	90	8.30	1291365	1	1	1/2	1/2	M6 x 1.0	55	8	3.30
1291378	2	2 1/8	0.43	0.43	1/2-13	90	25	8.72	VM-40-1M	25	25	5	5	M8 x 1.25	55	8	3.18
1291380	2	2 1/8	0.43	0.43	1/2-13	210	70	8.72	VM-35-1M	38	25	5	5	M8 x 1.25	170	40	4.88
<b>Conical Single End - Male - Inch</b>									<b>1291367</b>								
VM-130-1	1 1/16	1 1/2	1 1/2	3/8	5/8-18	75	—	2.30	VM-64-1M	51	41	11	11	M10 x 1.50	165	55	7.19
VM-133-1	1 1/16	1	1	3/8	5/8-18	80	—	3.02	1291369	3 1/8	2 1/4	0.53	0.53	M12X1.75	720	140	12.98
<b>Rings Mounts - Inch</b>									<b>1291371</b>								
1291516	.56	.57	.28	.50	6-32	—	.080	5.32	1291372	2	1 1/2	0.43	0.43	1/2-13	265	90	7.98
1291517	.56	.57	.28	.50	6-32	—	.060	5.32	1291373	2	1 1/2	0.43	0.43	1/2-13	560	200	7.98
1291518	.82	.69	.34	.62	10-32	—	.160	6.28	1291375	2	1 3/4	0.43	0.43	1/2-13	150	60	8.30
1291519	.82	.69	.34	.62	10-32	—	.120	6.28	1291377	2	1 3/4	0.43	0.43	1/2-13	310	140	8.30
1291520	1.10	.96	.53	.75	1/4-20	—	.150	7.13	1291379	2	2 1/8	0.43	0.43	1/2-13	130	45	8.72
1291521	1.10	.96	.53	.75	1/4-20	—	.115	7.13	1291381	2	2 1/8	0.43	0.43	1/2-13	310	100	8.72
1291522	1.69	1.70	.75	.94	3/8-18	—	.200	7.77	<b>Conical Single End - Male - Metric</b>								
1291523	1.69	1.70	.75	.94	3/8-18	—	.150	7.77	VM-130-1M	30	38	38	16	M8 x 1.25	75	—	2.41
<b>Special Purpose - Inch</b>									<b>VM-133-1M</b>								
VM-171-1	1 1/16	0.65	1/4	1/2	1/4-20	20	—	1.49	35	25	25	16	M8 x 1.25	80	—	2.55	
<b>Single End - Male - Metric</b>									<b>Special Purpose - Metric</b>								
VM-184-1M	25	13	13	-	M6 x 1.0	50	15	1.83	VM-171-1M	24	17	6	13	M6 x 1.0	20	—	1.28
VM-147-1M	25	19	13	-	M6 x 1.0	50	9	1.68									
VM-144-1M	25	25	16	-	M8 x 1.25	45	8	1.83									
VM-1249-1M	38	19	16	-	M8 x 1.25	110	18	2.43									
VM-136-1M	40	25	16	-	M8 x 1.25	125	20	3.03									
VM-137-1M	40	25	16	-	M10 x 1.5	125	20	3.03									
VM-175-1M	51	19	29	-	M10 x 1.5	370	90	4.48									
VM-165-1M	51	41	16	-	M10 x 1.5	165	55	5.06									



VIBRATION MOUNTS


Buy One or Buy Bulk & SAVE!



Natural Rubber/Steel  
Metric




Style A



NEW




Style B



NEW



Style C




NEW

Designed to absorb the transmission of noise between a piece of equipment and whatever it is mounted on. Made of natural rubber. 55 Shore A durometer. All dimensions are in millimeters. Effective tempurate range -22°F to +176°F.

Item No.	D	G	H	L	T	Spring Stiffness N/mm	Load N	Price Each	Item No.	D	G	H	L	T	Spring Stiffness N/mm	Load N	Price Each
<b>Style A</b>									<b>Style C</b>								
1290868	8.0	M3 x .5	8.0	6.0	-	24.0	31	2.84	1290910	20.0	M6 x 1	20.0	18.0	6.0	130	260	3.07
1290869	10.0	M4 x .7	10.0	10.0	-	35.0	32	2.84	1290911	20.0	M6 x 1	25.0	18.0	6.0	95	210	3.56
1290870	10.0	M4 x .7	15.0	10.0	-	50.0	50	2.84	1290912	25.0	M6 x 1	15.0	18.0	6.0	333	399	3.58
1290871	15.0	M4 x .7	8.0	10.0	-	130.0	104	2.84	1290913	25.0	M6 x 1	20.0	18.0	6.0	195	410	3.84
1290872	15.0	M4 x .7	10.0	10.0	-	122.0	122	2.71	1290914	25.0	M6 x 1	25.0	18.0	6.0	117	257	3.84
1290873	15.0	M4 x .7	15.0	10.0	-	59.0	88	2.84	1290915	25.0	M6 x 1	30.0	18.0	6.0	100	300	4.18
1290874	20.0	M6 x 1	8.0	18.0	-	725.0	580	3.04	1290916	30.0	M8 x 1.25	15.0	23.0	8.0	590	708	4.29
1290875	20.0	M6 x 1	10.0	18.0	-	300.0	300	3.04	1290917	30.0	M8 x 1.25	20.0	23.0	8.0	280	560	4.58
1290876	20.0	M6 x 1	15.0	18.0	-	200.0	300	3.04	1290918	30.0	M8 x 1.25	25.0	23.0	8.0	180	396	4.56
1290877	20.0	M6 x 1	20.0	18.0	-	133.0	332	3.04	1290919	30.0	M8 x 1.25	30.0	23.0	8.0	168	504	4.98
1290878	20.0	M6 x 1	25.0	18.0	-	90.0	270	3.04	1290920	30.0	M8 x 1.25	40.0	23.0	8.0	88	308	5.11
1290879	25.0	M6 x 1	10.0	18.0	-	800.0	800	3.24	1290921	40.0	M8 x 1.25	20.0	23.0	8.0	700	840	6.31
1290880	25.0	M6 x 1	15.0	18.0	-	294.0	441	3.24	1290922	40.0	M8 x 1.25	30.0	23.0	8.0	273	820	6.29
1290881	25.0	M6 x 1	20.0	18.0	-	200.0	500	3.33	1290923	40.0	M8 x 1.25	40.0	23.0	8.0	189	660	7.42
1290882	25.0	M6 x 1	25.0	18.0	-	94.0	282	3.33	1290924	50.0	M10 x 1.50	20.0	28.0	10.0	1471	2500	8.09
1290883	25.0	M6 x 1	30.0	18.0	-	70.0	280	3.60	1290925	50.0	M10 x 1.50	25.0	28.0	10.0	630	1386	8.16
1290884	30.0	M8 x 1.25	15.0	23.0	-	587.0	880	3.87	1290926	50.0	M10 x 1.50	30.0	28.0	10.0	545	1635	8.16
1290885	30.0	M8 x 1.25	20.0	23.0	-	318.0	795	4.04	1290927	50.0	M10 x 1.50	40.0	28.0	10.0	310	1116	8.18
1290886	30.0	M8 x 1.25	25.0	23.0	-	183.0	549	4.04	1290928	50.0	M10 x 1.50	50.0	28.0	10.0	180	900	9.31
1290887	30.0	M8 x 1.25	30.0	23.0	-	150.0	600	4.42	1290929	60.0	M10 x 1.50	40.0	28.0	10.0	500	1750	12.09
1290888	30.0	M8 x 1.25	40.0	23.0	-	77.0	385	4.56	1290930	70.0	M10 x 1.50	45.0	28.0	10.0	600	2400	15.62
1290889	40.0	M8 x 1.25	15.0	23.0	-	1250.0	1875	4.33	1290931	75.0	M12 x 1.75	25.0	37.0	12.0	2440	3660	13.04
1290890	40.0	M8 x 1.25	20.0	23.0	-	565.0	1412	5.42	1290932	75.0	M12 x 1.75	40.0	37.0	12.0	700	2450	15.96
1290891	40.0	M8 x 1.25	30.0	23.0	-	300.0	1200	6.04	1290933	75.0	M12 x 1.75	50.0	37.0	12.0	520	2600	17.84
1290892	40.0	M8 x 1.25	40.0	23.0	-	189.0	945	6.60	1290934	75.0	M12 x 1.75	55.0	37.0	12.0	396	2178	18.80
1290893	50.0	M10 x 1.50	20.0	28.0	-	1300.0	3250	7.53	<b>Style B</b>								
1290894	50.0	M10 x 1.50	25.0	28.0	-	667.0	2000	8.40	1290935	10.0	M4 x .7	10.0	-	4.0	100	50	2.13
1290895	50.0	M10 x 1.50	30.0	28.0	-	500.0	2000	8.67	1290936	10.0	M4 x .7	15.0	-	4.0	50	50	2.47
1290896	50.0	M10 x 1.50	4.0	28.0	-	300.0	1500	9.09	1290937	15.0	M4 x .7	15.0	-	4.0	100	100	2.33
1290897	50.0	M10 x 1.50	50.0	28.0	-	193.0	1153	10.02	1290938	20.0	M6 x 1	20.0	-	6.0	230	276	3.31
1290898	60.0	M10 x 1.50	40.0	28.0	-	377.0	1885	12.47	1290939	20.0	M6 x 1	25.0	-	6.0	120	180	2.80
1290899	70.0	M10 x 1.50	45.0	28.0	-	410.0	2255	16.22	1290940	25.0	M6 x 1	20.0	-	6.0	230	276	3.29
1290900	75.0	M12 x 1.75	25.0	37.0	-	1655.0	4965	14.36	1290941	25.0	M6 x 1	25.0	-	6.0	110	165	3.60
1290901	75.0	M12 x 1.75	40.0	37.0	-	717.0	3585	16.67	1290942	25.0	M6 x 1	30.0	-	6.0	80	160	3.51
1290902	75.0	M12 x 1.75	50.0	37.0	-	470.0	2820	18.73	1290943	30.0	M8 x 1.25	20.0	-	8.0	425	637	4.04
1290903	75.0	M12 x 1.75	55.0	37.0	-	405.0	2835	19.80	1290944	30.0	M8 x 1.25	30.0	-	8.0	175	350	4.84
<b>Style B</b>									1290945	30.0	M8 x 1.25	40.0	-	8.0	133	400	5.47
1290904	8.0	M3 x .5	8.0	6.0	3.0	35	17	2.62	1290946	40.0	M8 x 1.25	30.0	-	8.0	530	1060	6.20
1290905	10.0	M4 x .7	10.0	10.0	4.0	75	75	2.62	1290947	40.0	M8 x 1.25	40.0	-	8.0	222	666	6.98
1290906	10.0	M4 x .7	15.0	10.0	4.0	50	60	2.93	1290948	50.0	M10 x 1.50	30.0	-	10.0	680	1360	8.62
1290907	15.0	M4 x .7	10.0	10.0	4.0	130	130	2.84	1290949	50.0	M10 x 1.50	40.0	-	10.0	333	1000	9.22
1290908	15.0	M4 x .7	15.0	10.0	4.0	100	120	2.93	1290950	50.0	M10 x 1.50	50.0	-	10.0	190	665	10.44
1290909	20.0	M6 x 1	15.0	18.0	6.0	325	390	3.07	1290951	75.0	M12 x 1.75	40.0	-	12.0	750	2250	16.58
									1290952	75.0	M12 x 1.75	50.0	-	12.0	636	2225	18.62



Natural Rubber/Steel  
Metric

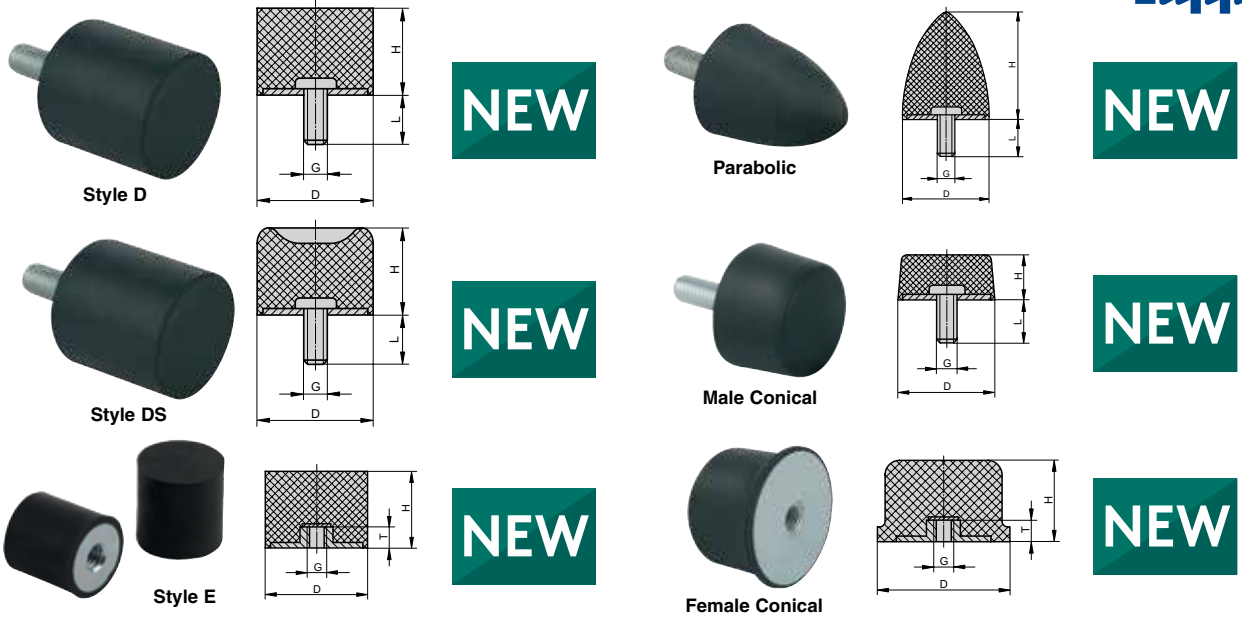


Designed to absorb the transmission of noise between a piece of equipment and whatever it is mounted on. Made of natural rubber. 55 Shore A durometer. All dimensions are in millimeters. Effective temperature range -22°F to +176°F.

Item No.	D	G	H	L	T	Spring Stiffness N/mm	Load N	Price Each	Item No.	D	G	H	L	T	Spring Stiffness N/mm	Load N	Price Each
<b>Style D</b>									<b>Style E</b>								
1290953	8.0	M3 x .5	8.0	6.0	-	40	40	2.00	1291000	8.0	M3 x .5	8.0	-	3.0	88	44	4.13
1290954	10.0	M4 x .7	10.0	10.0	-	35	35	2.00	1291001	15.0	M4 x .7	12.0	-	4.0	165	182	4.29
1290955	10.0	M4 x .7	15.0	10.0	-	26	40	2.09	1291002	15.0	M4 x .7	15.0	-	4.0	100	130	4.29
1290956	15.0	M4 x .7	6.0	10.0	-	175	88	2.00	1291003	15.0	M4 x .7	20.0	-	4.0	75	113	4.73
1290957	15.0	M4 x .7	8.0	10.0	-	187	187	2.09	1291004	20.0	M6 x 1	15.0	-	6.0	145	246	4.98
1290958	15.0	M4 x .7	10.0	10.0	-	100	100	2.22	1291005	20.0	M6 x 1	20.0	-	6.0	94	216	5.33
1290959	15.0	M4 x .7	15.0	10.0	-	50	100	2.33	1291006	20.0	M6 x 1	25.0	-	6.0	65	169	5.62
1290960	20.0	M6 x 1	5.0	18.0	-	135	95	2.33	1291007	25.0	M6 x 1	15.0	-	6.0	270	540	5.42
1290961	20.0	M6 x 1	8.0	18.0	-	250	250	2.47	1291008	25.0	M6 x 1	25.0	-	6.0	105	315	5.62
1290962	20.0	M6 x 1	10.0	18.0	-	240	240	2.62	1291009	25.0	M6 x 1	30.0	-	6.0	85	281	6.09
1290963	20.0	M6 x 1	15.0	18.0	-	110	220	2.84	1291010	25.0	M6 x 1	40.0	-	6.0	75	300	6.87
1290964	20.0	M6 x 1	20.0	18.0	-	75	225	2.93	1291011	30.0	M8 x 1.25	15.0	-	8.0	545	491	6.18
1290965	20.0	M6 x 1	25.0	18.0	-	65	227.5	3.04	1291012	30.0	M8 x 1.25	25.0	-	8.0	160	416	6.47
1290966	25.0	M6 x 1	8.0	18.0	-	850	850	2.62	1291013	30.0	M8 x 1.25	30.0	-	8.0	125	425	6.62
1290967	25.0	M6 x 1	10.0	18.0	-	400	400	2.62	1291014	30.0	M8 x 1.25	40.0	-	8.0	85	315	8.16
1290968	25.0	M6 x 1	15.0	18.0	-	210	420	2.84	1291015	40.0	M8 x 1.25	20.0	-	8.0	550	660	10.51
1290969	25.0	M6 x 1	20.0	18.0	-	140	420	3.07	1291016	40.0	M8 x 1.25	25.0	-	8.0	500	1000	10.89
1290970	25.0	M6 x 1	25.0	18.0	-	100	350	3.33	1291017	40.0	M8 x 1.25	30.0	-	8.0	300	870	11.24
1290971	25.0	M6 x 1	30.0	18.0	-	79	316	3.56	1291018	40.0	M8 x 1.25	40.0	-	8.0	260	1040	11.64
1290972	30.0	M8 x 1.25	15.0	23.0	-	270	540	3.93	1291019	50.0	M10 x 1.50	20.0	-	10.0	860	860	11.07
1290973	30.0	M8 x 1.25	20.0	23.0	-	238	714	3.76	1291020	50.0	M10 x 1.50	25.0	-	10.0	700	1400	11.24
1290974	30.0	M8 x 1.25	25.0	23.0	-	153	535.5	3.84	1291021	50.0	M10 x 1.50	30.0	-	10.0	450	1575	11.64
1290975	30.0	M8 x 1.25	30.0	23.0	-	127	805	4.96	1291022	50.0	M10 x 1.50	40.0	-	10.0	350	1400	12.93
1290976	30.0	M8 x 1.25	40.0	23.0	-	88	825	4.93	1291023	50.0	M10 x 1.50	50.0	-	10.0	170	850	14.69
1290977	40.0	M8 x 1.25	15.0	23.0	-	710	1420	5.42	1291024	60.0	M10 x 1.50	30.0	-	10.0	700	1400	21.11
1290978	40.0	M8 x 1.25	20.0	23.0	-	365	1095	4.84	1291025	60.0	M10 x 1.50	40.0	-	10.0	400	1600	22.16
1290979	40.0	M8 x 1.25	30.0	23.0	-	205	820	6.11	1291026	60.0	M10 x 1.50	50.0	-	10.0	240	1200	23.24
1290980	40.0	M8 x 1.25	40.0	23.0	-	143	858	6.53	1291027	70.0	M10 x 1.50	42.0	-	10.0	520	2600	26.09
1290981	50.0	M10 x 1.50	20.0	28.0	-	646	1938	5.96	1291028	70.0	M10 x 1.50	45.0	-	10.0	680	3060	26.58
1290982	50.0	M10 x 1.50	30.0	28.0	-	354	1416	6.58	1291029	75.0	M12 x 1.75	25.0	-	12.0	1211	1816	25.58
1290983	50.0	M10 x 1.50	40.0	28.0	-	230	1380	6.84	1291030	75.0	M12 x 1.75	30.0	-	12.0	1090	2289	27.27
1290984	50.0	M10 x 1.50	50.0	28.0	-	160	1280	7.96	1291031	75.0	M12 x 1.75	40.0	-	12.0	500	2000	29.91
1290985	60.0	M10 x 1.50	40.0	28.0	-	317	1902	10.64	1291032	75.0	M12 x 1.75	50.0	-	12.0	550	2750	30.67
1290986	70.0	M10 x 1.50	25.0	28.0	-	980	3430	11.89	<b>Parabolic</b>								
1290987	70.0	M10 x 1.50	45.0	28.0	-	438	3066	12.36	1291033	20.0	M6 x 1	24.0	18.0	-	14	500	2.71
1290988	75.0	M12 x 1.75	25.0	37.0	-	1318	4613	12.09	1291034	30.0	M8 x 1.25	36.0	20.0	-	15	750	4.04
1290989	75.0	M12 x 1.75	40.0	37.0	-	643	3858	13.18	1291035	35.0	M8 x 1.25	40.0	20.0	-	-	-	5.24
1290990	75.0	M12 x 1.75	50.0	37.0	-	472	3776	15.20	1291036	50.0	M10 x 1.50	58.0	28.0	-	30	3000	12.31
1290991	75.0	M12 x 1.75	55.0	37.0	-	310	3100	16.20	1291037	50.0	M8 x 1.25	67.0	38.0	-	30	3200	12.93
<b>Style DS</b>									1291038	75.0	M12 x 1.75	89.0	37.0	-	50	8000	17.07
1290992	15.0	M4 x .7	14.0	13.0	-	50	100	2.16	<b>Male Conical</b>								
1290993	25.0	M6 x 1	18.5	18.0	-	95	285	2.53	1291039	25.0	M6 x 1	17.0	18.0	-	3.7	678	3.47
1290994	30.0	M8 x 1.25	28.5	23.0	-	97	340	3.71	1291040	50.0	M10 x 1.50	18.0	28.0	-	4	3600	7.96
1290995	40.0	M8 x 1.25	28.0	23.0	-	120	480	5.20	<b>Female Conical</b>								
1290996	50.0	M10 x 1.50	28.0	28.0	-	220	990	12.47	1291041	50	M10 x 1.50	35.0	-	10.0	15	3000	7.82
1290997	70.0	M10 x 1.50	30.0	28.0	-	360	2160	21.56	1291042	80	M12 x 1.75	60.0	-	12.0	30	11000	14.51
1290998	75.0	M12 x 1.75	37.0	37.0	-	390	3510	22.84	1291043	125	M16 x 2	90.0	-	16.0	40	20000	48.78
1290999	100.0	M16 x 2	50.0	42.0	-	540	8100	30.62									

VIBRATION MOUNTS


Rectangular Mounts

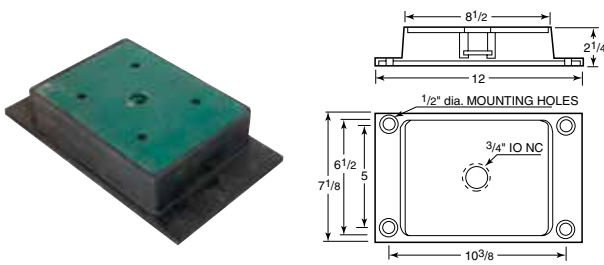

Consists of rectangular elastomer component bonded with two steel plates. Low installation height provides good stability. Effectively isolates against horizontal and vertical vibrations. Has high deflection capacity in horizontal direction while deflection is low in vertical. Oil and grease resistant. Meets OSHA anchoring standards. Ideally suited for presses, blowers, pumps, vibrators, rolling mills, crushers, etc.

Item No.	Max. Load Lbs.	Price Each
VP-20	10,000	252.10
VP-25	15,000	252.10

Industrial Cupmounts

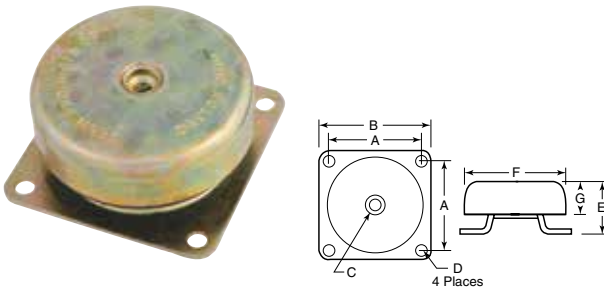

Cupmounts combine protection against severe impact shock with efficient vibration isolation characteristics at frequencies above 40Hz. Can be mounted in any orientation for protection of sensitive electronic, electrical and mechanical equipment from high impact shocks.

Item No.	Load Range Lbs.	A	B	C	D	Approx. E	F	G	Price Each
BCM-1010	10-20	1.94	2.38	1/4-20	.196	1.13	2.28	.69	19.71
BCM-1015	20-40	1.94	2.38	1/4-20	.196	1.13	2.28	.69	19.71
BCM-1035	35-70	1.94	2.38	1/4-20	.196	1.13	2.28	.69	19.71
BCM-1050	70-140	1.94	2.38	1/4-20	.196	1.13	2.28	.69	19.71
BCM-2060	50-150	2.50	3.00	3/8-16	.266	1.50	3.00	1.00	29.42
BCM-2090	90-250	2.50	3.00	3/8-16	.266	1.50	3.00	1.00	29.42

Neoprene Pad Mounts




Ribbed



Waffle

Provides a versatile, inexpensive way to isolate shock, vibration and reduce noise levels. Simply lift the machine and slide the pads under each foot. They provide firm footing to both floor and equipment. Ribbed pads allow them to be stacked with the ribs at 90 degree angles to each other or nested rib in groove. Ribbed pads are scored in 2" squares for easy cutting. Oil resistant.


Vibro-Insulator Strips

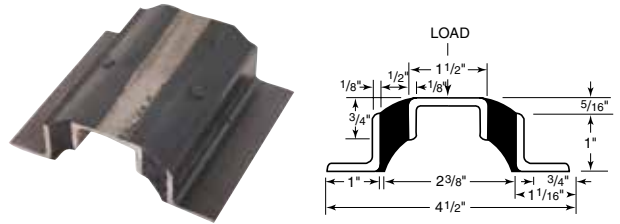

A continuous strip that has rubber elements. Elastomer is 50 durometer neoprene. Maximum recommended deflection is 3/16 inch which occurs at 50 lbs. per linear inch. Available in 4 inch, 12 inch, 24 inch and 30 inch lengths. Can be cut to meet your applications.

Item No.	Lgth.	Max. Load Lbs.	Price Each
VM-104	4	200	32.87
VM-112	12	600	53.18
VM-124	24	1,200	79.15
VM-130	30	1,500	108.86

Compression Mounts

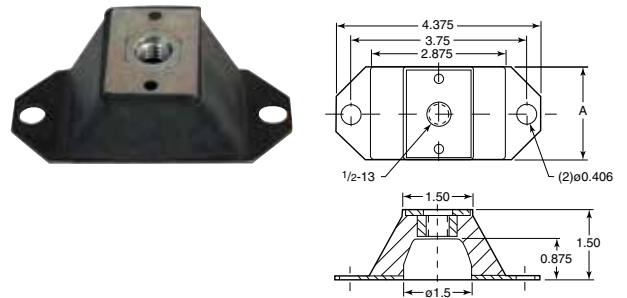

These mounts are normally used for vertically applied loads to prevent the transmission of noise and vibration caused by rotation of imbalanced equipment. Made with durable oil and ozone resistant neoprene. No special tools required for installation.

Item No.	Load Range Lbs.	A	Price Each
BCM-60	40-60	2	17.01
BCM-100	50-100	2	17.01
BCM-130	60-130	2	17.01
BCM-200	80-200	4	22.10
BCM-260	110-260	4	22.10


\*50 psi when two pieces are nested together

VIBRATION MOUNTS

Elastomer bumpers provide excellent resistance to chemicals and humidity. Durability is 20 times greater than urethane, 10 times greater than rubber and 500 times greater than coiled steel springs. Maintains excellent resilience at extreme temperatures and remains flexible with no material degradation between -80 and +300 degree Fahrenheit. Mounting screws not included.

**High Energy Absorption  
High Compact Size, Short Stroke**


Item No.	Max. Comp. In. Lbs.	Peak Dynamic Force	A	B	C	D	E	F	Mounting Hole	Wrench Opening G	Price Each
GBA-1	100	700	3/4	7/16	1 1/8	7/8	3/4	5/16	7/16	8.97	
GBA-2	250	1,200	1	9/16	1 1/4	1 1/8	1	5/16	9/16	9.86	
GBA-3	400	2,000	1 1/16	1 1/16	1 3/4	1 3/8	1 1/16	5/16	1 1/16	20.00	
GBA-4	550	2,400	1 1/16	1 1/16	1 7/8	1 1/2	1 1/16	5/16	3/4	20.27	
GBA-5	700	2,500	1 3/16	1 3/16	2	1 9/16	1 3/16	5/16	13/16	23.74	
GBA-6	900	3,600	1 1/2	1 3/16	2 3/16	1 11/16	1 1/2	7/16	13/16	26.54	
GBA-7	1,100	3,300	1 5/8	1 5/8	2 3/8	1 7/8	1 5/8	9/16	1 5/16	28.61	
GBA-8	1,400	3,800	1 3/4	1	2 1/2	2	1 3/4	9/16	1	33.04	
GBA-9	1,700	6,000	1 7/8	1	2 1/16	2 1/16	1 7/8	9/16	1 1/16	35.12	
GBA-10	2,000	5,000	2 1/16	1 1/8	2 1/8	2 1/8	2	9/16	1 3/16	38.63	
GBA-11	2,500	5,300	2 3/16	1 3/16	3 1/16	2 7/16	2 1/8	9/16	1 1/4	40.95	
GBA-12	3,000	6,100	2 5/16	1 5/16	3 3/16	2 9/16	2 1/4	9/16	1 5/16	45.36	
GBA-13	3,600	6,600	2 3/4	1 1/4	3 3/4	2 1/16	2 3/8	9/16	1 3/8	53.29	
GBA-14	4,000	7,500	2 3/4	1 7/8	3 3/8	2 7/8	2 1/2	1 3/16	1 7/8	57.23	
GBA-16	6,000	8,700	2 15/16	1 3/4	4 1/8	3 3/8	2 1/2	1 3/16	1 11/16	68.40	
GBA-19	10,000	14,000	3 1/16	1 5/8	4 7/8	3 3/8	3 3/8	1 3/16	1 5/8	85.61	
GBA-20	17,000	18,500	3 3/8	2 1/8	5 3/4	4 3/8	3 15/16	1 3/16	2 1/4	110.29	

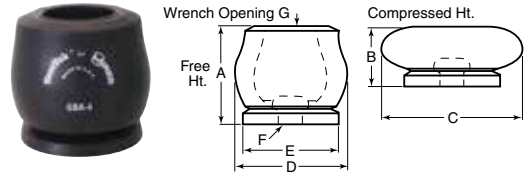

**Medium Energy Absorption  
Low Reaction Force**

Item No.	Max. Comp. In. Lbs.	Peak Dynamic Force	A	B	C	D	E	F	Mounting Hole	Wrench Opening G	Price Each
GBA-101S	50	300	13/16	7/16	1 1/8	1 3/16	3/4	5/16	1/2	10.25	
GBA-102S	100	400	1 1/16	9/16	1 1/4	1 1/8	1	5/16	5/8	10.93	
GBA-103S	200	600	1 1/4	1 1/4	1 3/4	1 1/4	1 3/16	5/16	3/4	20.00	
GBA-104S	250	700	1 1/2	1 1/4	1 7/8	1 3/8	1 3/16	5/16	7/8	23.72	
GBA-105S	300	900	1 5/8	1 3/4	2	1 1/2	1 3/16	7/16	1 3/16	23.99	
GBA-107S	550	1,300	1 3/4	1 5/8	2 3/8	1 3/4	1 5/8	9/16	1	28.85	
GBA-108S	700	1,600	1 7/8	1	2 1/16	1 3/4	1 3/4	9/16	1 1/16	33.49	


**Low Energy Absorption  
Longer Stroke, Soft Stop**



Item No.	Max. Comp. In. Lbs.	Peak Dynamic Force	A	B	C	D	E	F	Mounting Hole	Price Each
GBR-1	10	75	1	3/8	1 1/16	1/2	7/32	1 1/8	7/32	7.01
GBR-2	20	100	1 1/4	1/2	1 1/8	3/4	7/32	1 1/16	7/32	7.70
GBR-3	30	150	1 1/2	9/16	2 1/4	1 3/16	7/32	1 1/16	7/32	11.87
GBR-4	50	200	1 1/16	7/16	2 1/16	1 3/8	7/32	1 1/16	7/32	12.54
GBR-5	100	300	2 1/8	9/16	3 3/8	1 3/4	7/32	2 1/8	7/32	15.05
GBR-6	200	475	2 1/4	1 3/16	3 7/16	1 13/16	7/32	2 1/2	7/32	18.37
GBR-7	300	600	2 5/8	1 1/8	3 1/16	1 13/16	9/32	3	9/32	24.36
GBR-8	400	725	2 3/16	1 3/16	4 1/4	2	9/32	3 1/4	9/32	30.27

**Bonded Mounts**


These one piece mounts protect against shock and vibration. Designed for multi-directional vibration isolation, shock attenuation and noise reduction due to structure borne vibrations. These one piece, fail safe mounts (when used with recommended snubbing washers) are easy to install and provide consistent performance. The resilient material is natural rubber. Core is steel. Temperature range is -40 to +180 degree Fahrenheit and is ozone resistant. The use of the snubbing washers listed below is recommended to ensure proper static and dynamic loading of the isolator and the supported equipment under severe shock environments. Snubbing washers are made from low carbon steel with zinc plate. Bolt not included with mount. Recommended bolt grade 8 or better.

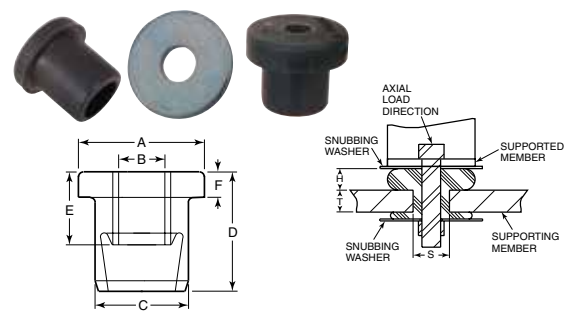

See pages 564-567 for socket head cap screws.

Mount	Head Washer	Tail Washer	Max. Static Load Lbs.	A	B	C	D	E	F	H	S	T	Bolt Size			
BBM-5	4.67	BBM-105	2.95	BBM-135	2.69	75	1.09	.4	.81	1.02	.62	.22	.21	.75	.31	9/8
BBM-10	4.67	BBM-105	2.95	BBM-135	2.69	125	1.09	.4	.81	1.02	.62	.22	.21	.75	.31	9/8
BBM-15	6.81	BBM-110	3.36	BBM-140	3.14	250	1.75	.532	1.24	1.25	1	.41	.38	1.12	.38	1/2
BBM-20	6.81	BBM-110	3.36	BBM-140	3.14	450	1.75	.532	1.24	1.25	1	.41	.38	1.12	.38	1/2
BBM-25	8.41	BBM-115	3.72	BBM-145	3.36	350	2	.532	1.35	1.62	1.31	.53	.45	1.25	.62	1/2
BBM-30	8.41	BBM-115	3.72	BBM-145	3.36	600	2	.532	1.35	1.62	1.31	.53	.45	1.25	.62	1/2
BBM-35	10.66	BBM-120	4.20	BBM-150	3.89	500	2.5	.648	1.62	2	1.69	.62	.56	1.5	.75	5/8
BBM-40	10.66	BBM-120	4.20	BBM-150	3.89	1,000	2.5	.648	1.62	2	1.69	.62	.56	1.5	.75	5/8
BBM-50	13.86	BBM-125	7.90	BBM-155	3.96	1,400	2.98	.648	1.98	2.22	2	.81	.71	1.81	.93	5/8
BBM-60	23.34	—	—	BBM-160	7.56	1,400	3.74	.803	2.23	2.48	2	1	.75	2	.94	3/4


**Center Bonded Mounts  
Two Piece - Neoprene**




Designed for heavy duty applications where there are dynamic forces in multiple directions. These are two-piece installed through a mounting hole in a support structure. The mounts are fail safe when used with snubbing washers. Snubbing washers not supplied. 50 durometer.

Item No.	Support Structure	Max. Deflector (Lbs.)		A	B	C	D	E	F	G	H	R	Price Each
		Axial	Radial										
1291437	.38	50	35	1.31	1.25	.485	.485	.38	.58	.79	.39	.04	4.13
VM-190-2	.38	90	55	1.31	1.25	.485	.485	.38	.58	.79	.39	.04	5.45
1291438	.38	130	80	1.31	1.25	.485	.485	.38	.58	.79	.39	.04	4.13
1291439	.38	200	120	1.31	1.25	.485	.485	.38	.58	.79	.39	.04	4.13
1291440	.5	110	60	1.88	1.94	.78	.78	.5	.83	1.3	.531	.06	6.45
VM-190-3	.5	150	80	1.88	1.94	.78	.78	.5	.83	1.3	.53	.06	7.62
1291441	.5	200	120	1.88	1.94	.78	.78	.5	.83	1.3	.531	.06	6.45
1291442	.5	380	210	1.88	1.94	.78	.78	.5	.83	1.3	.531	.06	6.45
1291443	.75	220	130	2.55	2.45	.9	.9	.75	.97	1.58	.657	.09	12.00
VM-190-4	.75	280	180	2.55	2.45	.9	.9	.75	.97	1.58	.657	.09	11.97
1291444	.75	380	280	2.55	2.45	.9	.9	.75	.97	1.58	.657	.09	12.00
1291445	.75	640	390	2.55	2.45	.9	.9	.75	.97	1.58	.657	.09	12.00
1291446	1	230	150	3.5	2.9	1	1	1	1.37	2.3	.938	.12	24.57
VM-190-5	1	430	210	3.5	2.9	1	1	1	1.37	2.3	.938	.12	18.81
1291447	1	680	370	3.5	2.9	1	1	1	1.37	2.3	.938	.12	24.57
1291448	1	920	500	3.5	2.9	1	1	1	1.37	2.3	.938	.12	24.57

**Step 1: Determine Tube Size = Actual O.D. of Tubing**

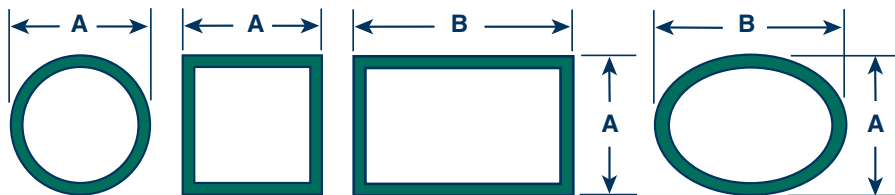

**Step 2: Determine the Wall Thickness to Determine Tube Gauge**

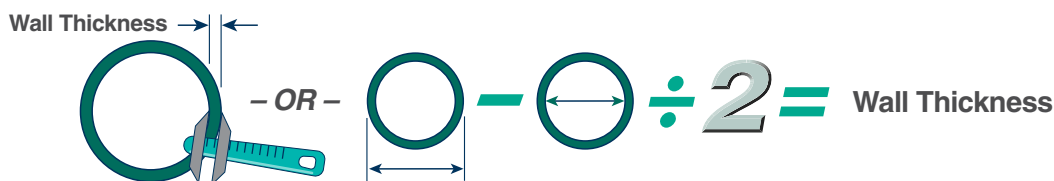

Wall Thickness (Inches)	0.239	0.224	0.209	0.194	0.179	0.164	0.149	0.134	0.120	0.109	0.095	0.083	0.072	0.065	0.058	0.049	0.042	0.035	0.028
(mm)	6.1	5.7	5.3	4.9	4.5	4.2	3.8	3.4	3	2.8	2.4	2.1	1.8	1.7	1.5	1.2	1.1	0.9	0.7
Tube Gauge	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	22

**Step 3: Select your desired...**

**Style:**



**Ribbed Design – Fits Multiple Gauges Non-Load Bearing**



**Straight Wall Design – Fits Single Gauge Load Bearing**

**Shape & Finish:**

**Flat, Rounded, Angled, or Articulating**



**Polished, Textured (Matte), or Chromed**



HEAVY DUTY THREADED INSERT GLIDES

**SQH SERIES**

**Square Heavy Duty Threaded Inserts**



**Specifications:**

- Material: Glass-filled nylon with brass threaded insert
- Color: Black

Item No.	Tube Size In	Thread Size	Tube Gauge	Wall Thickness In	Load Capacity lbs.	Price Each
SQH0100A	1.5	3/8-16	16	0.065	1350	11.36
SQH0150A	1.5	1/2-13	16	0.065	1350	11.56
SQH0200A	1.5	5/8-11	16	0.065	1350	11.67
SQH0250A	1.5	3/4-10	16	0.065	1800	12.62
SQH0300A	1.5	3/8-16	11	0.12	1350	11.36
SQH0350A	1.5	1/2-13	11	0.12	1350	11.56
SQH0400A	1.5	5/8-11	11	0.12	1350	11.67
SQH0450A	1.5	3/4-10	11	0.12	1800	12.62

**Features:**

- Threaded brass insert for indoor and outdoor use
- High load rating is ideal for machinery use

Item No.	Tube Size In	Thread Size	Tube Gauge	Wall Thickness In	Load Capacity lbs.	Price Each
SQH0500A	2	3/8-16	16	0.065	1350	13.15
SQH0550A	2	1/2-13	16	0.065	1350	13.37
SQH0600A	2	5/8-11	16	0.065	1350	13.58
SQH0650A	2	3/4-10	16	0.065	2000	14.54
SQH0700A	2	3/8-16	12	0.109	1350	13.15
SQH0750A	2	1/2-13	12	0.109	1350	13.37
SQH0800A	2	5/8-11	12	0.109	1350	13.58
SQH0850A	2	3/4-10	12	0.109	2000	14.54

**RDH Series**

**Round Heavy Duty Threaded Inserts**



**Specifications:**

- Material: Glass-filled nylon with brass threaded insert
- Color: Black

Item No.	Tube Size In	Thread Size	Tube Gauge	Wall Thickness In	Load Capacity lbs.	Price Each
RDH0100A	1.500	3/8-16	16	0.065	1100	11.78
RDH0150A	1.500	1/2-13	16	0.065	1100	11.99
RDH0200A	1.500	5/8-11	16	0.065	1100	12.20
RDH0250A	1.500	3/4-10	16	0.065	1100	13.15
RDH0300A	2.000	3/8-16	16	0.065	1250	13.68
RDH0350A	2.000	1/2-13	16	0.065	1250	13.90

**Features:**

- Threaded brass insert for indoor and outdoor use
- High load rating is ideal for machinery use

Item No.	Tube Size In	Thread Size	Tube Gauge	Wall Thickness In	Load Capacity lbs.	Price Each
RDH0400A	2.000	5/8-11	16	0.065	1250	14.11
RDH0450A	2.000	3/4-10	16	0.065	2000	15.07
RDH0500A	2.000	3/8-16	12	0.109	1250	13.68
RDH0550A	2.000	1/2-13	12	0.109	1250	13.90
RDH0600A	2.000	5/8-11	12	0.109	1250	14.11
RDH0650A	2.000	3/4-10	12	0.109	2000	15.07

FREE CAD DRAWINGS


3D

We make it easy with worldwide standard file types and a 3D viewer that lets you manipulate the part you need before downloading it.

**THREADED INSERT GLIDES**

Buy One or Buy Bulk & **SAVE!**

**SQM Series**  
Square Metal Threaded Inserts



Specifications:

- Material: HDPE with Zinc-Plated Steel-Threaded Insert
- Color: Black

Features:

- Tube inserts with internal threads to accommodate adjustable leveling mounts and feet
- Ribbed to accommodate multiple gauges

Item No.	Tube Size	Thread Size	Gauge	Wall Thickness In	Price Each
SQM0150A	0.750	1/4-20	16-18	0.049-0.065	1.00
SQM0200A	0.875	1/4-20	16-18	0.049-0.065	1.22
SQM0300A	1.000	1/4-20	16-18	0.049-0.065	1.12
SQM0350A	1.000	5/16-18	16-18	0.049-0.065	1.15
SQM0400A	1.000	1/4-20	12-14	0.083-0.109	1.33
SQM0450A	1.000	5/16-18	12-14	0.083-0.109	1.38
SQM0500A	1.000	1/4-20	10-11	0.120-0.134	1.79
SQM0550A	1.000	5/16-18	10-11	0.120-0.134	1.86

Item No.	Tube Size	Thread Size	Gauge	Wall Thickness In	Price Each
SQM0600A	1.250	5/16-18	16-18	0.049-0.065	1.78
SQM0650A	1.250	3/8-16	16-18	0.049-0.065	1.94
SQM0700A	1.250	5/16-18	12-14	0.083-0.109	1.78
SQM0750A	1.250	3/8-16	12-14	0.083-0.109	1.94
SQM0800A	1.250	5/16-18	10-11	0.120-0.134	2.38
SQM0850A	1.250	3/8-16	10-11	0.120-0.134	2.60
SQM0900A	1.375	3/8-16	16-18	0.049-0.065	2.41
SQM1000A	1.500	3/8-16	16-18	0.049-0.065	2.21

**RDM Series**  
Round Metal Threaded Inserts

Specifications:

- Material: HDPE with Zinc-Plated Steel-Threaded Insert
- Color: Black

Features:

- Tube inserts with internal threads to accommodate adjustable leveling mounts and feet
- Ribbed to accommodate multiple gauges



Item No.	Tube Size	Thread Size	Gauge	Wall Thickness In	Price Each
RDM0100A	0.750	1/4-20	16-18	0.049-0.065	1.06
RDM0150A	0.875	1/4-20	16-18	0.049-0.065	1.00
RDM0200A	0.875	1/4-20	12-14	0.083-0.109	1.11
RDM0250A	0.875	1/4-20	10-11	0.120-0.134	1.11
RDM0300A	1.000	1/4-20	16-18	0.049-0.065	1.25
RDM0350A	1.000	5/16-18	16-18	0.049-0.065	1.29
RDM0400A	1.000	1/4-20	12-14	0.083-0.109	1.16
RDM0450A	1.000	5/16-18	12-14	0.083-0.109	1.23
RDM0500A	1.000	1/4-20	10-11	0.120-0.134	1.30
RDM0550A	1.000	5/16-20	10-11	0.120-0.134	1.64
RDM0600A	1.125	5/16-18	16-18	0.049-0.065	1.39
RDM0650A	1.125	3/8-16	16-18	0.049-0.065	1.64

Item No.	Tube Size	Thread Size	Gauge	Wall Thickness In	Price Each
RDM0700A	1.250	5/16-18	16-18	0.049-0.065	1.61
RDM0750A	1.250	3/8-16	16-18	0.049-0.065	1.78
RDM0800A	1.250	5/16-18	12-14	0.083-0.109	1.86
RDM0950A	1.375	3/8-16	16-18	0.049-0.065	2.36
RDM1050A	1.500	5/16-18	16-18	0.049-0.065	2.11
RDM1100A	1.500	3/8-16	16-18	0.049-0.065	2.11
RDM1150A	1.500	5/16-18	12-14	0.083-0.109	2.11
RDM1200A	1.500	3/8-16	12-14	0.083-0.109	2.11
RDM2000A	2.000	5/16-18	14-16	0.065-0.083	2.97
RDM2050A	2.000	3/8-16	14-16	0.065-0.083	3.16

**RCM Series**  
Rectangular Metal Threaded Inserts



Specifications:

- Material: HDPE with Zinc-Plated Steel-Threaded Insert
- Color: Black

Features:

- Tube inserts with internal threads to accommodate adjustable leveling mounts and feet
- Ribbed to accommodate multiple gauges

Item No.	Tube Size	Thread Size	Gauge	Wall Thickness In	Price Each
RCM0150A	0.75 X 1.50	1/4-20	16-18	0.049-0.065	1.39
RCM0250A	1.00 X 1.50	1/4-20	16-18	0.049-0.065	1.66
RCM0300A	1.00 X 1.50	5/16-18	16-18	0.049-0.065	1.72
RCM0350A	2.00 X 1.00	5/16-18	16-18	0.049-0.065	2.11
RCM0400A	2.00 X 1.00	5/16-18	14-16	0.065-0.083	2.11
RCM0600A	3.00 X 1.50	3/8-16	14-16	0.065-0.083	3.77

# 200+ BRANDS ONE SOURCE



**We've got a leading lineup of product solutions from manufacturers you trust.**



**THREADED INSERT GLIDES**

**TAS Series**  
Square Threaded All Metal Inserts



- Specifications:
- Material: Steel with Zinc plated finish
- Features:
- Metal ribs lock onto inside of square tube

Item No.	Fits Tube In	Thread	Fits Gauge	Price Each
TAS240A	1	5/16-18	16-18	4.19
TAS260A	1-1/4	5/16-18	16-18	4.80
TAS460A	1-1/4	3/8-16	16-18	5.15
TAS270A	1-1/2	5/16-18	16-18	5.40
TAS470A	1-1/2	3/8-16	16-18	5.76

**TAR Series**  
Round Threaded All Metal Inserts



- Specifications:
- Material: Steel with Zinc plated finish
- Features:
- Metal ribs lock onto inside of round tube

Item No.	Fits Tube	Thread	Fits Gauge	Price Each
TAR010A	5/8"	1/4-20	16-18	3.34
TAR020A	3/4"	1/4-20	16-18	3.48
TAR030A	7/8"	1/4-20	16-18	3.64
TAR230A	7/8"	5/16-18	16-18	3.78
TAR040A	1"	1/4-20	16-18	3.89
TAR240A	1"	5/16-18	16-18	4.04
TAR260A	1-1/4"	5/16-18	16-18	4.64
TAR460A	1-1/4"	3/8-16	16-18	4.96
TAR270A	1-1/2"	5/16-18	16-18	5.21
TAR470A	1-1/2"	3/8-16	16-18	5.55

**STI Series**  
Square Plastic Threaded Inserts



- Specifications:
- Material: Nylon
  - Color: Black or Natural
- Features:
- Can be used with either adjustable feet or tilt glides

Item No.	Color	Tube Dia In	Tube Gauge	Thread Size	Price Each
STI1200B	Black	0.750	16	1/4-20	0.41
STI1215A	Natural	0.875	16	1/4-20	1.71
STI1215B	Black	0.875	16	1/4-20	1.90
STI1220A	Natural	1.000	16	1/4-20	3.40
STI1240A	Natural	1.000	18	1/4-20	3.40
STI1260A	Natural	1.000	18	5/16-18	3.40
STI1260B	Black	1.000	18	5/16-18	0.99
STI1270A	Natural	1.250	16	5/16-18	4.54

**LRT & RTI Series**  
Round Plastic Threaded Inserts



- Specifications:
- Material: Nylon and HDPE
  - Color: Black or Natural
- Features:
- Can be used with either adjustable feet or tilt glides
  - Tube inserts with internal threads to accommodate adjustable leveling mounts and feet

Item No.	Color	Material	Tube O.D. In	Tube Gauge	Thread Size	Price Each
LRT1100A	Natural	HDPE	0.625	18	1/4"-20	1.19
LRT1100B	Black	HDPE	0.625	18	1/4"-20	0.64
RTI1100A	Natural	NYLON	0.750	17	1/4"-20	1.19
RTI1100B	Black	NYLON	0.750	17	1/4"-20	1.19
LRT1110A	Natural	HDPE	0.750	18	1/4"-20	1.21
LRT1120A	Natural	HDPE	0.875	18	1/4"-20	4.82
LRT1130A	Natural	HDPE	1.000	16	1/4"-20	1.61
RTI1210A	Natural	NYLON	1.000	16	1/4"-20	0.89
LRT1140A	Natural	HDPE	1.000	18	1/4"-20	1.58

ROUND TUBE INSERT GLIDES

**RDR Series**  
Round Multi-Gauge Ribbed Tube Inserts

Specifications:

- Material: LDPE
- Surface Finish: Polished or Textured

Features:

- Ideal for aesthetic or light-duty load bearing applications
- Perimeter rib design allows for easy assembly and a secure fit
- Used on a wide range of furniture and metal tubing applications



See page 346 for Sizing and Selector Guide.

**Imperial**

Black Item No.				White Item No.				Tube OD	Tube Gauge
Polished	Price Each	Textured	Price Each	Polished	Price Each	Textured	Price Each		
RDR111033A	0.80	RDR111053A	0.80	RDR111073A	0.80	—	—	0.500	16-20
RDR111036A	0.92	RDR111056A	0.96	RDR111076A	0.96	—	—	0.750	14-20
—	—	RDR081012A	1.07	—	—	RDR081012D	1.07	0.875	10-12
RDR081420D	1.10	—	—	RDR111078A	1.10	—	—	0.875	14-20
—	—	RDR101111A	1.07	—	—	—	—	1.000	10-12
RDR101420D	1.31	RDR101420F	1.24	—	—	—	—	1.000	14-20
RDR111040A	1.18	RDR111060A	1.23	RDR111080A	1.23	—	—	1.000	11-19
RDR111042A	1.45	RDR111062A	1.45	RDR111082A	1.45	—	—	1.125	11-19
RDR121014B	1.59	—	—	—	—	—	—	1.250	10-14
RDR111044A	1.49	RDR111064A	1.49	RDR111084A	1.59	—	—	1.250	11-19
RDR131418A	2.22	—	—	—	—	—	—	1.375	14-18
RDR111492A	1.54	RDR111530A	1.54	—	—	—	—	1.375	11-19
RDR150812A	2.44	—	—	—	—	—	—	1.500	8-12
—	—	RDR151012A	2.44	—	—	—	—	1.500	10-12
RDR111046A	2.20	RDR111066A	2.29	—	—	—	—	1.500	11-19
RDR111495A	1.49	RDR111533A	1.49	RDR111571A	1.49	RDR111609A	1.49	1.625	11-19
—	—	RDR171012A	3.62	—	—	—	—	1.750	10-12
RDR111497A	2.86	RDR111535A	2.86	—	—	RDR111611A	2.86	1.750	11-19
RDR111498A	2.01	RDR111536A	2.01	—	—	RDR111612A	2.01	1.875	11-19
RDR201014A	4.10	—	—	—	—	—	—	2.000	10-14
—	—	RDR201420A	4.10	—	—	—	—	2.000	14-18
RDR111049A	3.83	RDR111069A	3.83	RDR111089A	3.83	—	—	2.000	11-19
RDR230508B	6.56	RDR230508A	6.56	—	—	—	—	2.375	5-8
—	—	RDR231014A	4.12	—	—	—	—	2.375	10-14
—	—	RDR250812A	4.98	—	—	—	—	2.500	8-12
RDR111500A	7.86	RDR111538A	8.17	—	—	RDR111614A	4.33	2.500	11-19
RDR460674A	8.76	RDR465601A	5.69	—	—	—	—	2.750	8-14
—	—	RDR280407A	6.56	—	—	—	—	2.875	4-7
—	—	RDR300812A	7.64	—	—	—	—	3.000	8-12
—	—	RDR301418A	7.72	—	—	—	—	3.000	14-18
RDR111052A	6.87	RDR111072A	7.14	RDR111092A	7.14	—	—	3.000	8-14
RDR400511A	15.13	—	—	—	—	—	—	4.000	5-11
RDR450711A	19.77	—	—	—	—	—	—	4.500	7-11

**Metric**

Black Item No.		White Item No.		Tube OD	Tube Gauge	Price Each
Polished	Textured	Textured	Textured			
—	RDR111527A	—	—	10.00	11-19	0.48
RDR111490A	RDR111528A	RDR111603A	—	12.00	14-20	0.51
RDR111034A	—	—	—	13.00	14-20	0.50
—	RDR460660A	—	—	15.00	14-20	0.61
RDR111035A	RDR111055A	—	—	16.00	14-20	0.68
RDR111037A	RDR111057A	—	—	20.00	14-20	1.00
RDR111038A	RDR111058A	—	—	22.00	14-20	1.03
RDR111043A	RDR111063A	—	—	30.00	11-19	1.48

Black Item No.		White Item No.		Tube OD	Tube Gauge	Price Each
Polished	Textured	Textured	Textured			
RDR111044A	RDR111064A	RDR111084A	—	32.00	11-19	1.49
RDR111794A	RDR111795A	—	—	32.00	11-14	1.89
—	RDR111067A	—	—	40.00	11-19	4.28
RDR111494A	RDR111532A	—	—	42.00	11-19	1.83
RDR111496A	—	RDR111610A	—	45.00	11-19	2.21
—	RDR465600A	—	—	55.00	11-19	17.87
RDR111050A	RDR111070A	—	—	60.00	11-19	3.28
—	RDR465596A	—	—	105.00	7-14	13.74


# NEW

## ACCESS HARDWARE

Pages 692 - 789

**ROUND TUBE INSERT GLIDES**

**RDG Series  
Round Load Bearing Glides**



Specifications:

- Material: Refer to Chart
- Color: Black

Features:

- Glides are designed for use as a glide or plug style closure
- A reduced diameter step-lead is provided for easy positioning and insertion
- Ideal for moderate to heavy-duty applications



Item No.	Tube O.D. In	Tube Gauge	Wall Thickness In	Material	Price Each
RDG1100A	0.375	19	0.042	ABS	0.34
RDG1105A	0.500	16	0.065	ABS	1.14
RDG1110A	0.500	18	0.049	ABS	1.14
RDG1115A	0.500	20	0.035	ABS	0.40
RDG1120A	0.500	21	0.032	ABS	1.22
RDG1125A	0.500	22	0.028	ABS	1.10
RDG1127A	0.563	19	0.042	HDPE	0.42
RDG1130A	0.563	20	0.035	ABS	0.34
RDG1135A	0.563	22	0.028	ABS	0.38
RDG1140A	0.625	11	0.120	ABS	1.32
RDG1145A	0.625	12	0.109	ABS	1.32
RDG1150A	0.625	13	0.095	ABS	1.28
RDG1155D	0.625	14	0.083	ABS	0.35
RDG1160A	0.625	15	0.072	ABS	0.42
RDG1165A	0.625	16	0.065	ABS	1.18
RDG1168B	0.625	17	0.058	Butyrate	0.43
RDG1170A	0.625	17	0.058	ABS	0.83
RDG1175A	0.625	18	0.049	ABS	1.18
RDG1180A	0.625	20	0.035	ABS	0.37
RDG1185A	0.625	22	0.028	ABS	0.32
RDG1190A	0.750	13	0.095	ABS	0.40
RDG1195C	0.750	14	0.083	ABS	0.37
RDG1196A	0.750	14	0.083	ABS	0.57
RDG1200A	0.750	16	0.065	ABS	0.35
RDG1205A	0.750	17	0.058	ABS	0.28
RDG1210A	0.750	18	0.049	ABS	0.24
RDG1215A	0.750	19	0.042	ABS	1.39
RDG1220A	0.750	20	0.035	ABS	0.88
RDG1225A	0.750	22	0.028	ABS	0.28
RDG1228B	0.875	13	0.095	LDPE	0.52
RDG1230A	0.875	14	0.083	ABS	1.38
RDG1235A	0.875	16	0.065	ABS	1.53
RDG1237B	0.875	17	0.058	Nylon	0.65
RDG1240A	0.875	18	0.049	ABS	1.24
RDG1245A	0.875	19	0.042	ABS	0.28
RDG1250A	0.875	20	0.035	ABS	0.90
RDG1255A	1.000	12	0.109	ABS	1.10
RDG1264B	1.000	14	0.083	Butyrate	0.58
RDG1265A	1.000	14	0.083	ABS	1.77
RDG1270A	1.000	15	0.072	ABS	0.34
RDG1273B	1.000	16	0.065	Butyrate	0.53
RDG1274D	1.000	16	0.065	Nylon	0.74

Item No.	Tube O.D. In	Tube Gauge	Wall Thickness In	Material	Price Each
RDG1275A	1.000	16	0.065	ABS	1.10
RDG1280A	1.000	17	0.058	ABS	0.34
RDG1285A	1.000	18	0.049	ABS	1.10
RDG1290A	1.000	19	0.042	ABS	0.34
RDG1295C	1.000	20	0.035	ABS	0.34
RDG1305C	1.125	12	0.109	ABS	0.40
RDG1310A	1.125	14	0.083	ABS	1.27
RDG1315A	1.125	16	0.065	ABS	1.27
RDG1320B	1.125	18	0.049	ABS	0.40
RDG1325A	1.125	19	0.042	ABS	0.40
RDG1327B	1.130	20	0.035	LDPE	0.54
RDG1330A	1.250	11	0.120	ABS	0.51
RDG1335C	1.250	12	0.109	ABS	0.42
RDG1340A	1.250	14	0.083	ABS	1.64
RDG1345A	1.250	16	0.065	ABS	1.91
RDG1350D	1.250	18	0.049	ABS	0.42
RDG1355A	1.375	13	0.095	ABS	2.11
RDG1360A	1.375	14	0.083	ABS	2.11
RDG1365A	1.375	16	0.065	ABS	2.11
RDG1370C	1.375	18	0.049	ABS	0.66
RDG1375A	1.375	20	0.035	ABS	0.66
RDG1380A	1.500	12	0.109	ABS	0.78
RDG1385A	1.500	14	0.083	ABS	2.49
RDG1390A	1.500	16	0.065	ABS	2.49
RDG1394B	1.500	18	0.049	Butyrate	1.10
RDG1395D	1.500	18	0.049	ABS	2.49
RDG1400A	1.500	19	0.042	ABS	2.49
RDG1405A	1.500	20	0.035	ABS	0.78
RDG1408B	1.625	16	0.065	Nylon	1.12
RDG1410A	1.625	18	0.049	ABS	0.80
RDG1415A	1.750	11	0.120	ABS	0.83
RDG1420A	1.750	14	0.083	ABS	0.83
RDG1425A	1.750	16	0.065	ABS	2.66
RDG1430A	1.750	18	0.049	ABS	2.66
RDG1435A	1.750	20	0.035	ABS	2.66
RDG1445A	2.000	11	0.120	ABS	0.91
RDG1455A	2.000	16	0.065	ABS	0.91
RDG1460A	2.000	18	0.049	ABS	0.91
RDG1465A	2.000	20	0.035	ABS	0.91
RDG1470A	2.500	18	0.049	ABS	1.43
RDG1475A	3.000	13	0.095	ABS	1.58

**LRDR Series  
Round Ribbed Tube Inserts**



Specifications:

- Material: High-Density Polyethylene
- Color: Black with Matte Finish

Features:

- Designed for light load-bearing applications or cosmetic finishing

Item No.	Tube O.D.		Tube Gauge	Wall Thickness In	Price Each
	In	mm			
LRDR071620A	0.750	19.05	16-20	0.035-0.065	0.77
LRDR081420A	0.875	22.22	14-20	0.035-0.083	0.49
LRDR101420A	1.000	25.40	14-20	0.035-0.083	1.10

Item No.	Tube O.D.		Tube Gauge	Wall Thickness In	Price Each
	In	mm			
LRDR111418A	1.125	28.57	14-18	0.035-0.083	0.77
LRDR121620A	1.250	31.75	16-20	0.035-0.065	1.69

ROUND TUBE INSERT GLIDES

**RLI Series**  
Round Low Profile Insert Glides



Specifications:

- Material: Low-Density Polyethylene
- Color: Black

Features:

- Lightweight insert glides present a low-cost option for neatly finishing steel tubes

Item No.	Tube O.D.		Tube Gauge	Wall Thickness In	Price Each
	In	mm			
RLI0516A	0.500	12.70	16	0.065	0.58
RLI0518A	0.500	12.70	18	0.049	0.58
RLI0520A	0.500	12.70	20	0.035	0.58
RLI0616A	0.625	15.87	16	0.065	0.50
RLI0618A	0.625	15.87	18	0.049	0.62
RLI0716A	0.750	19.05	16	0.065	0.71
RLI0718A	0.750	19.05	18	0.049	0.73
RLI0816A	0.875	22.22	16	0.065	0.93
RLI0818A	0.875	22.22	18	0.049	0.58
RLI1016A	1.000	25.40	16	0.065	0.71

Item No.	Tube O.D.		Tube Gauge	Wall Thickness In	Price Each
	In	mm			
RLI1018A	1.000	25.40	18	0.049	0.93
RLI1116A	1.125	28.57	16	0.065	1.40
RLI1118A	1.125	28.57	18	0.049	1.40
RLI1216A	1.250	31.75	16	0.065	1.74
RLI1218A	1.250	31.75	18	0.049	1.68
RLI1516A	1.500	38.10	16	0.065	2.67
RLI1518A	1.500	38.10	18	0.049	1.87
RLI1716A	1.750	44.45	16	0.065	2.14
RLI1718A	1.750	44.45	18	0.049	2.14
RLI2018A	2.000	50.80	18	0.049	4.84

**RLP Series**  
Round Metric Low Profile Insert Glides



Specifications:

- Material: Low Density Polyethylene
- Color: Black



Features:

- Low profile design allows for a finishing component with limited space

Item No.	Tube OD		Wall Thickness	Price Each
	mm	Tube Gauge		
466562	10	16-20	0.80 - 1.50	0.53
466563	12	14-16	1.50 - 2.00	0.67
466564	14	14-16	1.50 - 2.00	0.67
RDR466565A	15	16-20	0.80 - 2.00	0.49
466566	16	16-20	0.80 - 2.00	0.67
466567	18	16-20	0.80 - 2.00	0.74
466568	19	16-20	0.80 - 2.00	0.74
466569	20	13-20	0.80 - 2.50	0.87
466570	22	13-20	1.00 - 2.50	0.94
466571	24	13-20	1.00 - 2.50	1.13
466572	25	13-20	1.00 - 2.50	0.94

Item No.	Tube OD		Wall Thickness	Price Each
	mm	Tube Gauge		
466573	28	13-20	0.80 - 2.50	1.00
466574	30	13-20	0.80 - 2.50	1.17
466575	32	13-20	0.80 - 2.50	1.17
466576	35	11-19	1.00 - 3.00	1.46
466577	38	11-19	1.00 - 3.00	1.50
466578	40	11-19	1.00 - 3.00	1.81
460789	42	13-20	0.80 - 2.50	4.08
466579	45	11-19	1.00 - 3.00	2.01
466580	50	13-20	1.00 - 2.50	2.40
466581	55	11-19	1.00 - 3.00	2.87
466582	60	11-16	1.50 - 3.00	6.37

**GSB & GFB Series**  
Round Ribbed Inserts  
Felt and Steel Based



Specifications:

- Insert Material: Nylon
- Base Material: See Chart
- Color: Black

Material	Felt	Steel
Surface Uses	Wood and other soft surfaces	Smooth Surfaces

GFB Series


GSB Series

Item No.	Price Each	Item No.	Price Each	D		h		L= Fits	
				In	mm	In	mm	Wall (In)	Gauge
GFB465536A	1.74	GSB465537A	1.08	0.787	20.00	0.748	19.00	0.060-0.090	14-17
GFB465538A	1.83	GSB465539A	1.87	0.866	22.00	0.748	19.00	0.060-0.090	14-17
GFB465540A	1.97	GSB465541A	2.51	0.984	25.00	0.748	19.00	0.060-0.090	14-17
GFB465542A	2.47	GSB465543A	2.45	1.102	28.00	0.748	19.00	0.060-0.090	14-17
GFB465544A	2.63	GSB465545A	3.73	1.181	30.00	0.748	19.00	0.060-0.090	14-17
GFB465546A	2.68	GSB465547A	3.75	1.260	32.00	0.748	19.00	0.060-0.090	14-17


**ROUND TUBE INSERT GLIDES**

**TSNB, TSFB & TSSB SERIES**


Round Ribbed Inserts  
Nylon, Felt & Steel Based



TSNB Series



TSSB Series



TSFB Series





Specifications:

- Insert Material: Nylon
- Base Material: See Chart
- Color: Black

Material	Nylon	Felt	Steel
Surface Uses	Hard Surfaces	Wood and other soft surfaces	Smooth Surfaces

Item No.	Price Each	Item No.	Price Each	Item No.	Price Each	D		d		h		L= Fits	
						In	mm	In	mm	In	mm	Wall (In)	Gauge
TSNB465550A	1.66	TSFB465548A	2.09	TSSB465549A	1.94	0.984	25.00	0.748	19.00	0.965	24.50	0.060-0.090	14-17
TSNB465553A	1.66	TSFB465551A	1.99	TSSB465552A	2.27	0.984	25.00	0.787	20.00	0.965	24.50	0.060-0.090	14-17
TSNB465556A	1.68	TSFB465554A	2.24	TSSB465555A	1.98	0.984	25.00	0.866	22.00	0.965	24.50	0.060-0.090	14-17
TSNB465559A	1.71	TSFB465557A	2.08	TSSB465558A	2.01	0.984	25.00	0.984	25.00	0.965	24.50	0.060-0.090	14-17
TSNB465562A	1.78	TSFB465560A	2.15	TSSB465561A	2.15	0.984	25.00	1.102	28.00	0.965	24.50	0.060-0.090	14-17
TSNB465565A	1.69	TSFB465563A	2.18	TSSB465564A	2.05	1.181	30.00	0.748	19.00	0.965	24.50	0.060-0.090	14-17
TSNB465568A	1.69	TSFB465566A	2.20	TSSB465567A	2.05	1.181	30.00	0.787	20.00	0.965	24.50	0.060-0.090	14-17
TSNB465571A	1.71	TSFB465570A	2.24	TSSB465569A	2.10	1.181	30.00	0.866	22.00	0.965	24.50	0.060-0.090	14-17
TSNB465574A	1.74	—	—	TSSB465572A	2.11	1.181	30.00	0.984	25.00	0.965	24.50	0.060-0.090	14-17
TSNB465577A	1.81	TSFB465575A	2.42	TSSB465576A	2.28	1.181	30.00	1.102	28.00	0.965	24.50	0.060-0.090	14-17

**RDP Series**  
Round Ribbed Tube Inserts  
Chrome Finish



See Page 346



Specifications:

- Material: Low-Density Polyethylene
- Color: Black with High-Polished Metal-Finish Shell

Features:

- Polished metallic finish provides enhanced aesthetic appearance
- Horizontal ribbing allows for built-in flexibility to fit multiple tube gauges

Item No.	D		h		h1		Fits		Price Each
	In	mm	In	mm	In	mm	Gauge (In)	mm	
RDP465335A	0.512	13.00	0.315	8.00	0.079	2.00	14-19 (.040-.080)	1.0-2.0	0.34
RDP463586A	0.630	16.00	0.394	10.00	0.079	2.00	14-19 (.040-.080)	1.0-2.0	1.04
RDP465333A	0.709	18.00	0.394	10.00	0.079	2.00	14-19 (.040-.080)	1.0-2.0	0.38
RDP465336A	0.750	19.05	0.394	10.00	0.079	2.00	14-19 (.040-.080)	1.0-2.0	0.40
RDP465338A	0.787	20.00	0.394	10.00	0.118	3.00	14-19 (.040-.080)	1.0-2.0	0.41
RDP465334A	0.866	22.00	0.433	11.00	0.118	3.00	14-19 (.040-.080)	1.0-2.0	0.41
RDP462994A	0.984	25.00	0.591	15.00	0.118	3.00	14-19 (.040-.080)	1.0-2.0	0.90
RDP463587A	1.102	28.00	0.591	15.00	0.118	3.00	14-19 (.040-.080)	1.0-2.0	0.54
RDP463020A	1.181	30.00	0.630	16.00	0.118	3.00	14-19 (.040-.080)	1.0-2.0	0.51
RDP463588A	1.260	32.00	0.630	16.00	0.118	3.00	14-19 (.040-.080)	1.0-2.0	0.60
RDP463021A	1.378	35.00	0.630	16.00	0.118	3.00	14-19 (.040-.080)	1.0-2.0	1.43
RDP465337A	1.496	38.00	0.630	16.00	0.118	3.00	14-19 (.040-.080)	1.0-2.0	1.93
RDP463022A	1.575	40.00	0.630	16.00	0.118	3.00	14-19 (.040-.080)	1.0-2.0	0.74
RDP465339A	1.772	45.00	0.630	16.00	0.118	3.00	14-19 (.040-.080)	1.0-2.0	1.14
RDP463023A	1.969	50.00	0.472	12.00	0.118	3.00	16-17 (.065 - 0.058)	1.50	0.98
RDP465332A	2.362	60.00	0.472	12.00	0.118	3.00	16-17 (.065 - 0.058)	1.50	4.11

ROUND TUBE INSERT GLIDES

**DFRD Series**  
Round Domed Tube Inserts



Specifications:


- Material: Low-Density Polyethylene
- Color: Black

Features:

- Can accommodate any degree of leg angle, while the horizontal ribbed design has built-in flexibility to fit multiple tube gauge sizes

Item No.	Tube O.D.		Tube Gauge	Wall Thickness In	Price Each
	In	mm			
DFRD111522A	0.875	22.22	14-20	0.035-0.083	0.59
DFRD121620A	1.250	31.75	14-18	0.049-0.083	3.57

**BI & LBI Series**  
Round Domed Tube Glides



See Page 346



Specifications:

- Material: Refer to Chart
- Color: Black or Natural

Features:

- Provides a neat finish for steel tubing

Item No.	Material	Color	Tube O.D.		Tube Gauge	Wall Thickness In	Price Each
			In	mm			
BI1000A	ABS	Black	0.625	15.88	18	0.049	1.54
BI1100A	ABS	Black	0.750	19.05	15	0.072	0.35
LBI1130A	LDPE	Black	0.750	19.05	16	0.065	1.60
LBI1132A	LDPE	Black	0.750	19.05	16	0.065	0.63
BI1110A	ABS	Black	0.875	22.23	14	0.083	1.15
LBI1140A	LDPE	Black	0.875	22.23	14	0.083	1.41
BI1120A	ABS	Black	0.875	22.23	16	0.065	1.19
BI1130A	ABS	Black	0.875	22.23	20	0.035	0.30
BI1140A	ABS	Black	1.000	25.40	14	0.083	0.34
BI1150A	ABS	Black	1.000	25.40	16	0.065	1.41
LBI1180A	LDPE	Black	1.000	25.40	16	0.065	1.29
BI1160A	ABS	Black	1.000	25.40	18	0.049	1.10

Item No.	Material	Color	Tube O.D.		Tube Gauge	Wall Thickness In	Price Each
			In	mm			
LBI1190A	LDPE	Black	1.000	25.40	18	0.049	1.78
BI1170A	ABS	Black	1.000	25.40	20	0.035	1.10
BI1180A	ABS	Black	1.125	28.58	12	0.109	0.61
BI1200A	ABS	Black	1.125	28.58	16	0.065	0.54
BI1210A	ABS	Black	1.125	28.58	18	0.049	0.60
BI1220A	ABS	Black	1.228	31.19	14	0.083	0.70
BI1230A	ABS	Black	1.250	31.75	16	0.065	1.45
BI1240A	ABS	Black	1.375	34.93	14	0.083	0.63
BI1250A	ABS	Black	1.500	38.10	11	0.120	0.92
BI1260A*	ABS	Black	1.500	38.10	14	0.083	0.90
BI1270A	ABS	Black	1.500	38.10	16	0.065	2.88

\* This part has a textured (not polished) finish

**RAG Series**  
Round Angled Tube Inserts



Specifications:

- Material: Nylon
- Color: Black or Natural

Features:

- Ideal for applications with fixed leg angles
- Round angle insert glides fit flush with tubing outer dimensions for a clean, finished look
- Ideal for load bearing applications

Item No.	Price Each	Item No.	Price Each	Tube O.D. In	Tube Gauge	Wall Thickness In	Degree
Black		Natural					
RAG1220A	0.77	RAG1220B	2.23	0.750	16	0.065	25.5°
RAG1240A	1.02	RAG1240B	1.45	0.875	16	0.065	19°
RAG1260A	0.77	RAG1260B	0.77	0.875	17	0.058	19°
RAG1270A	0.49	RAG1270B	1.93	1.000	16	0.065	12°
—	—	RAG1280B	1.85	1.000	16	0.065	19°
RAG1310A	0.59	RAG1310B	1.90	1.000	18	0.049	12°

Item No.	Price Each	Item No.	Price Each	Tube O.D. In	Tube Gauge	Wall Thickness In	Degree
Black		Natural					
—	—	RAG1320B	0.59	1.000	18	0.049	19°
RAG1325A	0.94	RAG1325B	0.76	1.125	16	0.065	15°
RAG1340A	0.56	RAG1340B	2.87	1.250	16	0.065	15°
RAG1350A	2.44	RAG1350B	9.68	1.250	17	0.058	7°
RAG1360A	0.89	RAG1360B	2.87	1.250	18	0.049	15°
RAG1375A	2.12	RAG1375B	2.12	1.500	16	0.065	19°

**ROUND TUBE CAPS**

**HLD Series  
High Line Domed Ferrule Caps**



Specifications:

- Material: Elastomeric Polyethylene
- Color: Black

Features:

- High-line domed caps are tall and durable
- Ideal for non-skid applications. (These caps have a thinner wall section resulting in ease of installation)

Item No.		Tube O.D.		Price Each
Black	White	In	mm	
<b>HLD0750A</b>	<b>HLD0750C</b>	0.750	19.05	<b>0.67</b>
<b>HLD0875A</b>	<b>HLD0875C</b>	0.875	22.22	<b>0.79</b>
<b>HLD1000A</b>	<b>HLD1000C</b>	1.000	25.40	<b>0.82</b>

**HDC Series  
Heavy Duty Ferrule Caps**



Specifications:


- Material: Low-Density Polyethylene
- Color: Black

Features:

- Style A – Low-silhouette cap for general applications (1/2" height)
- Style B – High-line cap for heavy-duty applications (1" height)
- Style C – Heavy-duty caps, designed for institutional applications, incorporate a thick internal ledge to resist cut-thru by sharp tubing ends (1" height)

Item No.	To Fit Tube Size		Style	Price Each
	In	mm		
<b>HDC0375A</b>	0.375	9.53	B	<b>0.55</b>
<b>HDC0750A</b>	0.750	19.05	A	<b>0.74</b>
<b>HDC0875A</b>	0.875	22.23	B	<b>1.79</b>
<b>HDC1125A</b>	1.125	28.58	C	<b>1.26</b>
<b>HDC1250A</b>	1.250	31.75	A	<b>4.28</b>
<b>HDC1500A</b>	1.500	38.10	A	<b>2.22</b>

**FRD Series  
Round Ferrule Caps**



Specifications:

- Material: Low-Density Polyethylene

Features:

- Provides a neat finish to products manufactured from tubular steel

Item No.	d	Price Each
<b>FRD0437A</b>	0.437	<b>0.57</b>
<b>FRD0500A</b>	0.500	<b>0.58</b>
<b>FRD0625A</b>	0.625	<b>0.74</b>
<b>FRD0750A</b>	0.750	<b>0.71</b>
<b>FRD0875A</b>	0.875	<b>1.16</b>
<b>FRD1000A</b>	1.000	<b>1.86</b>

Item No.	d	Price Each
<b>FRD1125A</b>	1.125	<b>1.52</b>
<b>FRD1250A</b>	1.250	<b>2.29</b>
<b>FRD1500A</b>	1.500	<b>5.26</b>
<b>FRD1750A</b>	1.750	<b>3.81</b>
<b>FRD2000A</b>	2.000	<b>6.47</b>
<b>FRD3000A</b>	3.000	<b>9.49</b>

**NEW**  
VIBRATION MOUNTS


Pages 340 - 343

RECTANGULAR & OVAL INSERT GLIDES

**RTG Series**  
Rectangular Load Bearing Glides

- Specifications:
- Material: ABS
  - Color: Black

- Features:
- Suitable for light- and heavy-duty applications
  - Step lead provides for easy installation
  - Press fit assures a secure hold in tubing



Item No.	Tube Size In	Tube Gauge	Wall Thickness In	Price Each
RTG1100A	0.500 x 1.000	16	0.065	1.58
RTG1110A	0.500 x 1.000	18	0.049	1.58
RTG1120A	0.500 x 1.250	16	0.065	1.21
RTG1150A	0.500 x 1.500	16	0.065	1.31
RTG1160A	0.500 x 1.500	18	0.049	1.31
RTG1190A	0.750 x 1.250	18	0.049	1.58
RTG1210A	0.750 x 1.500	14	0.083	1.54
RTG1220A	0.750 x 1.500	16	0.065	0.48
RTG1230A	0.750 x 1.500	18	0.049	1.54
RTG1240A	0.750 x 2.000	16	0.065	1.88
RTG1250A	1.000 x 1.500	11	0.120	1.82
RTG1270A	1.000 x 1.500	14	0.083	0.57
RTG1280A	1.000 x 1.500	16	0.065	0.57
RTG1290A	1.000 x 1.500	18	0.049	1.82
RTG1310A	1.000 x 2.000	11	0.120	1.86
RTG1340A	1.000 x 2.000	14	0.083	1.86
RTG1350A	1.000 x 2.000	16	0.065	1.86
RTG1359B	1.000 X 2.000	17	0.058	0.68
RTG1370A	1.000 x 2.000	18	0.049	0.58
RTG1390A	1.000 x 3.000	11	0.120	3.01
RTG1400A	1.000 x 3.000	14	0.083	3.01


Item No.	Tube Size In	Tube Gauge	Wall Thickness In	Price Each
RTG1410A	1.000 x 3.000	16	0.065	0.94
RTG1420A	1.250 x 2.000	12	0.109	2.83
RTG1430A	1.250 x 2.000	14	0.083	2.83
RTG1440A	1.250 x 2.000	16	0.065	2.83
RTG1450A	1.500 x 2.000	11	0.120	3.03
RTG1460A	1.500 x 2.000	14	0.083	2.91
RTG1470A	1.500 x 2.000	15	0.072	0.94
RTG1480A	1.500 x 2.000	16	0.065	3.01
RTG1490A	1.500 x 2.500	11	0.120	1.49
RTG1500A	1.500 x 2.500	12	0.109	3.11
RTG1510A	1.500 x 2.500	16	0.065	0.94
RTG1521A	1.500 x 3.000	11	0.120	3.27
RTG1530A	1.500 x 3.000	14	0.083	3.25
RTG1540A	1.500 x 3.000	16	0.065	4.11
RTG1550A	1.500 x 4.000	16	0.065	1.06
RTG1560A	2.000 x 3.000	11	0.120	3.63
RTG1570A	2.000 x 3.000	14	0.083	3.61
RTG1580B	2.000 x 4.000	11	0.120	6.39
RTG1590B	2.000 x 4.000	13	0.095	2.28
RTG1600B	2.000 x 4.000	16	0.065	2.25

**RCP Series**  
Rectangular Ribbed Tube Inserts  
Chrome Finish



- Specifications:
- Material: Low-Density Polyethylene
  - Color: Black with Highly-Polished Metal-Finish Shell

- Features:
- Polished metallic finish provides enhanced aesthetic appearance
  - Horizontal ribbing allows for built-in flexibility to fit multiple tube gauges




Item No.	L1 x L		h		h1		Gauge Wall		Price Each
	In	mm	In	mm	In	mm	In	mm	
RCP460966A	0.394 X 0.787	10 x 20	0.394	10.00	0.059	1.50	.040-.080	1.0-2.0	1.01
RCP460967A	0.591 X 0.787	15 x 20	0.394	10.00	0.079	2.00	.040-.080	1.0-2.0	1.11
RCP460968A	0.591 X 1.181	15 x 30	0.394	10.00	0.079	2.00	.040-.080	1.0-2.0	1.24
RCP460969A	0.787 X 1.575	20 x 40	0.433	11.00	0.079	2.00	.040-.080	1.0-2.0	1.45

**OVP Series**  
Oval Ribbed Tube Inserts  
Chrome Finish



- Specifications:
- Material: Low-Density Polyethylene
  - Color: Black with Highly-Polished Metal-Finish Shell

- Features:
- Polished metallic finish provides enhanced aesthetic appearance
  - Horizontal ribbing allows for built-in flexibility to fit multiple tube gauges




Item No.	L1 x L		h		h1		Gauge (In)		Price Each
	In	mm	In	mm	In	mm	In	mm	
OVP200100A	0.787 x 0.394	20 x 10	0.394	10.00	0.079	2.00	14-19 (.040-.080)	1.0-2.0	0.92
OVP463024A	1.181 x 0.591	30 x 15	0.394	10.00	0.098	2.50	14-19 (.040-.080)	1.0-2.0	1.01
OVP465360A	1.575 x 0.787	40 x 20	0.394	10.00	0.118	3.00	14-19 (.040-.080)	1.0-2.0	1.36



**SQUARE TUBE CONNECTORS**

**BSC Series  
Rectangular Bar Stock Caps**



Specifications:

- Material: Nylon or Polyethylene
- Color: Black or Natural

Features:

- Rectangular caps for bar steel are manufactured with a rounded or flat base, and serve as an excellent means for capping the ends of bar steel

Item No.	Bar Dimensions		Base Depth		Base Style	Material	Color	Price Each
	In	mm	In	mm				
BSC100A	0.045 x 0.575	1.14 x 14.61	0.287	7.28	Round	Nylon	Natural	0.42
BSC200A	0.125 x 0.750	3.18 x 19.05	0.406	10.31	Flat	Polyethylene	Black	1.71
BSC300A	0.250 x 1.000	6.35 x 25.40	0.625	15.87	Flat	Polyethylene	Black	1.96

**AIC Series  
Angle Iron Caps**

Specifications:

- Material: Low-Density Polyethylene
- Color: Black



Features:

- Angle iron caps are an affordable answer to the problem of protecting floors from the sharp edges of angle iron furniture
- Angle iron caps are also used as caps on metal bed frames and shelves and will not rust while also eliminating the cost of welding steel closures




Item No.	Leg Length		Leg Gauge		Price Each
	In	mm	In	mm	
AIC1000A	1.000	25.40	0.125	3.18	2.83
AIC1125A	1.250	31.74	0.125	3.18	2.88
AIC1128A	1.500	38.10	0.125	3.18	5.62
AIC2000A	1.290	32.78	0.125	3.18	10.16

**End Caps**




Item No.	Color	Price Each
AES-9210	Black	1.05
AES-9110	Gray	1.05

**Two-Way Connectors**




Item No.	Color	Price Each
AES-9215	Black	2.60
AES-9115	Gray	2.60

**Two-Way Corners**



Item No.	Color	Price Each
AES-9220	Black	2.60
AES-9120	Gray	2.60

**Three-Way Tee**




Item No.	Color	Price Each
AES-9230	Black	2.60
AES-9130	Gray	2.60

**Straight 90 degree Base Connectors**



Item No.	Color	Price Each
AES-9240	Black	1.45
AES-9140	Gray	1.45

**Three-Way Corner**



Item No.	Color	Price Each
AES-9250	Black	2.60
AES-9150	Gray	2.60

**Cross Connector**




Item No.	Color	Price Each
AES-9260	Black	2.60
AES-9160	Gray	2.60

**Four-Way Connector**



Item No.	Color	Price Each
AES-9270	Black	2.60
AES-9170	Gray	2.60

**Five-Way Connector**



Item No.	Color	Price Each
AES-9280	Black	2.95
AES-9180	Gray	2.95

Pivot Joint



**80/20® Inc.**  
The Industrial Erector Set®

Item No.	Series	Compatibility Code	Price Each	Mounting Hardware (to Profile End)	Price Each	Mounting Hardware (to T-Slot)	Price Each
<b>Inch</b>							
AES-14017	15	8-15	17.75	(2) AES-3122	0.30	(2) AES-3456	2.05
<b>Metric</b>							
AES-14016	30	8-30	17.75	(2) AES-11-8525	0.37	(2) AES-75-3595	1.10
AES-14018	40	8-40	18.90	(2) AES-11-8525	0.37	(2) AES-75-3625	1.90
AES-14019	45	10-45	19.95	(2) AES-11-8525	0.37	(2) AES-14196	1.35
<b>Inch/Metric</b>							
AES-14011	10 (inch) 25 (metric)	6-10 6-25	17.75	(2) AES-11-6518	0.37	(2) AES-3064	0.21

Tri-Corner Connectors

**80/20® Inc.**  
The Industrial Erector Set®



**Square  
(Inch)**



**Triangular  
(Metric)**

Give corners a finished look. Round is used for quarter round profiles, square for standard profiles and triangular for 45 degree profiles.

Item No.	Series	Compatibility Code	Description	Price Each	Mounting Hardware	Price Each
<b>Inch</b>						
AES-4041	10	6-10	Round tri-corner connector 1 x 1 - End tap 1/4-20	19.94	(3) AES-3017	0.53
AES-4042	10	6-10	Square tri-corner connector 1 x 1 - End tap 1/4-20	17.84	(3) AES-3017	0.53
AES-4441	15	8-15	Round tri-corner connector 1.5 x 1.5 - End tap 1/4-20	21.00	(3) AES-3018	0.63
AES-4442	15	8-15	Square tri-corner connector 1.5 x 1.5 - End tap 1/4-20	19.94	(3) AES-3018	0.63
<b>Metric</b>						
AES-40-4443	40	8-40	Round tri-corner connector 40 x 40mm - End tap M8 x 1.25	22.04	(3) AES-13-8525	0.34
AES-40-4441	40	8-40	Triangular tri-corner connector 40 x 40mm - End tap M8 x 1.25	22.04	(3) AES-13-8525	0.34

2- and 3-Way Corner Connectors

**80/20® Inc.**  
The Industrial Erector Set®




Item No.	Series	Compatibility Code	Description	Price Each	Mounting Hardware	Price Each
<b>2-Way</b>						
AES-14170	30	8-30	2-way corner connector 30 x 30mm	9.50	(2) AES-11-8320	0.41
AES-14172	40	8-40	2-way corner connector 40 x 40mm	11.10	(2) AES-11-8325	0.34
AES-14174	45	10-45	2-way corner connector 45 x 45mm	12.70	(2) AES-13003	1.60
<b>3-Way</b>						
AES-14171	30	8-30	3-way corner connector 30 x 30mm	9.50	(3) AES-11-8320	0.41
AES-14173	40	8-40	3-way corner connector 40 x 40mm	11.10	(3) AES-11-8325	0.34
AES-14175	45	10-45	3-way corner connector 45 x 45mm	12.70	(3) AES-13003	1.60

TUBE CLAMPS


These off-the-shelf components are used for constructing practically anything, permanently or temporarily, without the need of machining, welding, threading, fitting or special tools. This clamp and tube connection system can be configured using an infinite variety of sizes, shapes and clamp features, which offers a degree of flexibility that makes it beneficial to virtually all industries. Some of these industries include production assembly, all areas of material handling, mechanical engineering, OEM machinery design and the automotive and paper industries. They may also be used in applications like food packaging and beverage and chemical processing. Clamps are made from A413 aluminum. These items are reusable and may be used in building industrial frames, workstations, machine guards and production lines.

Cross Clamps

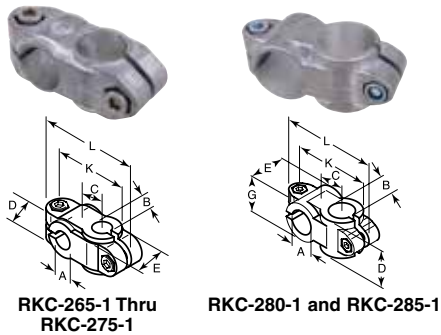

RKC-265-1 Thru RKC-275-1


RKC-280-1 and RKC-285-1

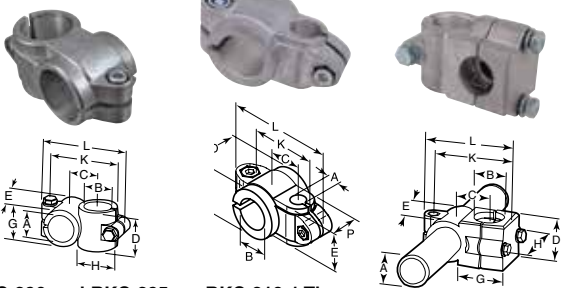

RKC-290 and RKC-295, RKC-325 Thru RKC-350

RKC-310-1 Thru RKC-320-1

RKC-355 and RKC-360

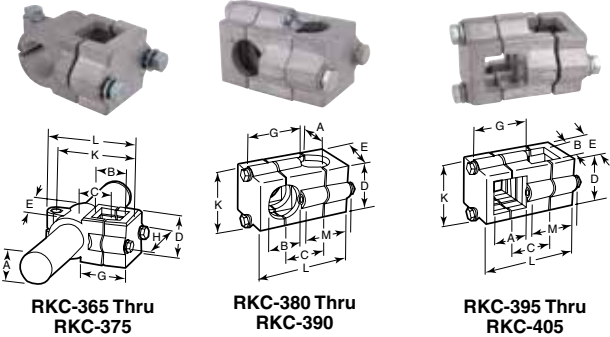

RKC-365 Thru RKC-375


RKC-380 Thru RKC-390

RKC-395 Thru RKC-405

Clamps hold tubes crossing at a 90 degree angle.

Item No.	A	B	C	D	E	G	H	K	L	M	Price Each
<b>Closed Design - Round</b>											
RKC-265-1	1/2	1/2	0.787	1.004	1.004	—	—	1.713	2.598	—	30.48
RKC-270-1	3/8	3/8	0.787	1.004	1.004	—	—	1.713	2.598	—	30.48
RKC-275-1	3/4	3/4	0.787	1.004	1.004	—	—	1.713	2.598	—	30.48
RKC-280-1	1	1	1.299	1.575	1.575	—	—	2.874	3.898	—	38.94
RKC-285-1	1 1/4	1 1/4	1.299	1.575	1.575	—	—	2.874	3.898	—	38.94
RKC-290	1 1/2	1 1/2	1.77	2.36	2.36	2.2	2.2	3.98	5.94	—	55.87
RKC-295	2	2	2.09	2.76	2.76	2.6	2.6	4.69	6.06	—	62.64
RKC-310-1	1/2	1	1.063	1.575	1.299	1.57	—	2.362	3.307	—	33.86
RKC-315-1	3/4	1	1.063	1.575	1.299	1.57	—	2.362	3.307	—	33.86
RKC-320-1	3/4	1	1.063	1.575	1.299	1.57	—	2.362	3.307	—	33.86
RKC-325	1/2	1 1/4	1.06	1.57	1.3	1.57	1.02	2.36	3.31	—	33.86
RKC-335	1	1 1/2	1.42	1.97	1.57	2.05	—	3.07	4.31	—	55.87
RKC-340	1 1/4	1 1/4	1.77	2.56	2.56	2.6	1.89	4.02	4.96	—	71.10
RKC-345	1	2	1.77	2.56	2.56	2.6	—	4.02	5.38	—	71.10
RKC-350	1 1/4	2	1.77	2.56	2.56	2.6	1.89	4.02	4.96	—	71.10
<b>Split / Closed Design - Round</b>											
RKC-355	1	1	1.3	—	—	—	—	2.44	3.35	—	40.62
RKC-360	1 1/2	1 1/2	1.85	—	—	—	—	2.95	4.61	—	59.25
<b>Split / Closed Design - Round and Square</b>											
RKC-365	1	1	1.3	—	—	—	—	2.44	3.35	—	40.62
RKC-370	1 1/4	1 1/4	1.3	—	—	—	—	2.44	3.35	—	40.62
RKC-375	1 1/2	1 1/2	1.85	—	—	—	—	2.95	4.61	—	59.25
<b>Split Design - Round</b>											
RKC-380	1	1	1.48	1.77	1.77	—	—	3.25	1.71	—	40.62
RKC-385	1 1/4	1 1/4	1.48	1.77	1.77	—	—	3.25	1.71	—	72.18
RKC-390	1 1/2	1 1/2	1.97	2.56	2.36	—	—	4.33	2.36	—	59.25
<b>Split Design - Square</b>											
RKC-395	1	1	1.48	1.77	1.77	—	—	3.25	1.71	—	40.62
RKC-400	1 1/4	1 1/4	1.48	1.77	1.77	—	—	3.25	1.71	—	40.62
RKC-405	1 1/2	1 1/2	1.97	2.36	2.36	—	—	4.33	2.36	—	59.25

Flanged Block Clamps - Split Design

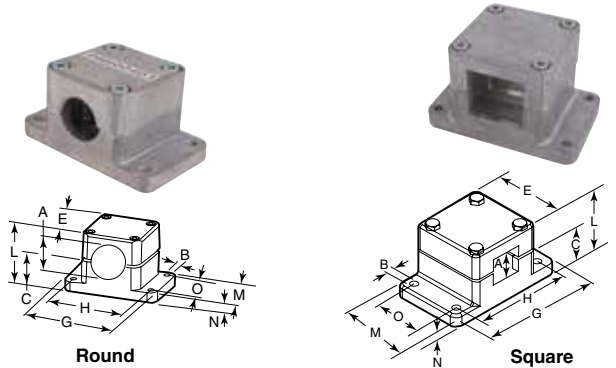


Round

Square

Split design clamp mounts a single tube parallel to a surface with four flange bolt holes.

Item No.	A	B	C	E	G	H	L	M	N	O	Price Each
<b>Round</b>											
RKC-470	1 1/4	0.25	1.18	2.36	3.94	3.23	2.13	2.36	0.39	1.65	45.75
RKC-475	2	0.33	1.97	3.39	4.92	3.86	3.54	4.92	0.47	3.86	69.08
<b>Square</b>											
RKC-490	1	0.26	1.65	2.76	4.33	3.62	2.87	2.76	0.47	2.05	60.87
RKC-495	1 1/2	0.33	1.97	3.39	4.92	3.86	3.54	4.92	0.47	3.86	69.08

Flangeless Block Clamps - Split Design

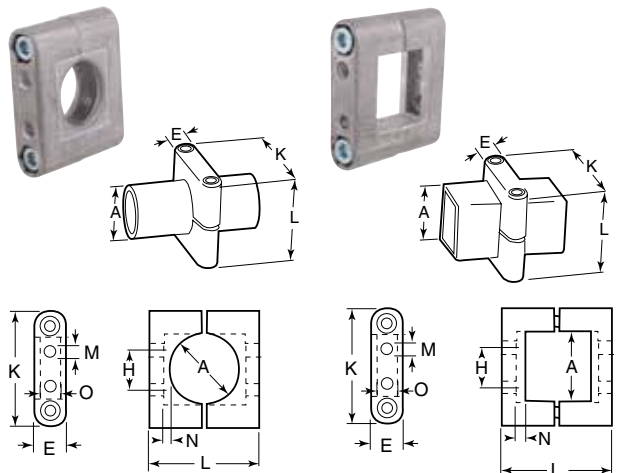

RKC-515 and RKC-520


RKC-530 Thru RKC-540

Split design clamp mounts a single tube parallel to a surface. Drill inside holes for mounting.

Item No.	A	E	H	K	L	M	N	O	Price Each
RKC-515	1	0.63	0.79	2.36	1.97	0.2	0.2	0.31	29.61
RKC-520	2	0.79	1.02	3.35	3.11	0.28	0.31	0.39	36.19
RKC-530	1	0.63	0.79	2.36	1.97	0.2	0.2	0.31	29.61
RKC-535	1 1/2	0.79	1.02	2.95	2.68	0.28	0.28	0.39	32.89
RKC-540	2	0.79	1.02	3.35	3.11	0.28	0.31	0.39	36.19

Flangeless Clamps


Mounts on square tube, or mounts square tube parallel to surface.

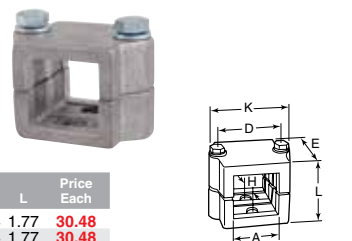

Item No.	A	D	E	H	K	L	Price Each
RKC-165	1	1.77	1.77	—	2.44	1.77	30.48
RKC-170	1 1/4	1.77	1.77	—	2.44	1.77	30.48
RKC-175	1 1/2	2.36	2.36	1.02	2.95	2.36	35.54

These off-the-shelf components are used for constructing practically anything, permanently or temporarily, without the need of machining, welding, threading, fitting or special tools. This clamp and tube connection system can be configured using an infinite variety of sizes, shapes and clamp features, which offers a degree of flexibility that makes it beneficial to virtually all industries. Some of these industries include production assembly, all areas of material handling, mechanical engineering, OEM machinery design and the automotive and paper industries. They may also be used in applications like food packaging and beverage and chemical processing. Clamps are made from A413 aluminum. These items are reusable and may be used in building industrial frames, workstations, machine guards and production lines.

**Angle Clamps**

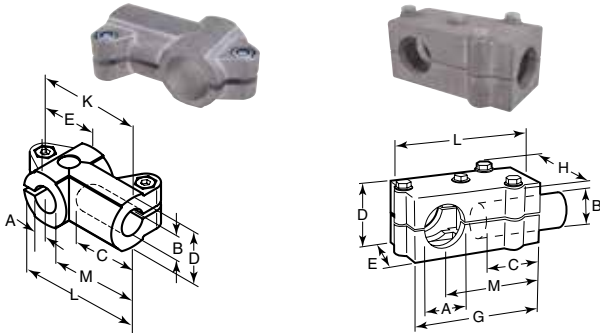

**RKC-5-1 Thru RKC-35**


**RKC-40**

Closed design. T-connection holds dual round tubes at 90 degree angle.

Item No.	A	B	C	D	E	G	H	K	L	M	Price Each
RKC-5-1	1/2	1/2	1.181	1.024	0.39	—	—	2.205	2.60	1.69	30.48
RKC-10-1	3/8	5/8	1.181	1.024	0.39	—	—	2.205	2.60	1.69	30.48
RKC-15-1	3/4	3/4	1.181	1.024	0.39	—	—	2.205	2.60	1.69	30.48
RKC-20-1	1	1	1.575	1.575	0.51	—	—	3.15	3.661	2.36	33.86
RKC-25-1	1 1/4	1 1/4	1.575	1.575	0.51	—	—	3.15	3.661	2.36	33.86
RKC-30-1	1 1/2	2	2.362	2.205	0.67	—	—	4.528	5.276	3.46	50.78
RKC-35	2	2	2.56	2.6	—	—	—	5.35	5.87	—	62.64
RKC-40*	1 1/2	1 1/2	2.36	2.36	2.36	5.08	2.95	—	5.35	3.9	52.47

\*Split design

**Base Clamps**

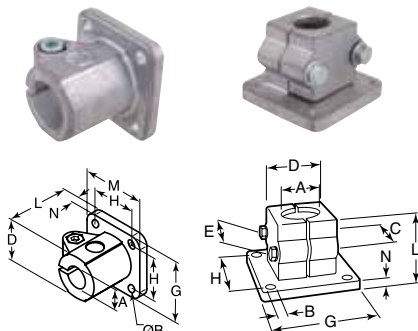


Holds single tube at 90 degree angle.

**Closed Design**

**Split Design**

Item No.	A	B	C	D	E	G	H	L	M	N	Price Each
<b>Closed Design</b>											
RKC-75-1	1	.256	—	1.575	—	2.362	1.654	1.969	2.36	.315	30.48
RKC-80-1	1 1/4	.256	—	1.575	—	2.362	1.654	1.969	2.36	.315	30.48
RKC-85-1	1 1/2	.335	—	2.205	—	3.543	2.520	2.756	3.54	.394	47.40
RKC-90-1	2	.413	—	2.598	—	4.134	2.913	3.346	4.13	.551	52.47
<b>Split Design</b>											
RKC-95	1	.260	2.44	—	1.77	2.950	2.240	2.2	—	.390	40.62
RKC-100	1 1/4	.260	2.44	—	1.77	2.950	2.240	2.2	—	.390	40.62

**Hinge Clamps Flanged**

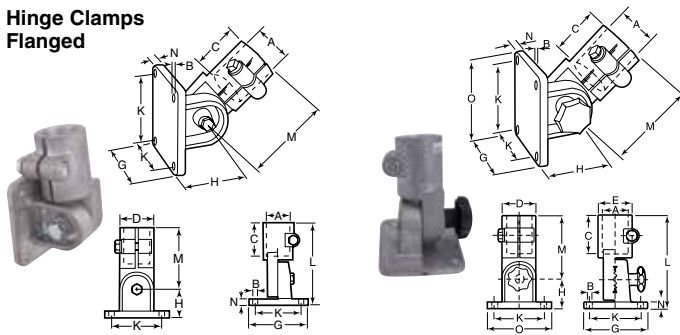


**RKC-205 and RKC-210**

**RKC-220 Thru RKC-230**

Closed design for round tube. Adjustable connection to surface. Ratchet teeth engaging at 15 degree intervals up to 180 degrees. Loosen/tighten center adjustable knob to fix angle.

Item No.	A	B	C	D	E	G	H	K	L	M	N	Price Each
RKC-205	1	.26	1.77	1.57	2.95	2.95	1.28	2.24	4.15	2.87	.28	55.93
RKC-210	1 1/4	.26	1.77	1.57	2.95	2.95	1.28	2.24	4.15	2.87	.28	55.93
RKC-220	1	.26	1.77	1.57	2.95	2.95	1.28	2.24	4.15	2.87	.28	57.57
RKC-225	1 1/2	.33	2.36	2.20	3.94	3.94	1.73	2.99	5.67	3.94	.39	78.96
RKC-230	2	.33	2.76	2.60	4.92	4.92	2.05	3.86	6.57	4.53	.47	82.63

**Flanged Clamps**

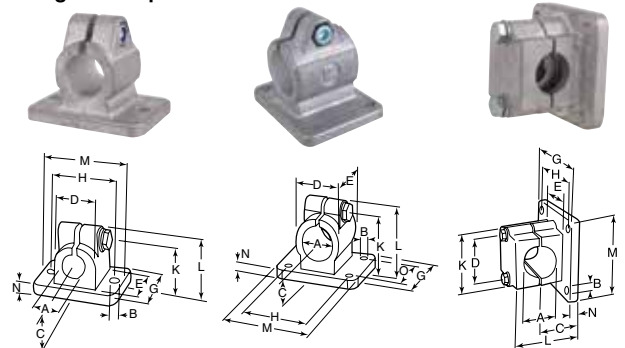

**RKC-105 Thru RKC-120**


**RKC-125 and RKC-135**

**RKC-150 Thru RKC-160**

Mounts tube parallel to surface.

Item No.	A	B	C	D	E	G	H	K	L	M	N	O	Price Each
<b>Closed Design</b>													
RKC-105	1/2	.21	.71	.98	.98	1.38	1.50	1.22	1.46	1.97	.20	—	27.09
RKC-110	5/8	.21	.71	.98	.98	1.38	1.50	1.22	1.46	1.97	.20	—	27.09
RKC-115	3/4	.21	.71	.98	.98	1.38	1.50	1.22	1.46	1.97	.20	—	27.09
RKC-120	1	.26	1.18	1.57	1.57	2.17	2.09	2.05	2.36	2.95	.28	—	32.16
RKC-125	1 1/2	.33	1.65	2.20	2.36	3.15	3.23	2.04	3.43	4.13	.39	2.05	49.10
RKC-135	2	.41	1.97	2.60	2.56	3.54	3.86	3.35	3.86	5.04	.55	2.44	49.51
<b>Split Design</b>													
RKC-150	1	.26	1.18	2.44	1.77	2.95	2.24	2.44	2.07	2.95	.39	—	40.62
RKC-155	1 1/4	.26	1.18	2.44	1.77	2.95	2.24	2.44	2.07	2.95	.39	—	72.18
RKC-160	1 1/2	.33	1.57	2.95	2.36	3.94	2.99	2.95	2.76	3.94	.39	—	52.47

**Hinge Clamps Flangeless**

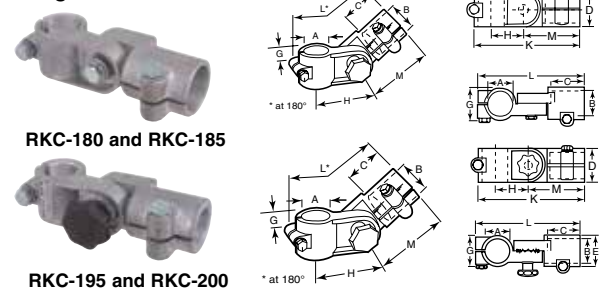

**RKC-180 and RKC-185**

**RKC-195 and RKC-200**

Closed design for round tube. Adjustable cross connections. Pressure fit/variable angle to 180 degrees. Tighten center bolt to fix angle.

Item No.	A	B	C	D	E	G	H	K	L	M	Price Each
RKC-180	1	1	1.77	1.57	1.57	1.57	1.69	5.35	5.75	2.87	55.93
RKC-185	1 1/4	1 1/4	1.77	1.57	1.57	1.57	1.69	5.35	5.75	2.87	55.93
RKC-195	1	1	1.77	1.57	1.57	1.57	1.69	5.35	5.75	2.87	57.57
RKC-200	1 1/2	1 1/2	2.36	2.20	2.20	2.20	2.36	7.40	7.87	3.94	78.95

PIPE FITTINGS

Buy One or Buy Bulk & **SAVE!**



Structural fittings make building a variety of railing systems (and other structures) quick, easy and low in cost. The key is the slip-on design feature which allows ease of assembly with few tools and minimum installer skill levels. There are no bolts, nuts, washers, adhesives, threading or welding. Simply select the fittings you need, cut the pipe to length, slip on fitting and tighten set screw which locks the fitting securely to the pipe. Set screws are 3/8" x 7/16". Hex wrench size is 3/16". The railings are virtually maintenance free as well as salvageable and reusable. These fully American made fittings meet or exceed current OSHA requirements, plus all local/regional building codes. They are precision cast in high-strength aluminum/magnesium alloy that is lightweight and corrosion resistant yet stronger than malleable iron. They're gauged to standard pipe sizes (I.P.S.) and can be used with steel, galvanized steel, or aluminum pipe without a galvanic reaction.

Dimensions of I.P.S. Pipe & Fittings

I.P.S. Pipe Size	1"	1 1/4"	1 1/2"
Pipe I.D.	1.049	1.380	1.610
Pipe O.D.	1.315	1.660	1.900
Fittings I.D.	1.330	1.675	1.920

Elbow

Item No.	Pipe Size	Price Each
RF-101	1	11.45
RF-102	1 1/4	13.97
RF-103	1 1/2	18.65



Tee

Item No.	Pipe Size	Price Each
RF-111	1	9.43
RF-112	1 1/4	11.22
RF-113	1 1/2	15.11



Cross

Item No.	Pipe Size	Price Each
RF-121	1	18.59
RF-122	1 1/4	21.73
RF-123	1 1/2	26.62



Side Outlet Elbow

Item No.	Pipe Size	Price Each
RF-131	1	15.51
RF-132	1 1/4	20.28
RF-133	1 1/2	20.10



Side Outlet Tee

Item No.	Pipe Size	Price Each
RF-141	1	17.37
RF-142	1 1/4	21.59
RF-143	1 1/2	25.16



Side Outlet Cross

Item No.	Pipe Size	Price Each
RF-151	1	21.70
RF-152	1 1/4	25.48
RF-153	1 1/2	30.68



Adjustable Elbow or Tee

Item No.	Pipe Size	Price Each
RF-161	1	20.77
RF-162	1 1/4	21.62
RF-163	1 1/2	25.25



Adjustable Cross

Item No.	Pipe Size	Price Each
RF-171	1	32.82
RF-172	1 1/4	39.63
RF-173	1 1/2	42.94



Adjustable Tee or Cross

Item No.	Pipe Size	Price Each
RF-183	1 1/2	31.27
RF-182	1 1/4	29.18



Adjustable Side Outlet Elbow/Tee

Item No.	Pipe Size	Price Each
RF-191	1	25.07
RF-193	1 1/2	33.80



Adjustable Swivel

Item No.	Pipe Size	Price Each
RF-202	1 1/4	34.74
RF-203	1 1/2	36.26



Offset Cross

Item No.	Pipe Size	Price Each
RF-211	1	23.85
RF-212	1 1/4	24.77
RF-213	1 1/2	27.35



Tee with Ridge

Item No.	Pipe Size	Price Each
RF-221	1	13.98
RF-222	1 1/4	16.94
RF-223	1 1/2	21.70



Plug for Fitting

Item No.	Pipe Size	Price Each
RF-232	1 1/4	5.06
RF-233	1 1/2	6.04



Plug for Pipe

Item No.	Pipe Size	Price Each
RF-241	1	4.68
RF-242	1 1/4	5.06
RF-243	1 1/2	5.36



Round Wall Flange

Item No.	Pipe Size	Price Each
RF-271	1	14.88
RF-272	1 1/4	17.34



Heavy Duty Floor Flange

Item No.	Pipe Size	Price Each
RF-283	1 1/2	22.47



Round Flange

Item No.	Pipe Size	Price Each
RF-292	1 1/4	15.74
RF-293	1 1/2	18.30



Rectangular Wall Flange

Item No.	Pipe Size	Price Each
RF-302	1 1/4	35.30
RF-303	1 1/2	35.82



Rectangular Base Flange

Item No.	Pipe Size	Price Each
RF-311	1	12.49
RF-312	1 1/4	15.18
RF-313	1 1/2	17.88



Adjustable Wall Flange

Item No.	Pipe Size	Price Each
RF-321	1	19.22
RF-322	1 1/4	21.41
RF-323	1 1/2	23.41



Coupling

Item No.	Pipe Size	Price Each
RF-331	1	10.84
RF-332	1 1/4	12.35
RF-333	1 1/2	15.59



Adjustable Elbow

Item No.	Pipe Size	Price Each
RF-352	1 1/4	28.11



ALUMINUM EXTRUSIONS

These extruded profiles are the basic building blocks of the structural systems. Profiles can be ordered in standard lengths or cut to your exact specifications (with a minimal cutting charge added), allowing you the choice of fabricating them yourself with simple hand tools or having them delivered to your door, pre-cut. All profiles are made of 6105-T5 aluminum with a clear anodized finish. Black anodized finish is available as a special order. We sell the entire line of 80/20 products; call for pricing and delivery.

**10 Series Fractional Profiles with "Align-a-Grooves"**  
Compatibility Code: 6-10

**80/20® Inc.**  
The Industrial Erector Set®



**1010 1" x 1"**

Item No.	Length	Price Each
AES-1010	Per Inch	<b>0.23</b>
AES-1010-97	97"	<b>22.31</b>
AES-1010-145	145"	<b>33.34</b>
AES-1010-242	242"	<b>55.66</b>



**1012 1" x 1"**

Item No.	Length	Price Each
AES-1012	Per Inch	<b>0.20</b>
AES-1012-145	145"	<b>29.00</b>
AES-1012-242	242"	<b>48.40</b>



**2020 2" x 2"**

Item No.	Length	Price Each
AES-2020	Per Inch	<b>0.57</b>
AES-2020-145	145"	<b>82.64</b>
AES-2020-242	242"	<b>137.94</b>



**1020 1" x 2"**

Item No.	Length	Price Each
AES-1020	Per Inch	<b>0.39</b>
AES-1020-97	97"	<b>37.83</b>
AES-1020-145	145"	<b>56.54</b>
AES-1020-242	242"	<b>94.37</b>



**1030 1" x 3"**

Item No.	Length	Price Each
AES-1030	Per Inch	<b>0.55</b>
AES-1030-145	145"	<b>79.74</b>
AES-1030-242	242"	<b>133.10</b>



**2040 2" x 4"**

Item No.	Length	Price Each
AES-2040	Per Inch	<b>1.05</b>
AES-2040-145	145"	<b>152.24</b>
AES-2040-242	242"	<b>254.10</b>

**15 Series Fractional Profiles with "Align-a-Grooves"**  
Compatibility Code: 8-15



**1515-UL 1.5" x 1.5"**

Item No.	Length	Price Each
AES-1515-UL	Per Inch	<b>0.39</b>
AES-1515-145-UL	145"	<b>56.55</b>
AES-1515-242-UL	242"	<b>94.38</b>



**1515-Lite 1.5" x 1.5"**

Item No.	Length	Price Each
AES-1515-97L	97"	<b>43.65</b>
AES-1515-145L	145"	<b>65.24</b>
AES-1515-242L	242"	<b>108.90</b>



**1515 1.5" x 1.5"**

Item No.	Length	Price Each
AES-1515	Per Inch	<b>0.53</b>
AES-1515-97	97"	<b>51.41</b>
AES-1515-145	145"	<b>76.84</b>
AES-1515-242	242"	<b>128.26</b>



**3030-Lite 3" x 3"**

Item No.	Length	Price Each
AES-3030-LITE	Per Inch	<b>1.20</b>
AES-3030-145L	145"	<b>174.00</b>
AES-3030-242L	242"	<b>290.40</b>



**1530-Lite 1.5" x 3"**

Item No.	Length	Price Each
AES-1530-145L	145"	<b>118.90</b>
AES-1530-242L	242"	<b>198.44</b>
AES-1530-97L	97"	<b>79.54</b>



**1530 1.5" x 3"**

Item No.	Length	Price Each
AES-1530	Per Inch	<b>0.93</b>
AES-1530-97	97"	<b>90.21</b>
AES-1530-145	145"	<b>134.84</b>
AES-1530-242	242"	<b>225.06</b>



**1545 1.5" x 4.5"**

Item No.	Length	Price Each
AES-1545	Per Inch	<b>1.40</b>
AES-1545-145	145"	<b>203.00</b>
AES-1545-242	242"	<b>338.80</b>



**3030 3" x 3"**

Item No.	Length	Price Each
AES-3030	Per Inch	<b>1.50</b>
AES-3030-145	145"	<b>217.50</b>
AES-3030-242	242"	<b>363.00</b>

Note: A cutting charge applies to all profiles not of stock length. Due to custom cutting no returns can be made. We can help you with the ENTIRE 80/20 line of products. Please call customer service for more information.

**ALUMINUM EXTRUSIONS**

These extruded profiles are the basic building blocks of the structural systems. Profiles can be ordered in standard lengths or cut to your exact specifications (with a minimal cutting charge added), allowing you the choice of fabricating them yourself with simple hand tools or having them delivered to your door, pre-cut. All profiles are made of 6105-T5 aluminum with a clear anodized finish. Black anodized finish is available as a special order. We sell the entire line of 80/20 products; call for pricing and delivery.

**15 Series Smooth Fractional Profiles**  
Compatibility Code: 8-15

**80/20® Inc.**  
The Industrial Erector Set®



**1515-ULS 1.5" x 1.5"**

Item No.	Length	Price Each
AES-1515-ULS	Per Inch	<b>0.39</b>
AES-1515-145ULS	145"	<b>56.55</b>
AES-1515-242ULS	242"	<b>94.38</b>



**1515-LS 1.5" x 1.5"**

Item No.	Length	Price Each
AES-1515-145-LS	145"	<b>65.25</b>
AES-1515-242-LS	242"	<b>108.90</b>



**1515-S 1.5" x 1.5"**

Item No.	Length	Price Each
AES-1515-S	Per Inch	<b>0.53</b>
AES-1515-145-S	145"	<b>76.85</b>
AES-1515-242-S	242"	<b>128.26</b>



**1517-LS 1.5" x 1.5"**

Item No.	Length	Price Each
AES-1517-LS	Per Inch	<b>0.38</b>
AES-1517-145-LS	145"	<b>55.10</b>



**1501-LS 1.5" x 1.5"**

Item No.	Length	Price Each
AES-1501-LS	Per Inch	<b>0.45</b>
AES-1501-145-LS	145"	<b>65.25</b>
AES-1501-242-LS	242"	<b>108.90</b>



**1502-LS 1.5" x 1.5"**

Item No.	Length	Price Each
AES-1502-LS	Per Inch	<b>0.45</b>
AES-1502-145-LS	145"	<b>65.25</b>
AES-1502-242-LS	242"	<b>108.90</b>



**1503-LS 1.5" x 1.5"**

Item No.	Length	Price Each
AES-1503-LS	Per Inch	<b>0.45</b>
AES-1503-145-LS	145"	<b>65.25</b>
AES-1503-242-LS	242"	<b>108.90</b>



**1504-LS 1.5" x 1.5"**

Item No.	Length	Price Each
AES-1504-LS	Per Inch	<b>0.45</b>
AES-1504-145-LS	145"	<b>65.25</b>
AES-1504-242-LS	242"	<b>108.90</b>



**1530-LS 1.5" x 3"**

Item No.	Length	Price Each
AES-1530-LS	Per Inch	<b>0.82</b>
AES-1530-145-LS	145"	<b>118.90</b>
AES-1530-242-LS	242"	<b>198.44</b>



**1530-S 1.5" x 3"**

Item No.	Length	Price Each
AES-1530-S	Per Inch	<b>0.93</b>
AES-1530-145-S	145"	<b>134.85</b>
AES-1530-242-S	242"	<b>225.06</b>



**1545-S 1.5" x 4.5"**

Item No.	Length	Price Each
AES-1545-S	Per Inch	<b>1.40</b>
AES-1545-145-S	145"	<b>203.00</b>
AES-1545-242-S	242"	<b>338.80</b>



**3030-LS 3" x 3"**

Item No.	Length	Price Each
AES-3030-LS	Per Inch	<b>1.20</b>
AES-3030-145-LS	145"	<b>174.00</b>
AES-3030-242-LS	242"	<b>290.40</b>



**3030-S 3" x 3"**

Item No.	Length	Price Each
AES-3030-S	Per Inch	<b>1.50</b>
AES-3030-145-S	145"	<b>217.50</b>
AES-3030-242-S	242"	<b>363.00</b>

**Note:** A cutting charge applies to all profiles not of stock length. Due to custom cutting no returns can be made.

We can help you with the ENTIRE 80/20 line of products. Please call customer service for more information.

ALUMINUM EXTRUSIONS

These extruded profiles are the basic building blocks of the structural systems. Profiles can be ordered in standard lengths or cut to your exact specifications (with a minimal cutting charge added), allowing you the choice of fabricating them yourself with simple hand tools or having them delivered to your door, pre-cut. All profiles are made of 6105-T5 aluminum with a clear anodized finish. Black anodized finish is available as a special order. We sell the entire line of 80/20 products; call for pricing and delivery.

**80/20® Inc.**  
The Industrial Erector Set®

**20 Series Smooth Metric Profiles**  
Compatibility Code: 5-20



**20-2020 20mm x 20mm**

Item No.	Length	Price Each
AES-20-2020-4	4.0 m	25.20
AES-20-2020-6	6.0 m	37.80



**20-2040 20mm x 40mm**

Item No.	Length	Price Each
AES-20-2040	Per mm	0.01
AES-20-2040-4	4.0 m	44.00
AES-20-2040-6	6.0 m	66.00



**20-4040 40mm x 40mm**

Item No.	Length	Price Each
AES-20-4040	Per mm	0.02
AES-20-4040-4	4.0 m	76.00
AES-20-4040-6	6.0 m	114.00

**25 Series Smooth Metric Profiles**  
Compatibility Code: 6-25



**25-2525 25mm x 25mm**

Item No.	Length	Price Each
AES-25-2525-4	4.0 m	33.60
AES-25-2525-6	6.0 m	50.40



**25-2550 25mm x 50mm**

Item No.	Length	Price Each
AES-25-2550-4	4.0 m	46.40
AES-25-2550-6	6.0 m	69.60



**25-2576 25mm x 75mm**

Item No.	Length	Price Each
AES-25-2576-4	4.0 m	82.40
AES-25-2576-6	6.0 m	123.60



**25-5050 50mm x 50mm**

Item No.	Length	Price Each
AES-25-5050-4	4.0 m	88.40
AES-25-5050-6	6.0 m	132.60



**25-5010 50mm x 100mm**


Item No.	Length	Price Each
AES-25-5010-4	4.0 m	155.60
AES-25-5010-6	6.0 m	233.40

**30 Series Smooth Metric Profiles**  
Compatibility Code: 8-30




**30-3030 30mm x 30mm**

Item No.	Length	Price Each
AES-30-3030-4	4.0 m	38.00
AES-30-3030-6	6.0 m	57.00



**30-3060 30mm x 60mm**

Item No.	Length	Price Each
AES-30-3060	Per mm	0.02
AES-30-3060-4	4.0 m	88.00
AES-30-3060-6	6.0 m	132.00



**30-6060 60mm x 60mm**

Item No.	Length	Price Each
AES-30-6060	Per mm	0.04
AES-30-6060-4	4.0 m	148.00
AES-30-6060-6	6.0 m	222.00

**Note:** A cutting charge applies to all profiles not of stock length. Due to custom cutting no returns can be made. We can help you with the ENTIRE 80/20 line of products. Please call customer service for more information.



ALUMINUM EXTRUSIONS

Buy One or Buy Bulk & **SAVE!**

These extruded profiles are the basic building blocks of the structural systems. Profiles can be ordered in standard lengths or cut to your exact specifications (with a minimal cutting charge added), allowing you the choice of fabricating them yourself with simple hand tools or having them delivered to your door, pre-cut. All profiles are made of 6105-T5 aluminum with a clear anodized finish. Black anodized finish is available as a special order. We sell the entire line of 80/20 products; call for pricing and delivery.

**40 Series Smooth Metric Profiles**  
Compatibility Code: 8-40

**80/20® Inc.**  
The Industrial Erector Set®



**40-4040-Lite 40mm x 40mm**

Item No.	Length	Price Each
AES-40-4040-4L	4.0 m	80.00
AES-40-4040-6L	6.0 m	120.00



**40-4040 40mm x 40mm**

Item No.	Length	Price Each
AES-40-4040-4	4.0 m	96.00
AES-40-4040-6	6.0 m	144.00



**40-4045-Lite 40mm x 40mm**

Item No.	Length	Price Each
AES-40-4045L	Per mm	0.02
AES-40-4045-4L	4.0 m	67.20
AES-40-4045-6L	6.0 m	100.80



**40-4093 40mm**

Item No.	Length	Price Each
AES-40-4093	Per mm	0.02
AES-40-4093-4	4.0 m	64.00



**40-4094 40mm**

Item No.	Length	Price Each
AES-40-4094	Per mm	0.02
AES-40-4094-4	4.0 m	84.00



**40-4096 40mm**

Item No.	Length	Price Each
AES-40-4096	Per mm	0.03
AES-40-4096-4	4.0 m	100.00



**40-4082-LITE 40mm x 80mm**

Item No.	Length	Price Each
AES-40-4082L	Per mm	0.04
AES-40-4082-4L	4m	142.80



**40-4083-LITE 40mm x 80mm**

Item No.	Length	Price Each
AES-40-4083L	Per mm	0.04
AES-40-4083-4L	4m	142.80



**40-4084-LITE 40mm x 80mm**

Item No.	Length	Price Each
AES-40-4084L	Per mm	0.04
AES-40-4084-4L	4m	142.80



**40-4085-LITE 40mm x 80mm**

Item No.	Length	Price Each
AES-40-4085L	Per mm	0.04
AES-40-4085-4L	4m	142.80



**40-4080-Lite 40mm x 80mm**

Item No.	Length	Price Each
AES-40-4080-4L	4.0 m	142.80
AES-40-4080-6L	6.0 m	214.20



**40-4080 40mm x 80mm**

Item No.	Length	Price Each
AES-40-4080-4	4.0 m	168.00
AES-40-4080-6	6.0 m	252.00




**40-8080 80mm x 80mm**

Item No.	Length	Price Each
AES-40-8080-4	4.0 m	252.00
AES-40-8080-6	6.0 m	378.00


**Note:** A cutting charge applies to all profiles not of stock length. Due to custom cutting no returns can be made.

We can help you with the ENTIRE 80/20 line of products. Please call customer service for more information.

Economy Slide-in T-Nuts



**A - Slide-In Economy T-Nuts**



**B - Slide-In Double Economy T-Nuts**





**C - Roll-In T-Nuts with Set Screw**




**D - Roll-In T-Nuts with Flexible Handle**







**E - Drop-In T-Nuts**



**G - Roll-In T-Nuts with Ball Spring**



**F - Roll-In T-Nuts**



Item No.	Series	Compatibility Code	Style	Description	Material	Thread	Price Each
AES-3280	10	6-10	B	Slide-in Double Economy T-Nut	Zinc-Plated Carbon Steel	1/4-20	0.69
AES-3313	10	6-10	C	Roll-in T-Nut with Set Screw	Zinc-Plated Carbon Steel	1/4-20	2.40
AES-3376	10	6-10	D	Roll-in T-Nut with Flexible Handle	Zinc-Plated Carbon Steel	1/4-20	1.70
AES-3785	10	6-10	A	Slide-in Economy T-Nut	Plated Carbon Steel	1/4-20	0.27
AES-3278	15	8-15	A	Slide-in Economy T-Nut	Plated Carbon Steel	5/16-18	0.27
AES-3279	15	8-15	B	Slide-in Double Economy T-Nut	Zinc-Plated Carbon Steel	5/16-18	0.79
AES-3282	15	8-15	D	Roll-in T-Nut with Flexible Handle	Zinc-Plated Carbon Steel	5/16-18	1.86
AES-3283	15	8-15	D	Roll-in T-Nut with Flexible Handle	Zinc-Plated Carbon Steel	1/4-20	1.85
AES-3286	15	8-15	A	Slide-in Economy T-Nut	Plated Carbon Steel	1/4-20	0.21
AES-3311	15	8-15	C	Roll-in T-Nut with Set Screw	Zinc-Plated Carbon Steel	5/16-18	2.40
AES-25-1961	25	6-25	A	Slide-in Economy T-Nut	Plated Carbon Steel	M6 x 1.00	0.27
AES-25-1962	25	6-25	B	Slide-in Double Economy T-Nut	Zinc-Plated Carbon Steel	M6 x 1.00	0.53
AES-25-1966	25	6-25	D	Roll-in T-Nut with Flexible Handle	Zinc-Plated Carbon Steel	M6 x 1.00	1.75
AES-25-3313	25	6-25	C	Roll-in T-Nut with Set Screw	Zinc-Plated Carbon Steel	M6 x 1.00	2.40
AES-40-1961	40	8-40	A	Slide-in Economy T-Nut	Plated Carbon Steel	M6 x 1.00	0.27
AES-40-1966	40	8-40	D	Roll-in T-Nut with Flexible Handle	Zinc-Plated Carbon Steel	M6 x 1.00	1.90
AES-40-1968	40	8-40	C	Roll-in T-Nut with Set Screw	Zinc-Plated Carbon Steel	M6 x 1.00	2.55
AES-40-1981	40	8-40	A	Slide-in Economy T-Nut	Plated Carbon Steel	M8 x 1.25	0.32
AES-40-1982	40	8-40	B	Slide-in Double Economy T-Nut	Zinc-Plated Carbon Steel	M8 x 1.25	0.84
AES-40-1986	40	8-40	D	Roll-in T-Nut with Flexible Handle	Zinc-Plated Carbon Steel	M8 x 1.25	1.90
AES-40-1988	40	8-40	C	Roll-in T-Nut with Set Screw	Zinc-Plated Carbon Steel	M8 x 1.25	2.55
AES-13060	45	10-45	F	Roll-in T-Nut	Zinc-Plated Steel	M6	1.40
AES-13062	45	10-45	F	Roll-in T-Nut	Zinc-Plated Steel	M8	1.40
AES-13083	20	5-20	G	Roll-in T-Nut with Ball Spring	Zinc-Plated Steel/Stainless Steel	M4	1.20
AES-13084	20	5-20	G	Roll-in T-Nut with Ball Spring	Zinc-Plated Steel/Stainless Steel	M5	1.20
AES-13092	30	8-30	F	Roll-in T-Nut	Zinc-Plated Steel	M6	1.40
AES-13094	30	8-30	F	Roll-in T-Nut	Zinc-Plated Steel	M8	1.40
AES-13110	30	8-30	E	Drop-in T-Nut, Blue	Blue Plated Steel	1/4-20	0.74
AES-13115	30	8-30	E	Drop-in T-Nut, Black	Black Plated Steel	M5	0.74
AES-13117	30	8-30	E	Drop-in T-Nut, Yellow	Yellow Plated Steel	M6	0.74
AES-13120	45	10-45	E	Drop-in T-Nut, Blue	Blue Plated Steel	1/4-20	0.74
AES-13124	45	10-45	E	Drop-in T-Nut, Blue	Blue Plated Steel	5/16-18	0.74
AES-13132	45	10-45	E	Drop-in T-Nut, Blue	Blue Plated Steel	M6	0.74

Bolt Assemblies

**80/20® Inc.**  
The Industrial Erector Set®



Economy T-Nut



Button Head Socket Cap Screw



Flanged Button Head Socket Cap Screw



Socket Head Cap Screw

Fractional is steel with black zinc. Metric has a blue coating.

Item No.	Series	Compatibility Code	Tool Size Reference	Description	Price Each
<b>Inch</b>					
AES-3017	10	6-10	—	1/4-20 x 1 Low Head Socket Cap Screw	0.53
AES-3064	10	6-10	3/16	1/4-20 x 3/4 Socket Head Cap Screw	0.21
AES-3321	10	6-10	5/32	1/4-20 x 1/2 Flanged Button Head Socket Cap Screw and 5/16 T-Nut	0.50
AES-3386	10	6-10	5/32	1/4-20 x 3/8 Flanged Button Head Socket Cap Screw and Econ T-Nut	0.46
AES-3393	10	6-10	5/32	1/4-20 x 1/2 Button Head Socket Cap Screw and Econ T-Nut	0.40
AES-3457	10	6-10	5/32	10-32 x 3/8 Socket Head Cap Screw and Econ Slide-In T-Nut	0.32
AES-3471	10	6-10	3/16	1/4-20 x 7/8 Socket Head Cap Screw, Econ T-Nut and Washer	0.73
AES-3491	10	6-10	3/16	1/4-20 x 1/2 Socket Head Cap Screw and Econ Slide-In T-Nut	0.37
AES-3018	15	8-15	—	5/16-18 x 1 1/4 Low Head Socket Cap Screw	0.63
AES-3122	15	8-15	1/4	5/16-18 x 1 Socket Head Cap Screw	0.30
AES-3320	15	8-15	1/4	5/16-18 x 1 1/16 Socket Head Cap Screw and 5/16 T-Nut	0.60
AES-3421	15	8-15	1/4	5/16-18 x 1 1/4 Socket Head Cap Screw, Econ T-Nut and Washer	0.68
AES-3456	15	8-15	1/4	5/16-18 x 5/8 Socket Head Cap Screw and Slide-In T-Nut	2.05
AES-3470	15	8-15	1/4	5/16-18 x 1 Socket Head Cap Screw, Econ T-Nut and Washer	0.61
<b>Metric</b>					
AES-75-3572	20	5-20	3mm	M5 x 10mm Flanged Head Socket Cap Screw	0.47
AES-75-3581	20	5-20	3mm	M5 x 8mm Button Head Socket Cap Screw and Econ Slide-In T-Nut	0.53
AES-11-6518	25	6-25	5mm	M6 x 18mm Socket Head Cap Screw	0.37
AES-75-3401	25	6-25	4mm	M5 x 10mm Socket Head Cap Screw and Econ Slide-In T-Nut	0.40
AES-75-3404	25	6-25	4mm	M6 x 1.00 Button Head Socket Cap Screw and 5/16 T-Nut	0.45
AES-75-3592	25	6-25	5mm	M6 x 14mm Flanged Head Socket Cap Screw	1.27
AES-11-8320	30	8-30	5mm	M8 x 20mm Button Head Socket Cap Screw	0.41
AES-11-8525	30, 40, 45	8-30, 8-40, 10-45	6mm	M8 x 25mm Socket Head Cap Screw	0.37
AES-75-3585	30	8-30	4mm	M6 x 14mm Flanged Head Socket Cap Screw	1.00
AES-75-3590	30	8-30	5mm	M6 x 10mm Socket Head Cap Screw	0.95
AES-75-3593	30	8-30	5mm	M6 x 14mm Socket Head Cap Screw and Drop-In T-Nut	1.00
AES-75-3595	30	8-30	5mm	M6 x 16mm Socket Head Cap Screw and Drop-In T-Nut	1.10
AES-75-3600	30	8-30	4mm	M6 x 12mm Button Head Socket Cap Screw and Drop-In T-Nut	1.15
AES-11-8325	40	8-40	5mm	M8 x 25mm Button Head Socket Cap Screw	0.34
AES-13-8525	40	8-40	6mm	M8 x 25mm Socket Head Cap Screw	0.34
AES-75-3422	40	8-40	5mm	M8 x 1.25 x 16mm Button Head Socket Cap Screw and 5/16 T-Nut	0.67
AES-75-3625	40	8-40	6mm	M8 x 16mm Socket Head Cap Screw and Slide-In T-Nut	1.90
AES-75-3627	40	8-40	6mm	M8 x 18mm Socket Head Cap Screw and Slide-In T-Nut	1.92
AES-13003	45	10-45	—	M12 x 30mm Button Head Socket Cap Screw	1.60
AES-14196	45	10-45	—	Threaded Insert	1.35
AES-75-3619	45	10-45	5mm	M8 x 18mm Button Head Socket Cap Screw and Drop-In T-Nut	1.15
AES-75-3623	45	10-45	—	M12 x 30mm Button Head Socket Cap Screw	1.05
AES-75-3630	45	10-45	6mm	M8 x 20mm Socket Head Cap Screw and Drop-In T-Nut	1.05

Trust The  
**EXPERTS!**

Personal & Knowledgeable Service  
Trusted & Leading Brands  
Quality Components  
Application Expertise



STRUCTURAL SYSTEMS ACCESSORIES

**Anchor Fasteners**

**80/20® Inc.**  
The Industrial Erector Set®



A flush, vibration proof fastening option allowing infinite positioning along the T-slotted profile. Counterbore machining required. **Use with 10, 15, 20, 25, 30 and 40 Series profiles.**

Item No.	Series	Compatibility Code	Thread Size	Price Each
<b>Inch</b>				
AES-3395	10	6-10	10-32	2.90
AES-3360	15	8-15	5/16-18	3.15
<b>Metric</b>				
AES-13184	20	5-20	M5	2.85
AES-25-3896	25	6-25	M5	3.10
AES-13186	30	8-30	M6	2.85
AES-40-3897	40	8-40	M8	3.25

**End Fasteners**

**80/20® Inc.**  
The Industrial Erector Set®







Provides a clean, hidden method of connecting profiles at 90 degrees. Mounting profile requires end tap machining; mating profile requires access hole. **Use with 10, 15, 20, 25 and 40 Series profiles.**

Item No.	Series	Compatibility Code	Thread Size	Price Each
<b>Inch</b>				
AES-3381	10	6-10	1/4-20	1.50
AES-3380	15	8-15	5/16-18	1.60
<b>Metric</b>				
AES-20-3895	20	5-20	M5 x 12	1.10
AES-25-3895	25	6-25	M6 x 1.00	1.55
AES-40-3891	40	8-40	M8 x 1.25	1.65

**Double Anchor Fasteners**

**80/20® Inc.**  
The Industrial Erector Set®



A flush, vibration proof fastening option allowing infinite positioning along the T-slotted profile. Counterbore machining required. Anchor counterbore details provided in the line drawings. **Use with 10, 15, 25 and 40 Series profiles.**

Short		Long		Series	Compatibility Code	Thread Size
Item No.	Price Each	Item No.	Price Each			
<b>Inch</b>						
AES-3090	5.25	AES-3092	5.55	10	6-10	10-32
AES-3098	5.80	AES-3099	6.05	15	8-15	5/16-18
<b>Metric</b>						
AES-25-3094	5.25	AES-25-3096	5.55	25	6-25	M5
AES-40-3100	5.80	AES-40-3102	6.05	40	8-40	M8

**2-Hole Inside Corner Brackets**

**80/20® Inc.**  
The Industrial Erector Set®



Two Hole Inside Corner (Inch)

Two Hole Inside Corner (Metric)

Item No.	Series	Compatibility Code	Description	Price Each	Mounting Hardware	Price Each
<b>Inch</b>						
AES-4108	10	6-10	Two hole inside corner bracket 1 x 1	2.75	(2) AES-3386	0.46
AES-4132	10	6-10	Two hole gusset inside corner bracket 1 x 1	3.95	(2) AES-3393	0.40
AES-4302	15	8-15	Two hole inside corner bracket 1 1/2 x 1 1/2	2.95	(2) AES-3320	0.60
AES-4332	15	8-15	Two hole gusset inside corner bracket 1 1/2 x 1 1/2	4.30	(2) AES-3320	0.60
<b>Metric</b>						
AES-25-4108	25	6-25	Two hole inside corner bracket 25 x 25mm	2.75	(2) AES-75-3404	0.45
AES-25-4132	25	6-25	Two hole gusset inside corner bracket 25 x 25mm	3.95	(2) AES-75-3404	0.45
AES-14073	30	8-30	Two hole inside corner	2.10	(2) AES-75-3593	1.00
AES-40-4302	40	8-40	Two hole inside corner bracket 40 x 40mm	2.95	(2) AES-75-3422	0.67
AES-40-4332	40	8-40	Two hole gusset inside corner bracket 40 x 40mm	4.30	(2) AES-75-3422	0.67
AES-14076	40	8-40	Two hole inside corner	2.85	(2) AES-75-3627	1.92
AES-14085	45	10-45	Two hole inside corner	2.85	(2) AES-75-3630	1.05
<b>Inch</b>						
AES-14061	10	6-10	Two hole inside corner	0.74	(2) AES-3457	0.32
	20	5-20				
	25	6-25				

4- and 8-Hole Inside Corner Brackets

**80/20® Inc.**  
The Industrial Erector Set®



**90-Degree Inside Corner (Inch)**      **Four Hole Inside Corner (Inch or Metric)**      **Four Hole Gusset Inside Corner (Inch or Metric)**      **Four Hole Inside Corner\* (Metric)**      **Eight Hole Gusset Inside Corner (Inch)**      **Eight Hole Inside Corner Bracket (Metric)**

Item No.	Series	Compatibility Code	Description	Price Each
<b>Inch</b>				
AES-4115	10	6-10	Four hole inside corner bracket 1 x 2	4.05
AES-4136	10	6-10	Four hole gusset inside corner bracket 1 x 2	5.65
AES-4138	10	6-10	Eight hole gusset inside corner bracket 2 x 2	7.45
AES-3368	15	8-15	90 degree inside corner	6.30
AES-4301	15	8-15	Four hole inside corner bracket 1½ x 3	4.30
AES-4336	15	8-15	Four hole gusset inside corner bracket 1½ x 3	6.25
AES-4338	15	8-15	Eight hole gusset inside corner bracket 3 x 3	8.95
<b>Metric</b>				
AES-14057*	20	5-20	Four hole inside corner bracket 20 x 40mm	1.80
AES-25-4115	25	6-25	Four hole inside corner bracket 25 x 50mm	4.05
AES-25-4136	25	6-25	Four hole gusset inside corner bracket 25 x 50mm	5.65
AES-25-4138	25	6-25	Eight hole gusset inside corner bracket 50 x 50mm	7.45
AES-14070*	30	8-30	Four hole inside corner bracket 30 x 60mm	2.95
AES-40-4301	40	8-40	Four hole inside corner bracket 40 x 80mm	4.30
AES-40-4336	40	8-40	Four hole gusset inside corner bracket 40 x 80mm	6.25
AES-40-4338	40	8-40	Eight hole gusset inside corner bracket 80 x 80mm	8.95
AES-14088*	45	10-45	Four hole inside corner bracket 45 x 90mm	6.45
AES-14111	45	10-45	Eight hole inside corner bracket 90 x 90mm	8.75

Joining Strips and Plates


**80/20® Inc.**  
The Industrial Erector Set®



**Two Hole Joining Strip (Inch or Metric)**      **Three Hole Joining Strip (Metric)**      **Four Hole Joining Strip (Inch or Metric)**      **Seven Hole Cross Joining Plate (Metric)**      **Five Hole Joining Plate (Inch and Metric)**      **Five Hole Tee Joining Plate (Inch or Metric)**      **Eight Hole Tee Joining Plate (Metric)**

Item No.	Series	Compatibility Code	Description	Price Each
<b>Inch</b>				
AES-4107	10	6-10	Two hole joining strip .875 x 2	3.40
AES-4117	10	6-10	Four hole joining strip .875 x 4	4.80
AES-4140	10	6-10	Five hole tee joining plate 1 x 3	6.80
AES-4151	10	6-10	Five hole 90 degree joining plate 1 x 3	6.30
AES-4307	15	8-15	Two hole joining strip 1.490 x 3	3.45
AES-4305	15	8-15	Four hole joining strip 1.490 x 6	4.95
AES-4340	15	8-15	Five hole tee joining plate 1.5 x 4.5	7.80
AES-4351	15	8-15	Five hole 90 degree joining plate 1.5 x 4.5	7.10
<b>Metric</b>				
AES-25-4107	25	6-25	Two hole joining strip 22mm x 50mm	3.40
AES-25-4117	25	6-25	Four hole joining strip 22mm x 100mm	4.80
AES-25-4140	25	6-25	Five hole tee joining plate 25mm x 75mm	6.80
AES-25-4151	25	6-25	Five hole 90 degree joining plate 25mm x 75mm	6.30
AES-30-4307	30	8-30	Two hole joining strip 27mm x 60mm	3.40
AES-30-4306	30	8-30	Three hole joining strip 27mm x 90mm	4.35
AES-30-4335	30	8-30	Seven hole cross joining plate 90mm x 150mm	10.50
AES-30-4340	30	8-30	Five hole tee joining plate 30mm x 90mm	6.90
AES-30-4351	30	8-30	Five hole 90 degree joining plate 30mm x 90mm	6.60
AES-40-4307	40	8-40	Two hole joining strip 39.8mm x 80mm	3.45
AES-40-4305	40	8-40	Two hole joining strip 39.8mm x 160mm	4.95
AES-40-4340	40	8-40	Five hole tee joining plate 40mm x 120mm	7.80
AES-40-4351	40	8-40	Five hole 90 degree joining plate 40mm x 120mm	7.10
AES-45-4307	45	10-45	Two hole joining strip 42mm x 90mm	3.55
AES-45-4306	45	10-45	Three hole joining strip 42mm x 135mm	4.55
AES-45-4335	45	10-45	Seven hole cross joining plate 135mm x 225mm	11.45
AES-45-4351	45	10-45	Five hole 90 degree joining plate 45mm x 135mm	7.35
AES-45-4355	45	10-45	Eight hole tee joining plate 135mm x 180mm	9.75

45 Degree Supports



**80/20<sup>®</sup> Inc.**  
The Industrial Erector Set<sup>®</sup>



45 degree support maintains a clean, flush connection. Mounting hardware included.

6 inches		12 inches		Compatibility Code	Profile	Description
Item No.	Price Each	Item No.	Price Each			
AES-2565	13.90	AES-2570	15.34	6-10	AES-1010	(2) 1/4-20 x 3/8 Washers and Economy T-Nuts
AES-2566	14.95	AES-2567	16.40	6-10	AES-1020	(4) 1/4-20 x 3/8 Washer and Economy T-Nuts
AES-2525	16.15	AES-2535	19.80	8-15	AES-1515	(2) 3/16-18 x 3/4 Washer and Economy T-Nuts
AES-2530	20.35	AES-2540	26.35	8-15	AES-1530	(4) 3/16-18 x 3/4 Washer and Economy T-Nuts

160mm		320mm		Compatibility Code	Profile	Description
Item No.	Price Each	Item No.	Price Each			
AES-20-2565	11.80	AES-20-2570	12.80	5-20	AES-20-2020	(2) M5 x 12 Washer and Economy
AES-25-2565	13.90	AES-25-2570	15.34	6-25	AES-25-2525	(2) M6 x 16 Washers and Economy
AES-25-2566	14.95	AES-25-2567	16.40	6-25	AES-25-2550	(4) M6 x 16 Washer and Economy
AES-30-2565	15.00	AES-30-2570	16.60	8-30	AES-30-3030	(2) M8 x 16 Washer and Self-Aligning
AES-40-2525	16.15	AES-40-2535	19.80	8-40	AES-40-4040	(2) M8 x 18 Washer and Economy
AES-40-2530	20.35	AES-40-2540	26.35	8-40	AES-40-4080	(4) M8 x 18 Washer and Economy
AES-45-2525	16.40	AES-45-2535	20.25	10-45	AES-45-4545	(2) M8 x 20 Washer and Self-Aligning

Note: Fastener should be a socket head cap screw.

Aluminum Hinges

**80/20<sup>®</sup> Inc.**  
The Industrial Erector Set<sup>®</sup>



Use to mount heavier doors or hinge two profiles side by side. Clear anodized finish.

Item No.	Series	Compatibility Code	Size	Price Each
<b>Inch</b>				
AES-2086	10	6-10	2 x 2	6.15
AES-2085	15	8-15	3 x 3	8.00
<b>Metric</b>				
AES-25-2086	25	6-25	50.8 x 50.8 mm	6.15
AES-40-2085	40	8-40	76.2 x 76.2 mm	8.00

Die Cast Zinc Hinges

**80/20<sup>®</sup> Inc.**  
The Industrial Erector Set<sup>®</sup>



Use to mount heavier doors or hinge two profiles side by side. Black powder coat finish.

Item No.	Series	Compatibility Code	Size	Price Each
<b>Metric</b>				
AES-12255	20	5-20	40 x 40 mm	8.95
AES-12062	30	8-30	60 x 60 mm	11.15

Standard Plastic Hinges

**80/20<sup>®</sup> Inc.**  
The Industrial Erector Set<sup>®</sup>



Fiberglass-reinforced black nylon with stainless steel pin.

Item No.	Series	Compatibility Code	Size	Price Each
<b>Metric</b>				
AES-12067	20	5-20	30 x 39 mm	2.55
AES-12107	30	8-30	48 x 59 mm	5.05
AES-12134	45	10-45	48 x 87 mm	6.10

Heavy Duty Hinge Assemblies

**80/20<sup>®</sup> Inc.**  
The Industrial Erector Set<sup>®</sup>



Heavy duty hinge captivates door. Mounting hardware included.

Item No.	Series	Compatibility Code	Price Each
<b>Inch</b>			
AES-2066	10	6-10	20.80
AES-2106	15	8-15	19.50
<b>Metric</b>			
AES-25-2066	25	6-25	20.80
AES-40-2106	40	8-40	19.50

Black Plastic Door Handles

**80/20<sup>®</sup> Inc.**  
The Industrial Erector Set<sup>®</sup>



Bolts directly to doors and panels. Made of corrosion resistant, high-strength polycarbonate.

Item No.	Series	Compatibility Code	Size	Thread	Price Each
<b>Inch</b>					
AES-2062	10	6-10	4.41	1/4	4.20
AES-2061	15	8-15	5.47	5/16	6.85
AES-2060	15	8-15	7.75	5/16	8.40
<b>Metric</b>					
AES-25-2062	25	6-15	112.01	M6 x 1.0	3.70
AES-40-2061	40	8-40	138.94	M8 x 1.25	6.85
AES-40-2060	40	8-40	196.85	M8 x 1.25	8.40

**Roller Wheel Bracket Assemblies**

**80/20® Inc.**

*The Industrial Erector Set®*



Ideal for framed door. Assembly includes roller wheel bracket and mounting hardware.


Item No.	Series	Compatibility Code	Price Each
<b>Inch</b>			
AES-2751	10	6-10	<b>45.70</b>
AES-2755	15	8-15	<b>69.80</b>
<b>Metric</b>			
AES-25-2751	25	6-25	<b>45.70</b>
AES-40-2755	40	8-40	<b>69.80</b>

**Roller Wheels**

**80/20® Inc.**

*The Industrial Erector Set®*

Mounts to profile end or T-slot - ideal for guided linear motion. Made of self-lubricating black nylon. All mounting hardware included.



Item No.	Series	Compatibility Code	Price Each
<b>Inch</b>			
AES-2281	10	6-10	<b>15.00</b>
AES-2280	15	8-15	<b>25.60</b>
<b>Metric</b>			
AES-25-2281	25	6-25	<b>15.00</b>
AES-40-2280	40	8-40	<b>25.60</b>

**Deadbolt Latches**

**80/20® Inc.**

*The Industrial Erector Set®*



Positive, spring-loaded deadbolt, ideal for door enclosures. Stainless steel bolt, spring and handle; all mounting hardware included.

Item No.	Series	Compatibility Code	Degree	Price Each
<b>Inch</b>				
AES-2053	10, 15	6-10, 8-15	0	<b>18.90</b>
AES-2107	10, 15	6-10, 8-15	90	<b>18.90</b>
<b>Metric</b>				
AES-65-2053	25, 40	6-25, 8-40	0	<b>18.90</b>
AES-65-2107	25, 40	6-25, 8-40	90	<b>18.90</b>
AES-45-2053	45	10-45	0	<b>21.50</b>
AES-45-2107	45	10-45	90	<b>21.50</b>

**Top Mount Bi-fold Door Hanger Assemblies**

**80/20® Inc.**

*The Industrial Erector Set®*



Creates sliding or bi-fold doors without the use of a bottom rail; rotates freely as door pivots. Made of UHMW polyethylene.



Item No.	Series	Compatibility Code	Thread Size	Price Each
AES-2059	10	6-10	¼-20 x .410	<b>6.05</b>
AES-2051	15	8-15	⅜-18 x .760	<b>6.25</b>

**Single Mesh Panel Retainers**

**80/20® Inc.**

*The Industrial Erector Set®*


Strongest way to cost-effectively retain wire mesh or expanded metal panels. Panel is secured when tightened between a retainer and its threaded backing plate. Made of 6105-T5 clear anodized aluminum.

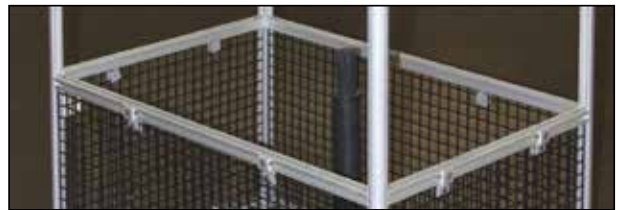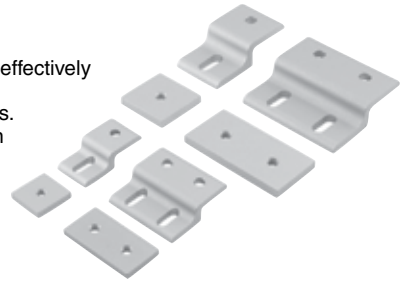



**Panel Retainers**

**80/20® Inc.**

*The Industrial Erector Set®*



Single



Double

Strongest way to cost-effectively retain plastic panels in a frame or separated by a profile. Requires a drill thru hole in the panel that lines up with retainer's tapped hole. Made of 6105-T5 clear anodized aluminum.


Item No.	Series	Compatibility Code	Type	Price Each
<b>Inch</b>				
AES-2496	10	6-10	10 Single	<b>3.95</b>
AES-2512	10	6-10	10 Double	<b>4.50</b>
AES-2434	15	8-15	15 Single	<b>4.15</b>
AES-2515	15	8-15	15 Double	<b>4.95</b>
<b>Metric</b>				
AES-25-2496	25	6-25	25 Single	<b>3.95</b>
AES-25-2512	25	6-25	25 Double	<b>4.50</b>
AES-40-2434	40	8-40	40 Single	<b>4.15</b>
AES-40-2515	40	8-40	40 Double	<b>4.95</b>

Item No.	Series	Compatibility Code	Price Each
<b>Inch</b>			
AES-2491	10	6-10	<b>4.50</b>
AES-2494	10	6-10	<b>8.70</b>
AES-2436	15	8-15	<b>5.25</b>
AES-2435	15	8-15	<b>10.34</b>
<b>Metric</b>			
AES-20-2491	20	5-20	<b>4.40</b>
AES-20-2494	20	5-20	<b>8.60</b>
AES-30-2436	30	8-30	<b>4.60</b>
AES-30-2435	30	8-30	<b>4.60</b>
AES-40-2436	40	8-40	<b>5.25</b>
AES-40-2435	40	8-40	<b>10.35</b>
AES-45-2436	45	10-45	<b>5.35</b>
AES-45-2435	45	10-45	<b>10.45</b>

STRUCTURAL SYSTEMS ACCESSORIES

Akro Bin® Hangers

**80/20® Inc.**  
The Industrial Erector Set®



Develop your own customized storage system. Mounts to T-slot. Mounting hardware included.

Item No.	Series	Compatibility Code	Price Each
<b>Inch</b>			
AES-2265	10, 15	6-10, 8-15	<b>8.20</b>
<b>Metric</b>			
AES-65-2264	25, 40	6-25, 8-40	<b>5.65</b>
AES-65-2265	25, 40	6-25, 8-40	<b>8.20</b>

Drop In Panel Brackets



Strong fastening brackets can be quickly and easily loaded from the face of the profile. No fastener required to mount bracket directly to profile. Made of 6105-T5 aluminum with clear anodized finish. Can be used as shelf brackets.

Item No.	Series	Compatibility Code	Price Each
<b>Inch/Metric</b>			
AES-2489	10, 25	6-10, 6-25	<b>3.50</b>
AES-2488	15, 40	8-15, 8-40	<b>3.95</b>

Tool Hangers

**80/20® Inc.**  
The Industrial Erector Set®



Ideal for hanging air tools, cable reels, heavy door panels or transporting cables. Slides into the profile end and moves easily in the T-slot. Made of high-strength black nylon. 100 lb capacity.

Item No.	Series	Compatibility Code	Price Each
<b>Inch</b>			
AES-2099	10	6-10	<b>8.40</b>
AES-2100	15	8-15	<b>10.80</b>
<b>Metric</b>			
AES-25-2099	25	6-25	<b>8.40</b>
AES-12016	30	8-30	<b>3.40</b>
AES-40-2100	40	8-40	<b>10.80</b>
AES-12015	45	10-45	<b>3.40</b>

End Caps

**80/20® Inc.**  
The Industrial Erector Set®



Gives your project the finishing touch. Made of high impact styrene. Push in fasteners included. Color black.

Item No.	Series	Description	Price Each
<b>Inch</b>			
AES-2015	10	AES-1010 End Cap 1 x 1	<b>1.05</b>
AES-2022	10	AES-1012 Quarter Round End Cap 1 x 1	<b>1.05</b>
AES-2025	10	AES-1020 End Cap 1 x 2	<b>1.35</b>
AES-2026	10	AES-1030 End Cap 1 x 3	<b>1.45</b>
AES-2028	10	AES-2020 End Cap 2 x 2	<b>1.55</b>
AES-2030	15	AES-1515/AES-1515-LITE End Cap 1.5 x 1.5	<b>1.35</b>
AES-2035	15	AES-1517 Quarter Round End Cap 1.5 x 1.5	<b>1.35</b>
AES-2045	15	AES-1530/AES-1530-LITE End Cap 1.5 x 3	<b>1.60</b>
AES-2046	15	AES-1545 End Cap 1.5 x 4.5	<b>1.75</b>
AES-2050	15	AES-3030 End Cap 3 x 3	<b>1.85</b>
AES-2036	15	AES-1575 End Cap .75 x 1.5	<b>1.70</b>
AES-2037	15	AES-3034 End Cap .75 x 3	<b>1.80</b>

Item No.	Series	Description	Price Each
<b>Metric</b>			
AES-12305	20	AES-20-2020 Push End Cap 20 x 20mm	<b>0.53</b>
AES-12306	20	AES-20-20 End Cap 20 x 20mm	<b>0.74</b>
AES-12307	20	AES-20-2040 End Cap 20 x 40mm	<b>0.84</b>
AES-25-2015	20	AES-25-2525 End Cap 25 x 25mm	<b>1.05</b>
AES-25-2025	25	AES-25-2550 End Cap 25 x 50mm	<b>1.35</b>
AES-25-2028	25	AES-25-5050 End Cap 50 x 50mm	<b>1.55</b>
AES-12271	30	AES-30-3030 Push-on End Cap 30 x 30mm	<b>0.74</b>
AES-12302	30	AES-30-3060 End Cap 30 x 60mm	<b>1.20</b>
AES-12303	30	AES-30-3060 End Cap 30 x 60mm	<b>1.70</b>
AES-40-2030	40	AES-40-4040/AES-40-4040-LITE End Cap 40 x 40mm	<b>1.35</b>
AES-40-2045	40	AES-40-4030-LITE End Cap 40 x 40mm	<b>1.60</b>
AES-40-2050	40	40-4045-LITE End Cap 40 x 40mm	<b>1.85</b>
AES-40-2033	40	AES-4080/AES-4080-LITE End Cap 40 x 80mm	<b>1.35</b>
AES-40-2035	40	AES-40-8080 End Cap 80 x 80mm	<b>1.40</b>
AES-12262	45	AES-45-4545 Push-on End Cap 45 x 45mm	<b>1.40</b>
AES-12259	45	AES-45-4545 End Cap 45 x 45mm	<b>2.00</b>
AES-12269	45	AES-45-4590 End Cap 45 x 90mm	<b>3.05</b>



**Adjustable Floor Brackets**

**80/20® Inc.**  
The Industrial Erector Set®



Height adjustable screw in front activates stop plate in the slot on the back of the bracket. Strong, economical method of mounting frame to floor. Die-cast zinc with black powder coat finish.

Item No.	Series	Compatibility Code	Dimensions	Price Each
AES-14003	15, 30, 40	8-15, 8-30, 8-40	45 x 120 x 30mm	<b>19.95</b>
AES-14009	45	10-45	60 x 160 x 38mm	<b>19.95</b>

**Floor Mount Plates**

**80/20® Inc.**  
The Industrial Erector Set®



Allows for vertical adjustment by bolting directly to T-slot. Strong, economical method of mounting frame to floor. Made of 6105-T5 clear anodized aluminum.

Item No.	Series	Compatibility Code	Width	Price Each
AES-2414	10	6-10	1	<b>8.15</b>
AES-2415	15	8-15	1.5	<b>10.24</b>
<b>Metric</b>				
AES-25-2414	25	6-25	25 mm	<b>8.15</b>
AES-40-2415	40	8-40	40 mm	<b>10.24</b>

**T-Slot Covers**



**Castors with Swivel and Wheel Lock**

**80/20® Inc.**  
The Industrial Erector Set®



Mounts directly to profile ends.

Item No.	Series	Compatibility Code	Dia.	Price Each
<b>Inch</b>				
AES-2311	10, 15	6-10, 8-15	3	<b>7.65</b>
<b>Metric</b>				
AES-65-2311	25, 40	6-25, 8-40	76.2 mm	<b>35.20</b>

**Leveling Caster**

**80/20® Inc.**  
The Industrial Erector Set®



Move and level your frame with one component. Available in two sizes with load capacity ranging from 300-600 lbs.

Item No.	Series	Compatibility Code	Price Each
<b>Inch</b>			
AES-2714	10, 15	6-10, 8-15	<b>58.80</b>
AES-2715	15	8-15	<b>86.10</b>
<b>Metric</b>			
AES-40-2715	40	8-40	<b>86.10</b>
AES-65-2714	25, 40	6-25, 8-40	<b>58.80</b>


**80/20® Inc.**  
The Industrial Erector Set®

Covers wires and tubes in T-slot and keeps dust out. Black, 7/2".

Item No.	Series	Compatibility Code	Length	Price Each
<b>Inch</b>				
AES-2113	10	6-10	7 1/2"	<b>3.45</b>
AES-2110	15	8-15	7 1/2"	<b>3.45</b>
<b>Metric</b>				
AES-12004	20	5-20	2m	<b>3.40</b>
AES-25-2113	25	6-25	1.8415m	<b>3.45</b>
AES-14193	30	8-30	2m	<b>4.75</b>
AES-40-2110	40	8-40	1.8415m	<b>3.45</b>
AES-12013	45	10-45	2m	<b>4.85</b>

**Height Adjustment Bolts with Counter Nuts  
Steel or Stainless Steel  
Metric**

Height adjustment bolts are used when working with positioning and alignment of motors, drive components and production lines. The counter-nut secures the given adjustment.




**NEW**

Item No.	B	D	D1	D2	F (kN)	H Min.	H Max.	M	N	Price Each
<b>Steel</b>										
1291564	5	M4	M15X1.0	25.0	40	33.0	43.0	2.0	4.0	74.11
1291565	5	M5	M15X1.0	25.0	40	33.0	43.0	2.0	4.0	74.11
1291566	5	M6	M15X1.0	25.0	40	33.0	43.0	2.0	4.0	74.11
1291567	6	M6	M20X1.0	32.0	65	41.0	55.0	2.0	4.0	80.51
1291568	6	M8	M20X1.0	32.0	65	41.0	55.0	2.0	4.0	80.51
1291569	6	M10	M20X1.0	32.0	65	41.0	55.0	2.0	4.0	80.51
1291570	7	M10	M30X1.5	45.0	120	49.0	67.0	2.0	5.0	86.93
1291571	7	M12	M30X1.5	45.0	120	49.0	67.0	2.0	5.0	86.93
1291572	7	M16	M30X1.5	45.0	120	49.0	67.0	2.0	5.0	86.93
1291573	9	M16	M40X1.5	58.0	210	63.0	86.0	2.5	6.0	102.38
1291574	9	M20	M40X1.5	58.0	210	63.0	86.0	2.5	6.0	106.49
1291575	9	M24	M40X1.5	58.0	210	63.0	86.0	2.5	6.0	106.49
1291576	11	M20	M50X1.5	70.0	330	77.0	106.0	2.5	6.0	206.27
1291577	11	M24	M50X1.5	70.0	330	77.0	106.0	2.5	6.0	206.27
1291578	11	M30	M50X1.5	70.0	330	77.0	106.0	2.5	6.0	198.33
<b>Stainless Steel</b>										
1291579	5	M4	M15X1.0	25.0	27.1	33.0	43.0	2.0	4.0	116.38
1291580	5	M5	M15X1.0	25.0	27.1	33.0	43.0	2.0	4.0	116.38
1291581	5	M6	M15X1.0	25.0	27.1	33.0	43.0	2.0	4.0	116.38
1291582	6	M6	M20X1.0	32.0	43.4	41.0	55.0	2.0	4.0	134.78
1291583	6	M8	M20X1.0	32.0	43.4	41.0	55.0	2.0	4.0	134.78
1291584	6	M10	M20X1.0	32.0	43.4	41.0	55.0	2.0	4.0	134.78
1291585	7	M10	M30X1.5	45.0	84	49.0	67.0	2.0	5.0	158.13
1291586	7	M12	M30X1.5	45.0	84	49.0	67.0	2.0	5.0	158.13
1291587	7	M16	M30X1.5	45.0	84	49.0	67.0	2.0	5.0	158.13
1291588	9	M16	M40X1.5	58.0	148	63.0	86.0	2.5	6.0	198.33
1291589	9	M20	M40X1.5	58.0	148	63.0	86.0	2.5	6.0	198.33
1291590	9	M24	M40X1.5	58.0	148	63.0	86.0	2.5	6.0	198.33
1291591	11	M20	M50X1.5	70.0	225	77.0	106.0	2.5	6.0	361.73
1291592	11	M24	M50X1.5	70.0	225	77.0	106.0	2.5	6.0	361.73
1291593	11	M30	M50X1.5	70.0	225	77.0	106.0	2.5	6.0	361.73

**Height Adjustment Bolts with Counter Nuts  
Steel or Stainless Steel  
Metric**

Level compensating bolts are used when working with positioning and alignment of motors, motor units, drive components and production lines. The advantage of a level compensating bolt is it's low height. Alignments can be quick and easily made, even if several ball-bearing positions are involved.

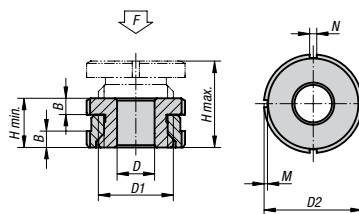

**NEW**

Item No.	B	D	D1	D2	F (kN)	H Min.	H Max.	M	N	Price Each
<b>Steel</b>										
1291594	5	M4	M15X1.0	25.0	40	15	19	2	4	58.36
1291595	5	M5	M15X1.0	25.0	40	15	19	2	4	58.36
1291596	5	M6	M15X1.0	25.0	40	15	19	2	4	58.36
1291597	6	M6	M20X1.0	32.0	65	18	23	2	4	61.82
1291598	6	M8	M20X1.0	32.0	65	18	23	2	4	61.82
1291599	6	M10	M20X1.0	32.0	65	18	23	2	4	61.82
1291600	7	M10	M30X1.5	45.0	120	22	29	2	5	63.31
1291601	7	M12	M30X1.5	45.0	120	22	29	2	5	63.31
1291602	7	M16	M30X1.5	45.0	120	22	29	2	5	63.31
1291603	9	M16	M40X1.5	58.0	210	28	37	2.5	6	70.02
1291604	9	M20	M40X1.5	58.0	210	28	37	2.5	6	70.02
1291605	9	M24	M40X1.5	58.0	210	28	37	2.5	6	70.02
1291606	11	M20	M50X1.5	70.0	330	33	43	2.5	6	110.82
1291607	11	M24	M50X1.5	70.0	330	33	43	2.5	6	110.82
1291608	11	M30	M50X1.5	70.0	330	33	43	2.5	6	110.82
<b>Stainless Steel</b>										
1291609	5	M4	M15X1.0	25.0	27.1	15	19	2	4	70.02
1291610	5	M5	M15X1.0	25.0	27.1	15	19	2	4	70.02
1291611	5	M6	M15X1.0	25.0	27.1	15	19	2	4	70.02
1291612	6	M6	M20X1.0	32.0	43.4	18	23	2	4	78.76
1291613	6	M8	M20X1.0	32.0	43.4	18	23	2	4	78.76
1291614	6	M10	M20X1.0	32.0	43.4	18	23	2	4	78.76
1291615	7	M10	M30X1.5	45.0	84	22	29	2	5	98.29
1291616	7	M12	M30X1.5	45.0	84	22	29	2	5	98.29
1291617	7	M16	M30X1.5	45.0	84	22	29	2	5	98.29
1291618	9	M16	M40X1.5	58.0	148	28	37	2.5	6	123.40
1291619	9	M20	M40X1.5	58.0	148	28	37	2.5	6	123.40
1291620	9	M24	M40X1.5	58.0	148	28	37	2.5	6	123.40
1291621	11	M20	M50X1.5	70.0	225	33	43	2.5	6	175.91
1291622	11	M24	M50X1.5	70.0	225	33	43	2.5	6	175.91
1291623	11	M30	M50X1.5	70.0	225	33	43	2.5	6	175.91