


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 9274COLOR  
INSULATOR: MOLDED PVC. AVAILABLE IN TEN COLORS.  
ALLIGATOR: STEEL. NICKEL PLATED.

2. P/N: W-600/COLOR  
18AWG 65X36 TINNED COPPER  
0.144 [3.66] O.D. PVC INSULATION  
AVAILABLE IN TEN COLORS.

3. PERFORMANCE  
MAXIMUM CURRENT: 4.0 AMPS  
MAXIMUM VOLTAGE: 5000 UL W.V.D.C.  
MAXIMUM TEMPERATURE: 221°F (105°C)

LTR	REVISIONS	DESCRIPTION	DATE	APPROVED

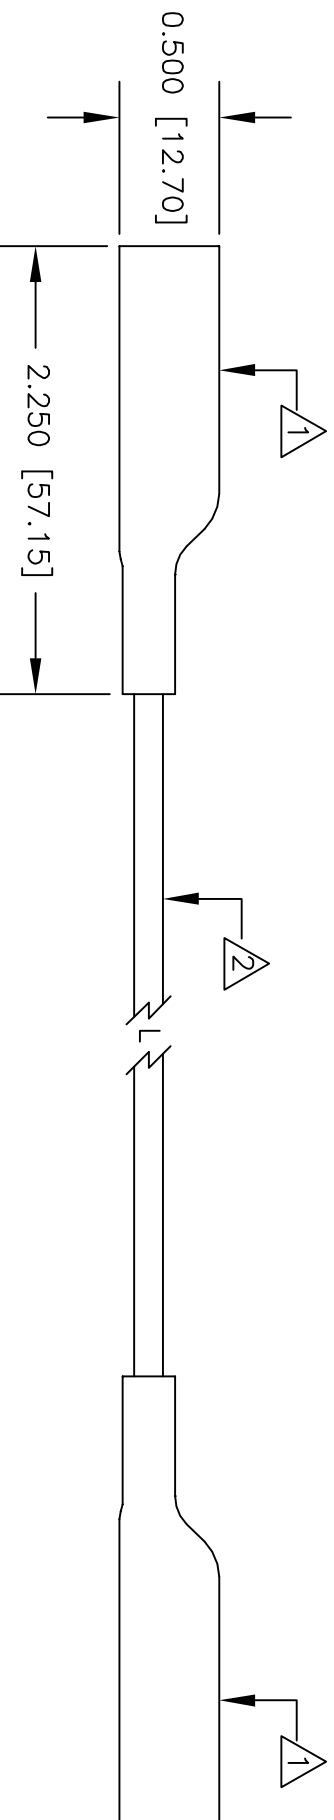

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ± ±		CONTRACT NO.	
				APPROVALS	
				DATE	
				DRAWN R.L. 11/10	
				APPROVED BY	
		MATERIAL SEE NOTE.			
		FINISH SEE NOTE.			
NEXT ASSY		USED ON			
APPLICATION		DO NOT SCALE DRAWING			
		<b>E-Z-HOOK</b> DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.		DESCRIPTION STD ALLIGATOR (9274) JUMPER	
		SIZE CODE IDENT NO. DRAWING NO.		SCALE	
		A 08505 684		1:1	
		REV.		SHEET 1 OF 1	

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK. DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.