


UNIT OF MEASURE	A	B	C	D	E	G	L	MAX. BUNDLE DIA.	MIN. TENSILE STRENGTH
INCHES	.534	.285	.142	.198	.046	.170	6.37	1.25	30 lbs.
MM	13.56	7.24	3.61	5.03	1.17	4.32	162.	31.75	13.608 kg.

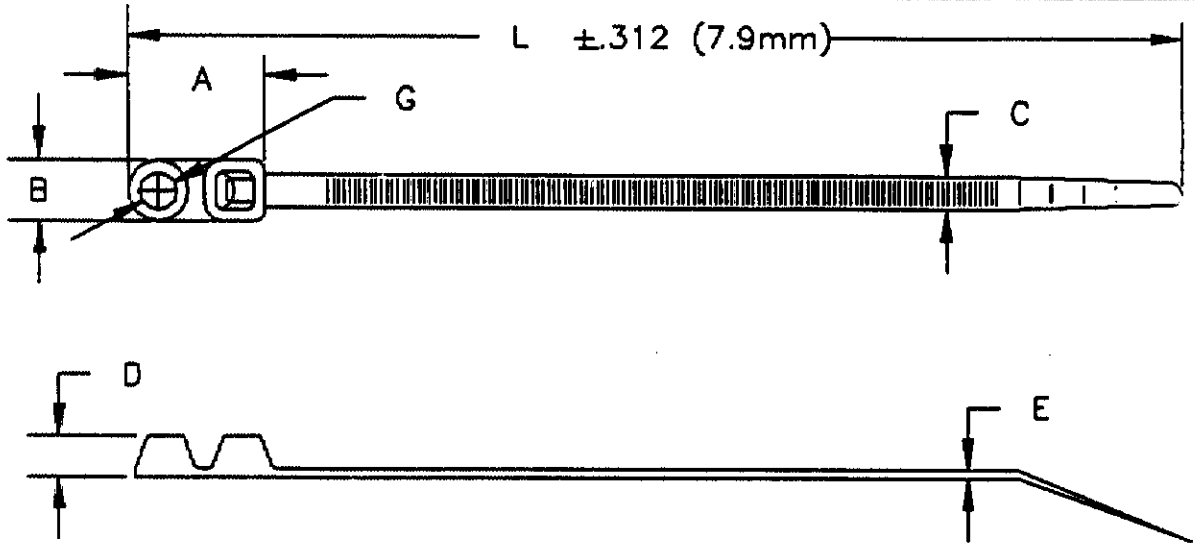

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN AMP PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM AMP INCORPORATED, HARRISBURG, PA.

NOTES:

1. MOISTURIZED 1 TO 2.5% WATER.
2. PACKAGED IN HEAT SEALED 3 MIL POLYBAG WITH LABEL PER DWG 404707.
3. OBSOLETE
4. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

APC ENGINEERING

JUL 13 1990

ISSUED BY *acm*

CUSTOMER DRAWING UNPUBLISHED

3	2-608693-9	NATURAL-1000 PCS. SMY114M	
	1-608693-9	NATURAL-100 PCS. SMY114C	
4	2-608693-0	BLACK-1000 PCS. SMY114MB	
4	1-608693-0	BLACK-100 PCS. SMY114CB	
DWG SIZE	PART No.	DESCRIPTION	ITEM NO

REVISION OF EACH ASSY NO. (WHEN BLANK, USE DWG REVISION)

QTY. REQ'D. PER ASSY.

PARTS LIST

LCC	D									
DIST	1									
MATERIAL		NYLON 6/6		HEAT TREAT		FINISH				
DIMENSIONS ARE IN INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DRAWN BY:		DATE:		APPROVED BY:		
2 PL DEC ±		3 PL DEC ± .039		AD-TEK/VL		6/22/90		7. Haines 6/90		
4 PL DEC ±		ANGLES ±		CHECK BY:		RELEASE:				
SURF TEXTURE: J		REMOVE BURRS, BREAK SHARP EDGES. .015 R. MAX.		BJM 6/90						
O1 REVISED PER ECO-09-026444		AEG 28NOV09		AMP AMP INCORPORATED Harrisburg, Pa. NAME: # 8 SCREW MOUNT CABLE TIE 6-1/4 INCH						
0 EKN 062890		7m 6/90								
P	F	LTR	REVISION RECORD	APP	DATE	SCALE: A	DRAWING No:	608693	SHEET: 1 OF 1	REV.: 01