



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
1/14/06	A	ADDED "ROHS COMPLIANT"	T.B.	B.S.	
3/18/06	B	UPDATED MATERIAL SPEC.	T.B.	B.S.	
4/22/06	C	ADDED CONTACT RESI. INFO.	T.B.	B.S.	
2/23/08	D	DIM. 2.550 WAS 2.500 DIM. 1.105 WAS 1.143.	T.B.	B.S.	

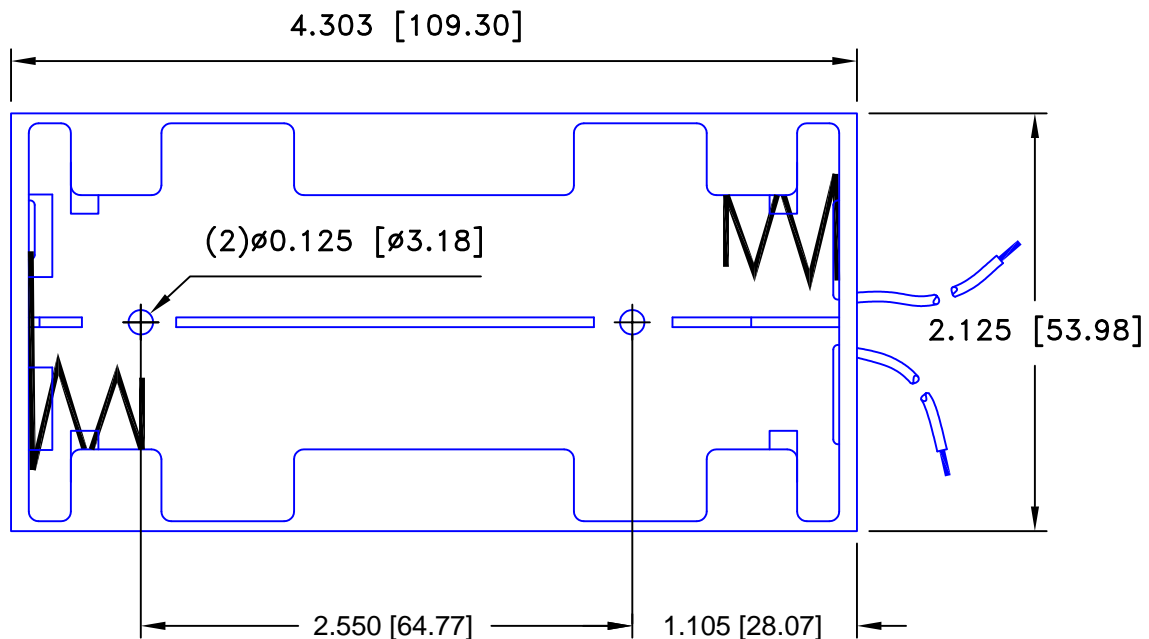


ORDERING CODE BH24C

L- Solder Lugs
W-(6") Wire Leads
SF-9Volt type snaps
B- Bump plates

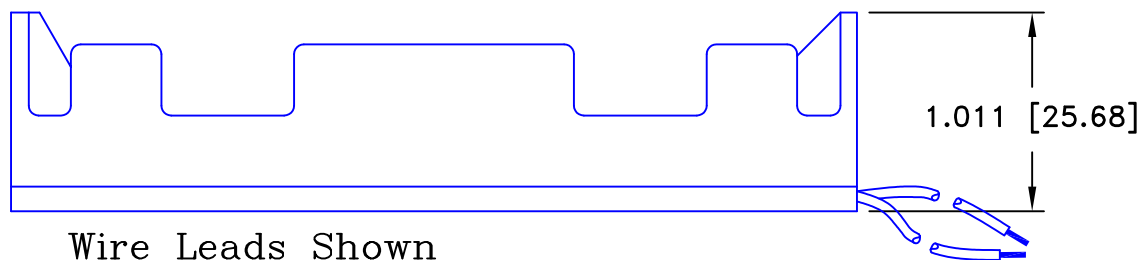


Wire Leads Shown

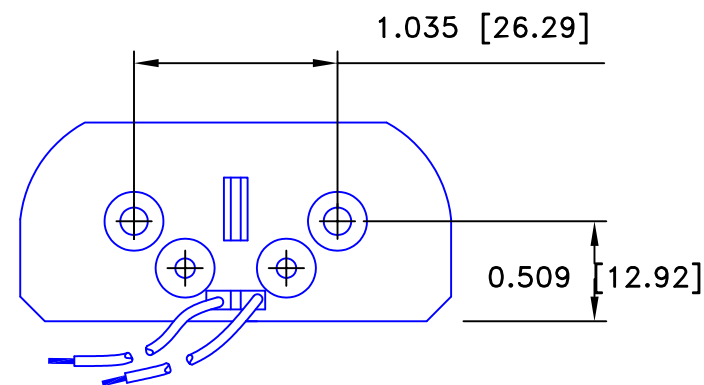

SPECIFICATIONS

Plastic material - Polypropylene, PP-1040
Flammability Rating -UL94-HB, UL File NO. E216959
Temperature Range: -10°C to +100°C
Springs - Nickel Plated Spring Steel
Wire - 26 AWG, UL1007, CSA
Rivets - Brass, Nickel Plated
9Volt Snaps - Brass, Nickel Plated
CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER
EIA-540J000
ROHS COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By T.S.
decimal ±.020 (.5)			Approved By T.B.
Fractional ± .030 (.8)	Title FOUR "C" CELL HOLDER		
Angular ± 3°	Date 2/23/08	Drawing Number BH24CW	