

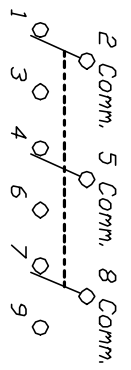


VIEW A-A

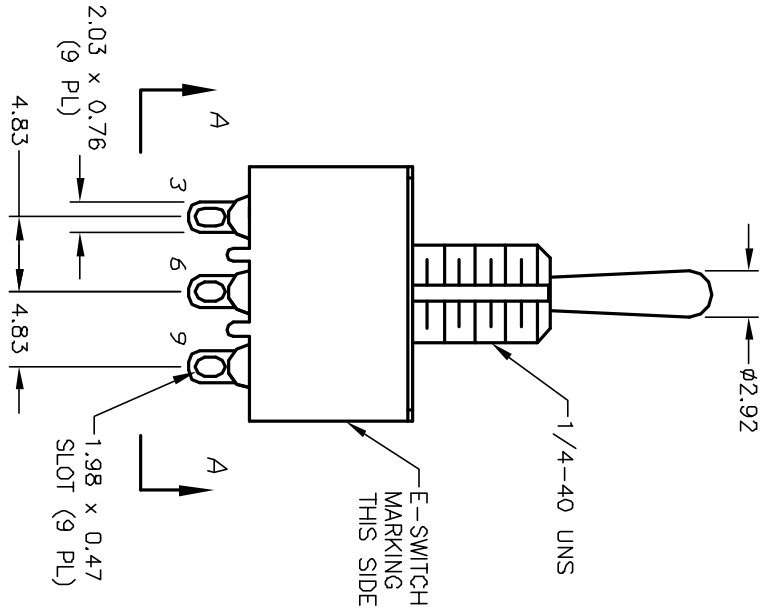

CIRCUIT: 3PDT

PDS. 1 PDS. 2 PDS. 3

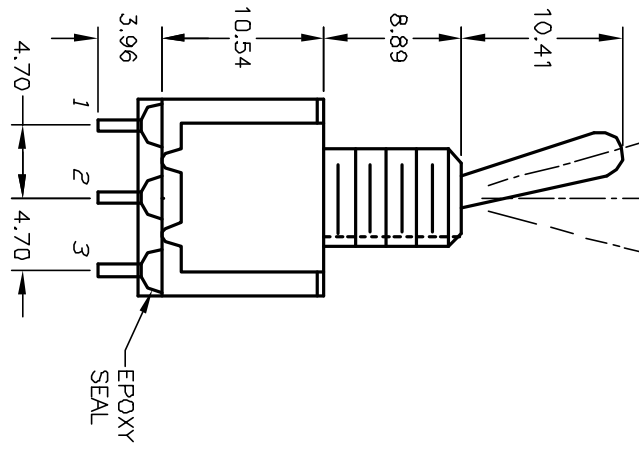

SWITCH FUNCTION			
PDS. 1	PDS. 2	PDS. 3	
DN	OFF	DN	
2-3,5-6 8-9	DPEN	2-1,5-4 8-7	

CONTACT CONFIGURATION

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: 0.0=±0.4  
0.00=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 5 AMPS @ 120VAC OR 28VDC;  
2 AMPS @ 250VAC
5. ELECTRIC LIFE: 50,000 make-and-break cycles  
at full load.
6. INSULATION RESISTANCE: 1,000 Mega-ohm min.
7. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
8. OPERATING TEMP.: -30°C to 85°C

B	10792	SW FUNCTION 'OFF' WAS 'NONE'	7-21-00	GLG
A	10085	RELEASED FOR PRODUCTION	1-21-99	MM
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS

**E-SWITCH®**

TITLE: 100 3P3 T1 B1 M1 Q E

SCALE: 2:1 DATE: 1-21-99 DR: MM DWG: T1.35009 REV: R