

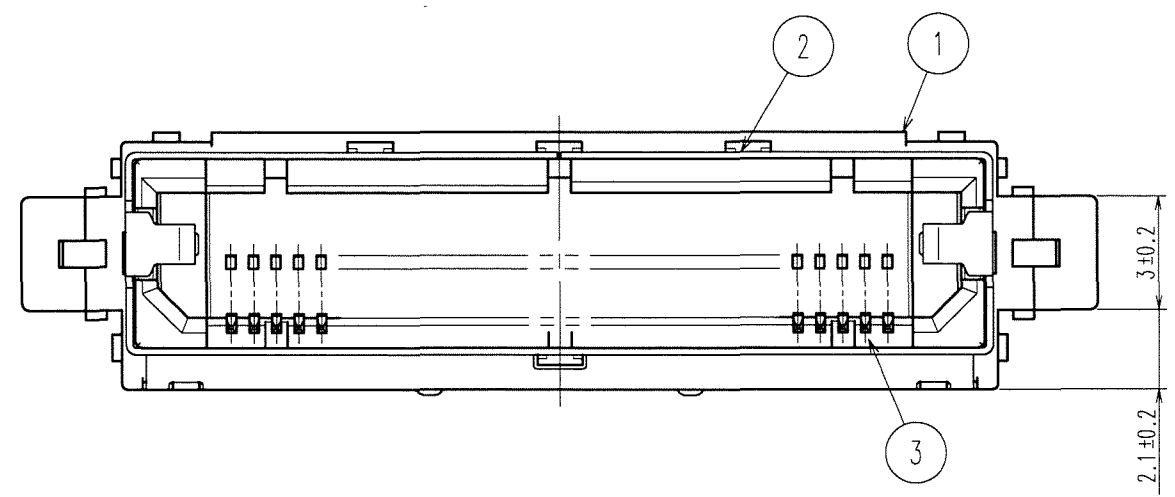
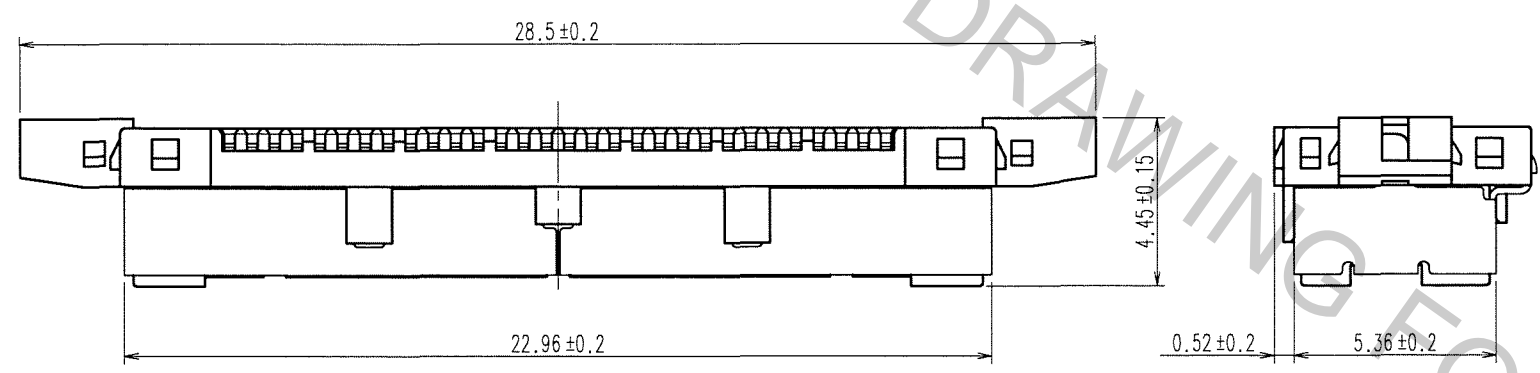


Apr.1.2017 Copyright 2017 HIROSE ELECTRIC CO., LTD. All Rights Reserved.


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

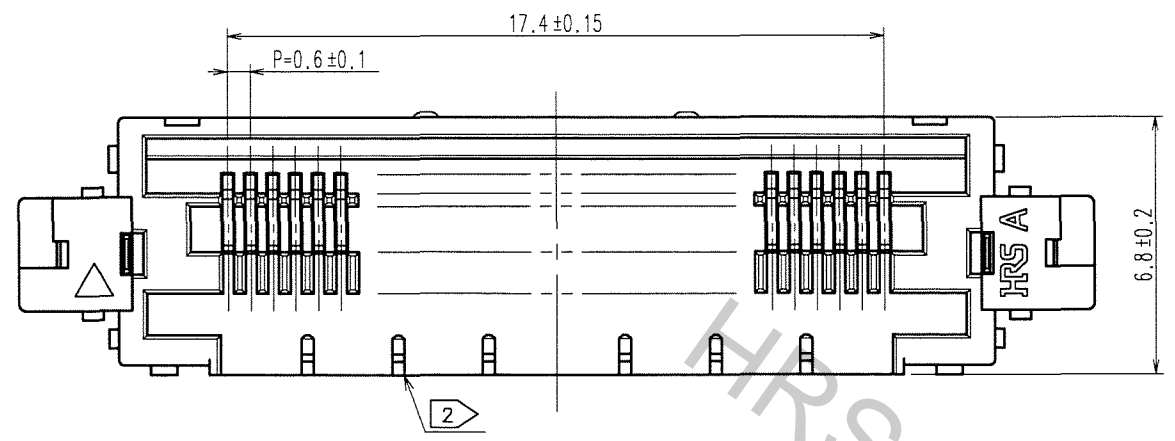

APPLICATION DIAGRAM(10:1)

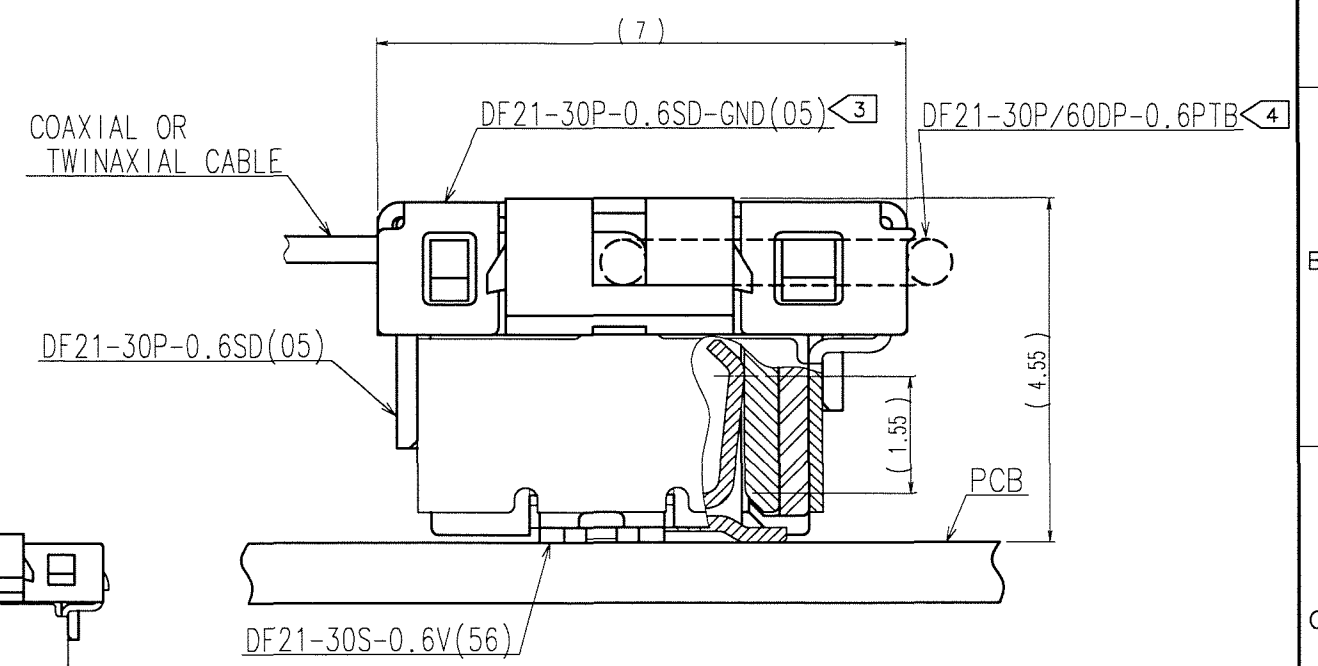

CABLE PREPARATION (4:1)

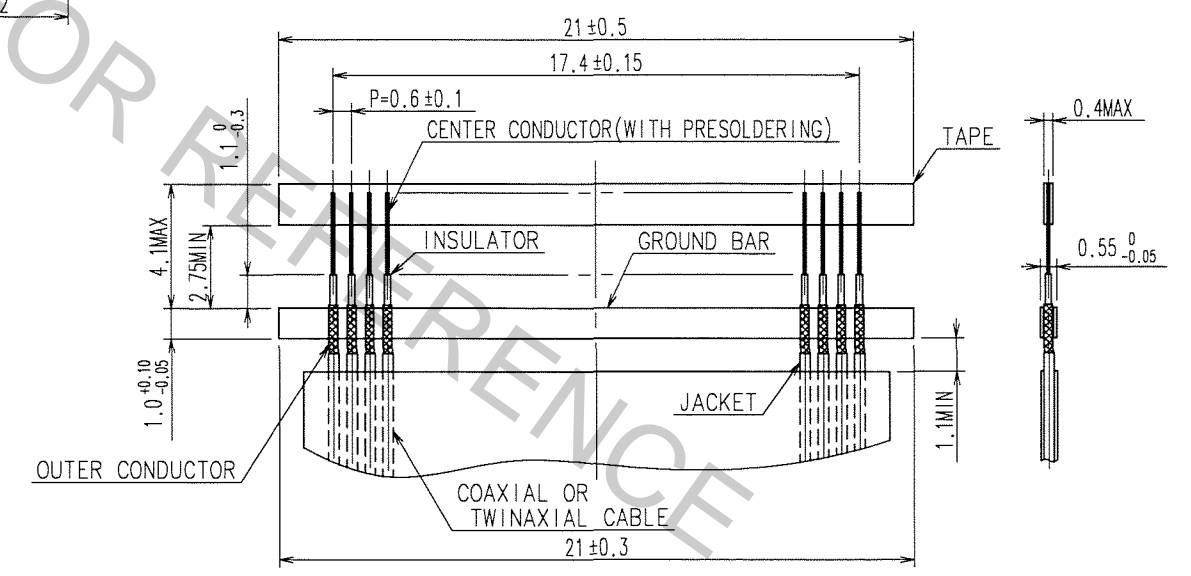

- NOTES 1: MINIMUM ORDERING QUANTITY IS ONE PACKAGE.(CONTAINING 100 PCS)
- 2: TWINAXIAL CABLE CAN NOT BE USED BETWEEN 4 TO 5 POS, 8 TO 9 POS, 12 TO 13 POS, 18 TO 19 POS, 22 TO 23 POS, 26 TO 27 POS, WHERE IT HAS BOSS.
- 3: METAL SHELL(DF21-30P-0.6SD-GND(05)) SOLD SEPARATELY. INSTALL THE SHELL AFTER CABLE ASSEMBLY.
- 4: PULL-TAB(DF21-30P/60DP-0.6PTB) OPTIONAL. SOLD SEPARATELY.

TO

2	PHOSPHOR BRONZE	SURFACE:TIN PLATED 1μ m min UNDER PLATING:NICKEL PLATED 0.5μ m min	3	PHOSPHOR BRONZE	CONTACT AREA:GOLD PLATED 0.1μ m min LEAD AREA:GOLD PLATED 0.02μ m min UNDER PLATING:NICKEL PLATED 0.5μ m min		
1	LCP	UL94V-0, BLACK					
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS		
CODE NO.(OLD) CL			DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
			A.Miura	T.fukushima	H.Umehara	J.Gna	
			'07.04.19	07.04.23	07.04.24	07.04.24	
DRAWING NO. EDC3-163700-03			PART NO. DF21-30P-0.6SD(05)				
SCALE 5 : 1			CODE NO. CL687-1502-6-05				
UNITS mm			1/1				