


Electrical Properties:

Frequency Range: 867~869 MHz
 Impedance: 50Ω Nominal
 VSWR: <2.0:1
 Gain: 2 dBi
 Radiation: Omni
 Polarization: Vertical
 Wave: 1/2 Wave Loaded

Mechanical Properties:


Connector: SMA type
 Material: Polyacetal(Black)
 Whip: Flexible Wire(Black)
 Base: Brass with black chrome plating
 Operation Temp.: -20°C to +65°C
 Storage Temp.: -30°C to +75°C

This is a RoHS compliant product.

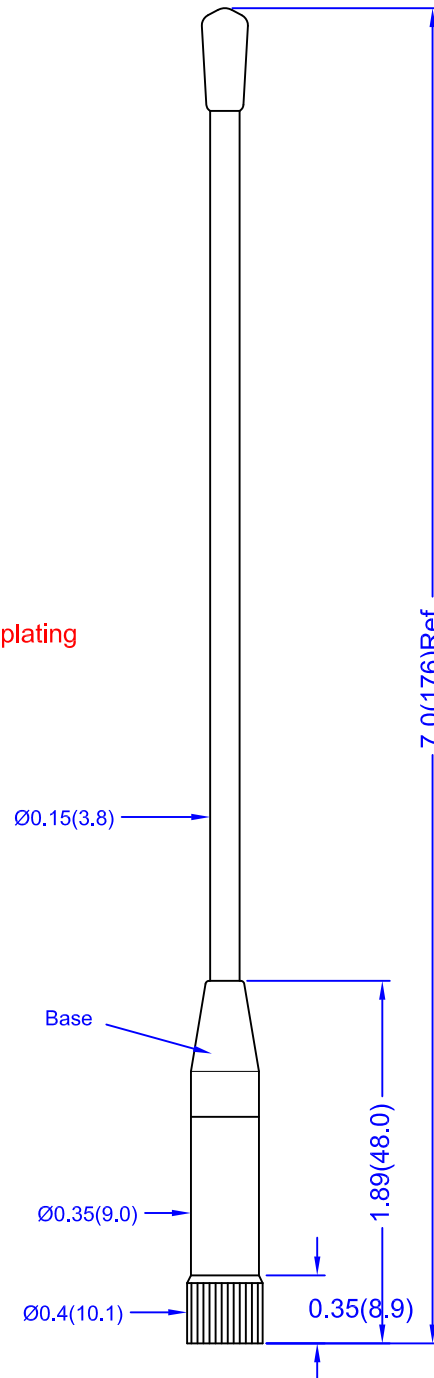

Series Part Numbers

Connector Code - XX -	Description	P / N
AM	SMA Plug	S463AM-868
AH	SMA Plug Reverse Polarity	S463AH-868

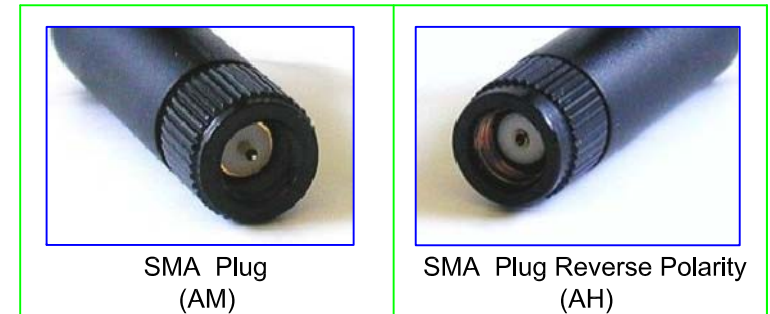

Connector Interface

TITLE	Europe ISM Band Straight Antenna - 463 Model		Rev. Date	SHEET
UNIT	DWG. NO.	S463XX-868	03/09/15	1 of 1
in.(mm)				
SCALE				
none				