



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2017-01-12	Spring Liu	change Rev.01 To Rev.A
B	LEN1720010	2017-02-06	Frank Deng	Change Cable length Tolerance

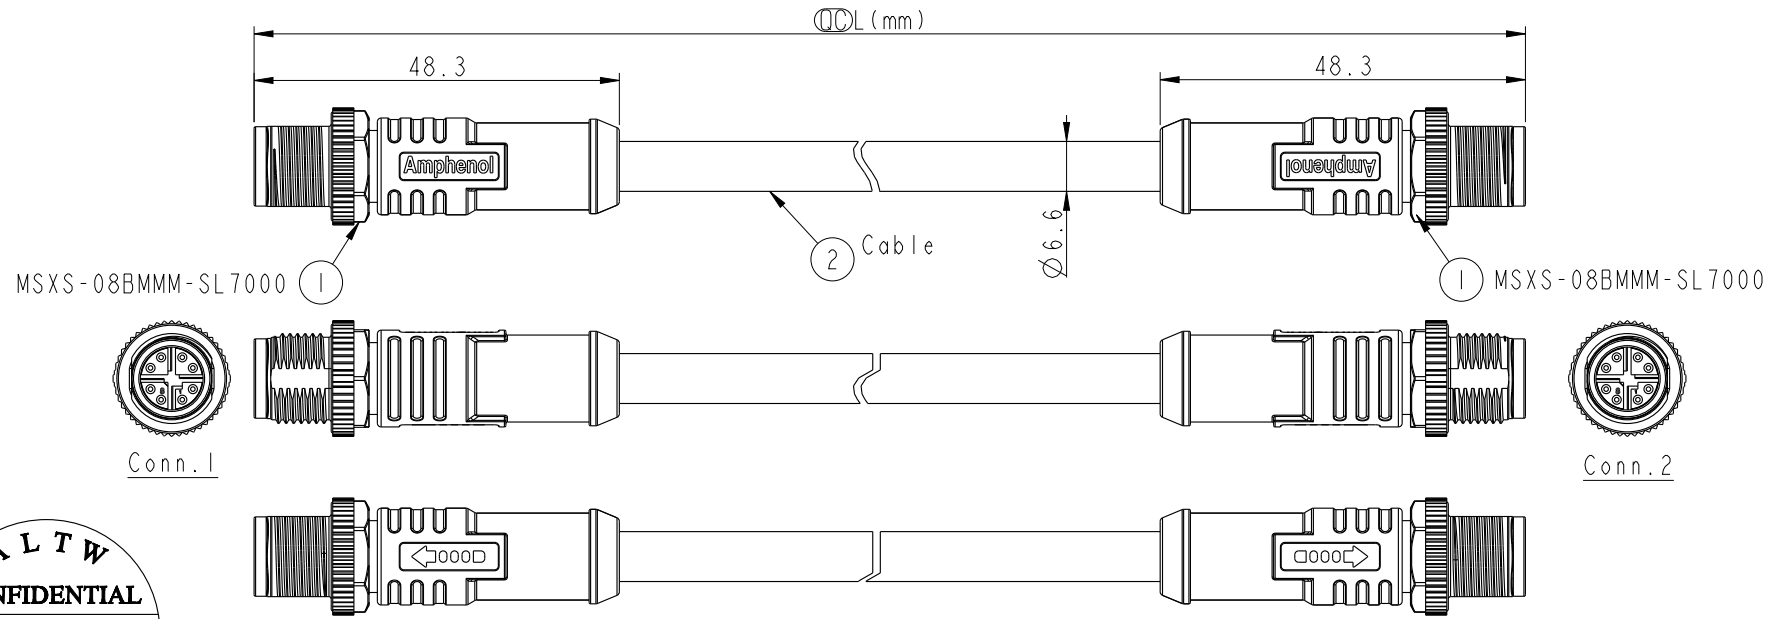

ALTW
CONFIDENTIAL
2017-02-06
R&D DEPT.

ALTW
DCC. DEPT.
CONFIDENTIAL
2017.02.09
ISSUED

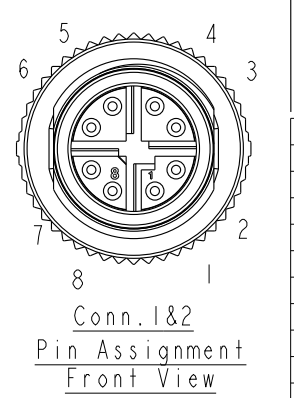

Shield	Braid	Shield
8	Blue 藍	8
7	White/Blue 白/藍	7
6	Brown 棕	6
5	White/Brown 白/棕	5
4	Green 綠	4
3	White/Green 白/綠	3
2	Orange 橙	2
1	White/Orange 白/橙	1
Conn. 1	Wire Color	Conn. 2

Pin Out

MSXS08ML-SXSML-SGXXX

XXX : 0.2~40Meters
 005 : 0.5Meter
 010 : 01Meters
 :
 :
 400 : 40Meters

Cable Length(L):0.2~40Meters

Note:
 * Ⓞ Important Dimensions To Check.
 * Waterproof Rate: IP67
 * Connector: Nylon+GF, Black
 * Male Pin: Copper Alloy, Gold Plated
 * Screw Nut: Zinc Alloy, Nickel Plated
 * Shield: Copper Alloy
 * Outer Mold: PU, Black
 * Cable: Cat6A, 26AWG*4P+B, LSZH, UV resistant
 * OD 6.6mm, Green Jacket.
 * Rated Voltage: 50 V AC, 60 V DC
 * Rated Current: 0.5A
 * Cable length Tolerance: 0.2M~0.5M±20mm
 0.6M~01M±40mm
 02M~05M±60mm
 06M~10M±100mm
 11M~30M±200mm
 31M~40M±500mm

UNIT: mm

TOLERANCE	
.X	±0.25
.XX	±0.1
.XXX	±0.05
ANGLES	±1°

TITLE M12 X-code Double Ended			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. B	WC-REV. A.3	Ⓞ: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Frank Deng	DATE 2017-02-06
DWG NO MSXS08ML-SXSML-SGXXX	CHECKED BY Spring Liu	DATE 2017-02-06
CUSTOMER ALTW	APPROVED BY Kevin Hu	DATE 2017-02-06