



12 GHz HAND FORMABLE .086 COAX CABLES

50 Ohm DC-12 GHz Hand Formable Coaxial Cables




Features:

- Center Conductor:** Silver-plated copper clad steel wire
- Outer Braid:** Tin-soaked copper braid, 100% coverage
- Insulation:** PTFE (Polytetrafluoroethylene) dielectric
- Cable Outer Dia.:** 0.086" (2.2mm)
- Connectors:** Gold plated brass
- Center Pin:** Gold plated brass
- Operating Temperature:** -40°C to +85°C
- Minimum Bend Radius:** 0.24" (6mm) single bend
0.99" (25mm) multiple bends

Electrically Matched Pairs Available

PN: CCSMA-MM-086-3
INSERTION LOSS

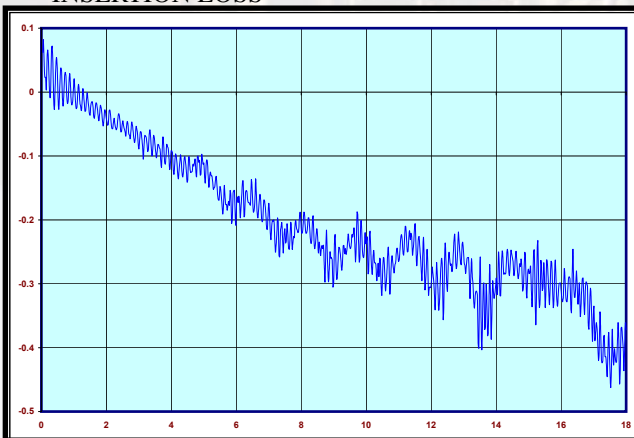

Electrical Specifications:

- Impedance:** 50 Ohms
- Frequency:** DC to 12 GHz
- Insertion Loss:** <0.82 dB/ft at 12 GHz
- VSWR:** <1.3, DC to 12 GHz
- Nominal Capacitance:** 28.6 pF/ft
- Velocity of Propagation:** 70%
- RF Shielding:** < -130 dB
- Attenuation (dB/ft):** 0.30 Typ. at 2 GHz
0.46 Typ. at 4 GHz
0.70 Typ. at 8 GHz
0.76 Typ. at 10 GHz
0.82 Typ. at 12 GHz

- Avg. Power in (Watts):** 900 @ 100 MHz
200 @ 1 GHz
50 @ 10 GHz

- Applications:** Jumpers
Instrumentation
High Frequency Interconnects



SMA / SMA [Straight/Straight]

Part Number	Description	Length
CCSMA-MM-086-3	.086 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	3"
CCSMA-MM-086-4	.086 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	4"
CCSMA-MM-086-5	.086 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	5"
CCSMA-MM-086-6	.086 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	6"
CCSMA-MM-086-7	.086 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	7"
CCSMA-MM-086-8	.086 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	8"
CCSMA-MM-086-10	.086 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	10"
CCSMA-MM-086-12	.086 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	12"
CCSMA-MM-086-18	.086 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	18"
CCSMA-MM-086-24	.086 Hand Formable Coax Cable, SMA Male/Male, Straight/Straight	24"

