



Features

- Surface Mount SMC package
- Standoff Voltage: 12 to 58 volts
- Power Dissipation: 1500 watts
- RoHS compliant*
- AEC-Q101 compliant**

Applications

- Protection of power buses
- Protection of I/O interfaces
- Overvoltage transient protection
- Automotive
 - Entertainment applications
 - Comfort applications
- Telecom, computer, industrial and consumer electronics applications

SMCJ-Q Transient Voltage Suppressor Diode Series

General Information

Bourns offers Transient Voltage Suppressor Diodes for surge and ESD protection applications, in compact chip package DO-214AB (SMC) size format. The Transient Voltage Suppressor series offers a choice of Working Peak Reverse Voltage from 12 V up to 58 V. Typical fast response times are less than 1.0 picosecond from 0 V to Breakdown Voltage.

Bourns® Chip Diodes conform to JEDEC standards, are easy to handle with standard pick and place equipment and their flat configuration minimizes roll away.

Electrical Characteristics (@ T_A = 25 °C Unless Otherwise Noted)

| Parameter | Symbol | Value | Unit |
|--|------------------|-------------|-------|
| Minimum Peak Pulse Power Dissipation (T _P = 1 ms) (Note 1,2) | P _{PK} | 1500 | Watts |
| Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method) (Note 3) | I _{FSM} | 200 | Amps |
| Operating Temperature Range | T _J | -55 to +150 | °C |
| Storage Temperature Range | T _{STG} | -55 to +150 | °C |

1. Non-repetitive current pulse, per Pulse Waveform graph and derated above T_A = 25 °C per Pulse Derating Curve.
2. Mounted on 5.0 mm² (0.03 mm thick) copper pads to each terminal.
3. 8.3 ms Single Half-Sine Wave duty cycle = 4 pulses maximum per minute (unidirectional units only).

BOURNS®

Asia-Pacific: Tel: +886-2 2562-4117 • Email: asiacus@bourns.com

EMEA: Tel: +36 88 520 390 • Email: eurocus@bourns.com

The Americas: Tel: +1-951 781-5500 • Email: americus@bourns.com

www.bourns.com

*RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011.

**"Q" part number suffix indicates AEC-Q101 compliance.

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

SMCJ-Q Transient Voltage Suppressor Diode Series

BOURNS®

Electrical Characteristics (@ T_A = 25 °C Unless Otherwise Noted)

| Unidirectional Device | | Bidirectional Device | | Breakdown Voltage V _{BR} (Volts) | | | Working Peak Reverse Voltage | Maximum Reverse Leakage @ V _{RWM} | Maximum Reverse Voltage @ I _{RSM} | Maximum Reverse Surge Current |
|-----------------------|---------|----------------------|---------|--|------|-----------------------|------------------------------------|---|---|--|
| Part No. | Marking | Part No. | Marking | Min. | Max. | @ I _T (mA) | V _{RWM} (V) | I _R (μA) | V _{RSM} (V) | I _{RSM} (A) |
| SMCJ12A-Q | GEEQ | SMCJ12CA-Q | BEEQ | 13.3 | 14.7 | 1 | 12 | 1 | 19.9 | 75.4 |
| SMCJ13A-Q | GEGQ | SMCJ13CA-Q | BEGQ | 14.4 | 15.9 | 1 | 13 | 1 | 21.5 | 69.8 |
| SMCJ14A-Q | GEKQ | SMCJ14CA-Q | BEKQ | 15.6 | 17.2 | 1 | 14 | 1 | 23.2 | 64.7 |
| SMCJ15A-Q | GEMQ | SMCJ15CA-Q | BEMQ | 16.7 | 18.5 | 1 | 15 | 1 | 24.4 | 61.5 |
| SMCJ16A-Q | GEPQ | SMCJ16CA-Q | BEPQ | 17.8 | 19.7 | 1 | 16 | 1 | 26 | 57.7 |
| SMCJ17A-Q | GERQ | SMCJ17CA-Q | BERQ | 18.9 | 20.9 | 1 | 17 | 1 | 27.6 | 54.4 |
| SMCJ18A-Q | GETQ | SMCJ18CA-Q | BETQ | 20.0 | 22.1 | 1 | 18 | 1 | 29.2 | 51.4 |
| SMCJ20A-Q | GEVQ | SMCJ20CA-Q | BEVQ | 22.2 | 24.5 | 1 | 20 | 1 | 32.4 | 46.3 |
| SMCJ22A-Q | GEXQ | SMCJ22CA-Q | BEXQ | 24.4 | 26.9 | 1 | 22 | 1 | 35.5 | 42.3 |
| SMCJ24A-Q | GEZQ | SMCJ24CA-Q | BEZQ | 26.7 | 29.5 | 1 | 24 | 1 | 38.9 | 38.6 |
| SMCJ26A-Q | GFEQ | SMCJ26CA-Q | BFEQ | 28.9 | 31.9 | 1 | 26 | 1 | 42.1 | 35.7 |
| SMCJ28A-Q | GFGQ | SMCJ28CA-Q | BFGQ | 31.1 | 34.4 | 1 | 28 | 1 | 45.4 | 33.1 |
| SMCJ30A-Q | GFKQ | SMCJ30CA-Q | BFKQ | 33.3 | 36.8 | 1 | 30 | 1 | 48.4 | 31 |
| SMCJ33A-Q | GFMQ | SMCJ33CA-Q | BFMQ | 36.7 | 40.6 | 1 | 33 | 1 | 53.3 | 28.1 |
| SMCJ36A-Q | GFPQ | SMCJ36CA-Q | BFPQ | 40 | 44.2 | 1 | 36 | 1 | 58.1 | 25.9 |
| SMCJ40A-Q | GFRQ | SMCJ40CA-Q | BFRQ | 44.4 | 49.1 | 1 | 40 | 1 | 64.5 | 23.3 |
| SMCJ43A-Q | GFTQ | SMCJ43CA-Q | BFTQ | 47.8 | 52.8 | 1 | 43 | 1 | 69.4 | 21.7 |
| SMCJ45A-Q | GFVQ | SMCJ45CA-Q | BFVQ | 50 | 55.3 | 1 | 45 | 1 | 72.7 | 20.6 |
| SMCJ48A-Q | GFXQ | SMCJ48CA-Q | BFXQ | 53.3 | 58.9 | 1 | 48 | 1 | 77.4 | 19.4 |
| SMCJ51A-Q | GFZQ | SMCJ51CA-Q | BFZQ | 56.7 | 62.7 | 1 | 51 | 1 | 82.4 | 18.2 |
| SMCJ54A-Q | GGEQ | SMCJ54CA-Q | BGEQ | 60 | 66.3 | 1 | 54 | 1 | 87.1 | 17.3 |
| SMCJ58A-Q | GGGQ | SMCJ58CA-Q | BGGQ | 64.4 | 71.2 | 1 | 58 | 1 | 93.6 | 16.1 |

Notes:

1. Suffix 'A' denotes a 5 % tolerance unidirectional device.
2. Suffix 'CA' denotes a 5 % tolerance bidirectional device.

Specifications are subject to change without notice.


The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

SMCJ-Q Transient Voltage Suppressor Diode Series




Performance Graphs


Peak Pulse Power Derating Curve

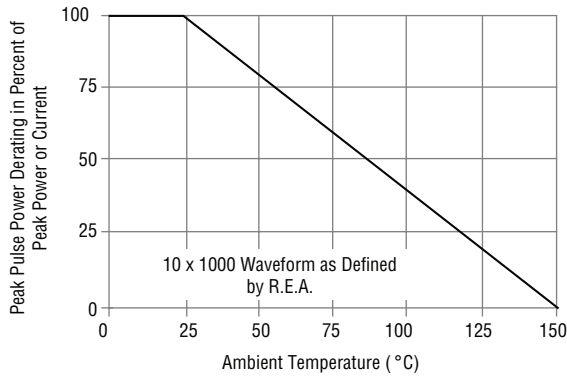


Maximum Non-Repetitive Surge Current

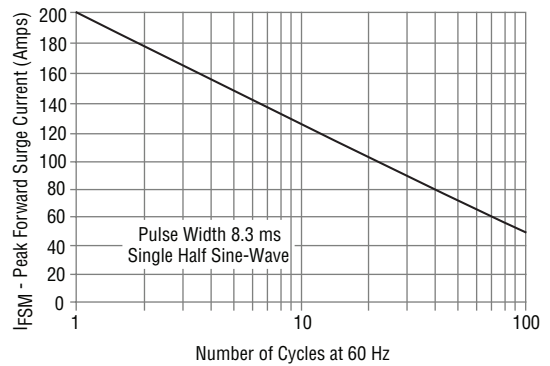


Pulse Waveform

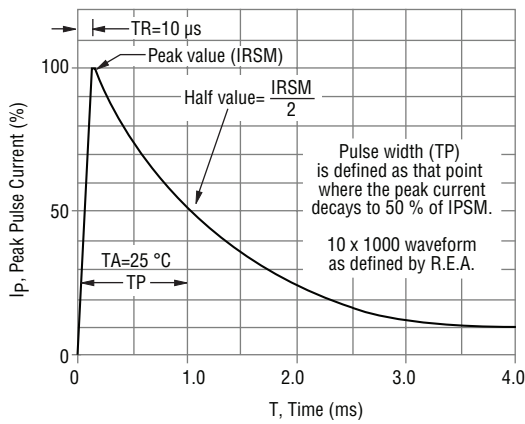


Typical Junction Capacitance

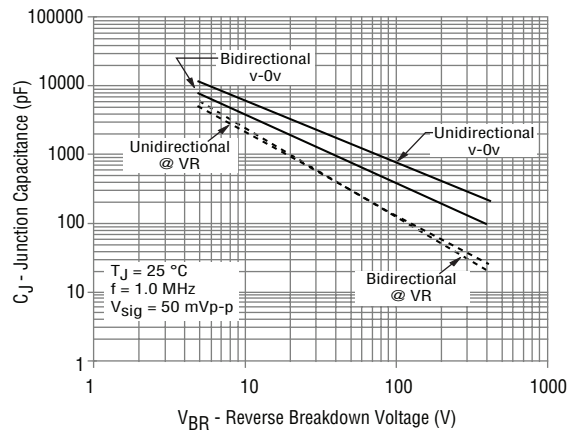

Pulse Rating Curve

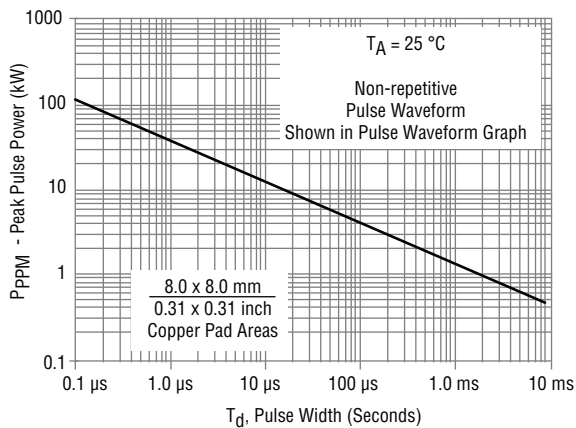

Steady State Power Derating Curve

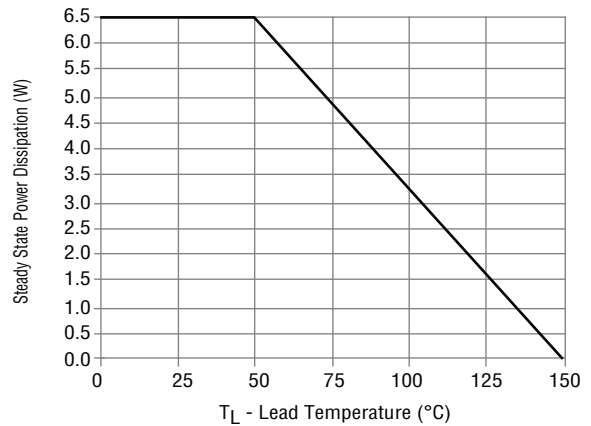


Specifications are subject to change without notice.
The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.
Users should verify actual device performance in their specific applications.

SMCJ-Q Transient Voltage Suppressor Diode Series




Product Dimensions

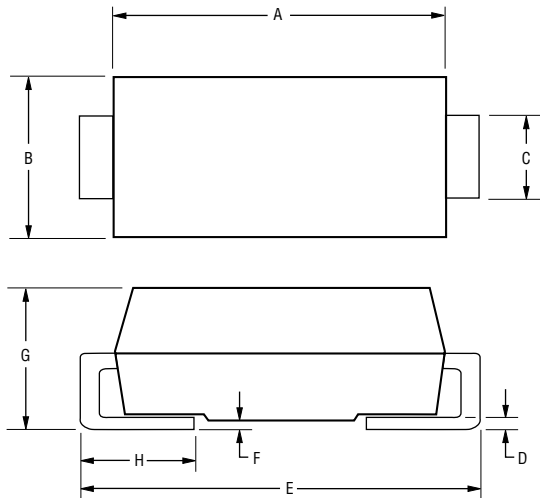


| Dimension | SMC (DO-214AB) |
|-----------|---------------------------------------|
| A | $\frac{6.60 - 7.11}{(0.260 - 0.280)}$ |
| B | $\frac{5.59 - 6.22}{(0.220 - 0.245)}$ |
| C | $\frac{2.90 - 3.20}{(0.115 - 0.125)}$ |
| D | $\frac{0.15 - 0.31}{(0.006 - 0.112)}$ |
| E | $\frac{7.75 - 8.13}{(0.305 - 0.320)}$ |
| F | $\frac{0.203}{(0.008)}$ MAX. |
| G | $\frac{2.00 - 2.62}{(0.079 - 0.103)}$ |
| H | $\frac{0.76 - 1.52}{(0.030 - 0.060)}$ |

DIMENSIONS: $\frac{\text{MM}}{\text{(INCHES)}}$

Typical Part Marking

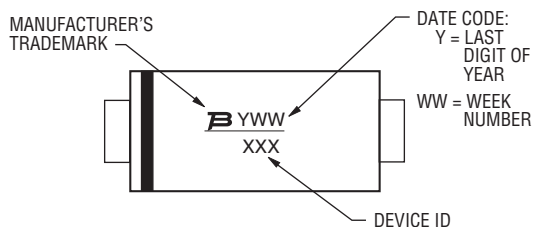

Recommended Footprint

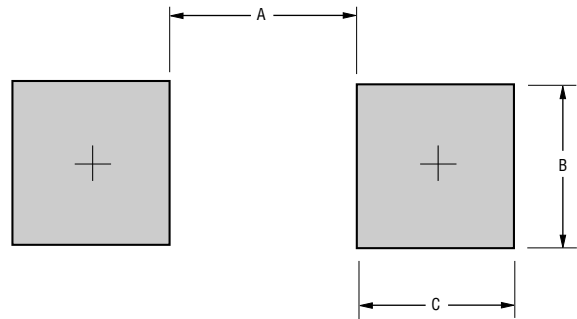

| Dimension | SMC (DO-214AB) |
|-----------|------------------------|
| A (Max.) | $\frac{4.69}{(0.185)}$ |
| B (Min.) | $\frac{3.07}{(0.121)}$ |
| C (Min.) | $\frac{1.52}{(0.060)}$ |

DIMENSIONS: $\frac{\text{MM}}{\text{(INCHES)}}$

Physical Specifications

Case Molded plastic per UL Class 94V-0
 Polarity..... Cathode band indicates unidirectional device
 No cathode band indicates bidirectional device

How to Order

Package _____ **SMCJ 12 CA - Q**
 SMCJ-Q = SMC/DO-214AB
 Working Peak Reverse Voltage _____
 2 = 12 V_{RWM} (Volts)
 Suffix _____
 A = 5 % Tolerance Unidirectional Device
 CA = 5 % Tolerance Bidirectional Device
 AEC-Q101 Suffix _____
 Q = AEC-Q101 Compliant, 13-inch Reel
 QH = AEC-Q101 Compliant, 7-inch Reel

Environmental Specifications

Moisture Sensitivity Level 1
 ESD Classification (HBM)..... 3B

Specifications are subject to change without notice.
 The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.
 Users should verify actual device performance in their specific applications.

SMCJ-Q Transient Voltage Suppressor Diode Series

BOURNS®

Packaging Information

The product will be dispensed in tape and reel format (see diagram below).



| Item | Symbol | SMC (DO-214AB) | |
|------------------------|----------------|--|------------------------|
| | | 7-Inch Reel | 13-Inch Reel |
| Carrier Width | A | $\frac{6.0 \pm 2.0}{(0.236 - 0.079)}$ | |
| Carrier Length | B | $\frac{8.3 \pm 0.20}{(0.327 \pm 0.008)}$ | |
| Carrier Depth | C | $\frac{2.5 \pm 0.20}{(0.098 \pm 0.008)}$ | |
| Sprocket Hole | d | $\frac{1.50 \pm 0.10}{(0.059 \pm 0.004)}$ | |
| Reel Outside Diameter | D | $\frac{178}{(7.008)}$ | $\frac{330}{(12.992)}$ |
| Reel Inner Diameter | D ₁ | $\frac{50.0}{(1.969)}$ MIN. | |
| Feed Hole Diameter | D ₂ | $\frac{13.0 + 0.50/-0.20}{(0.512 + 0.020/-0.008)}$ | |
| Sprocket Hole Position | E | $\frac{1.75 \pm 0.10}{(0.069 \pm 0.004)}$ | |
| Punch Hole Position | F | $\frac{7.50 \pm 0.10}{(0.295 \pm 0.004)}$ | |
| Punch Hole Pitch | P | $\frac{8.00 \pm 0.10}{(0.315 \pm 0.004)}$ | |
| Sprocket Hole Pitch | P ₀ | $\frac{4.00 \pm 0.10}{(0.157 \pm 0.004)}$ | |
| Embossment Center | P ₁ | $\frac{2.00 \pm 0.10}{(0.079 \pm 0.004)}$ | |
| Overall Tape Thickness | T | $\frac{0.30 \pm 0.10}{(0.012 \pm 0.004)}$ | |
| Tape Width | W | $\frac{16.00 \pm 0.30}{(0.630 \pm 0.012)}$ | |
| Reel Width | W ₁ | $\frac{22.4}{(0.882)}$ MAX. | |
| Quantity per Reel | -- | 500 | 3000 |

REV. 02/18

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.