


PART NO.	A	△
830126-1	8.00	[203.2]
830126-2	6.00	[152.4]
830126-3	5.00	[127.0]
830126-4	9.00	[228.6]
830126-5	60.00	[1524.0]
830126-6	33.50	[850.9]
830126-7	34.50	[876.3]
830126-8	35.50	[901.7]
830126-9	81.00	[2057.4]
1-830126-0	73.00	[1854.2]
1-830126-1	89.00	[2260.6]
1-830126-2	18.00	[457.2]
1-830126-3	12.00	[304.8]
1-830126-4	6.25	[158.8]
1-830126-5	120.00	[3048.0]
1-830126-6	24.00	[609.6]
1-830126-7	36.00	[914.4]
1-830126-8	42.00	[1066.8]
1-830126-9	96.00	[2438.4]
2-830126-0	72.00	[1828.8]
2-830126-1	48.00	[1219.2]
2-830126-2	84.00	[2133.6]
2-830126-3	240.00	[6096.0]
2-830126-4	30.00	[762.0]
2-830126-5	15.00	[381.0]
2-830126-6	180.00	[4572.0]
2-830126-7	144.00	[3657.6]
2-830126-8	21.00	[533.4]
2-830126-9	216.00	[5486.4]
3-830126-0	160.00	[4064.0]
3-830126-1	22.00	[558.8]
3-830126-2	31.00	[787.4]
3-830126-3	20.00	[508.0]
3-830126-4	11.00	[279.4]
3-830126-5	10.00	[254.0]
3-830126-6	14.00	[355.6]
3-830126-7	168.00	[4267.2]
3-830126-8	40.00	[1016.0]
3-830126-9	55.00	[1397.0]
4-830126-0	11.81	[300.0]
4-830126-1	108.00	[2743.2]
4-830126-2	26.00	[660.4]

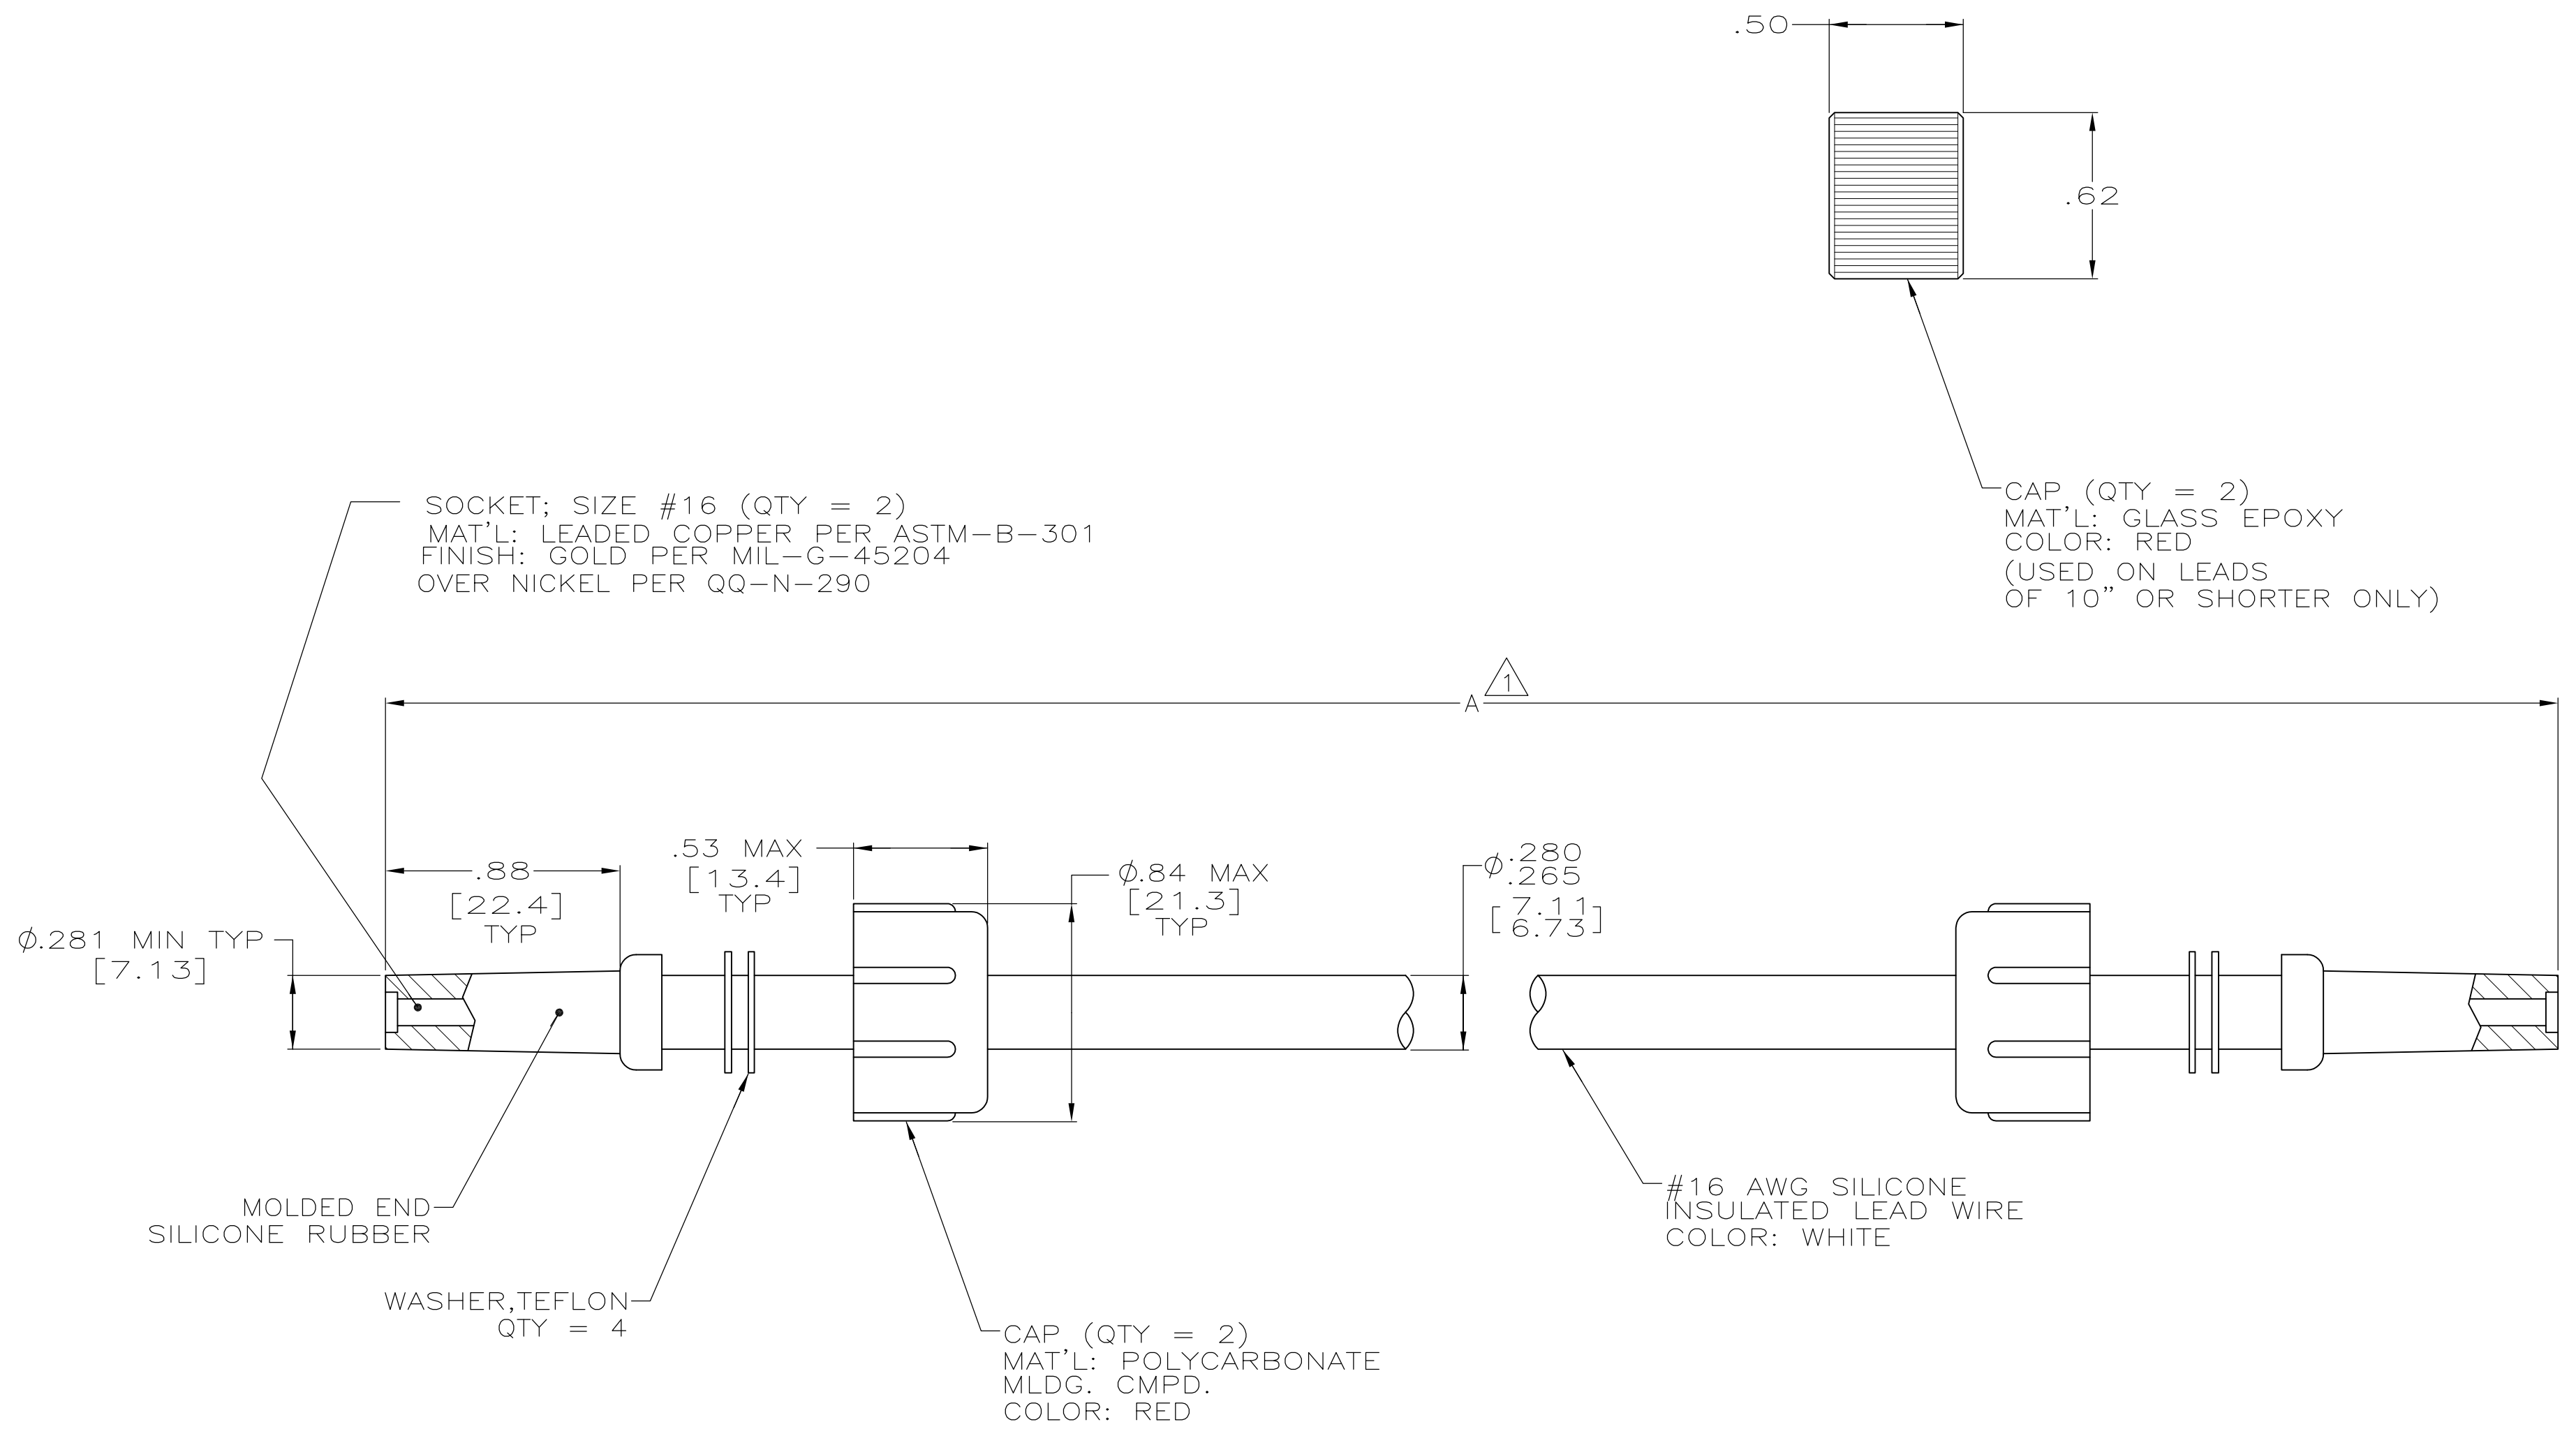

1. TOLERANCE OF LEAD LENGTH:
 UP TO 24 INCHES [609.6] = ±.12 [±3.0]
 24 INCHES [609.6] & UP = ±1%
2. MARKED PER MIL-STD-130.
3. TO MATE WITH AMP LGH-1
 RECEPTACLE WITH .88 [22.4] BARREL DEPTH.
4. OPERATING VOLTAGE: 20 KVDC AT 0 TO 70,000 FEET, -55° C TO 125° C.
5. MIN LEAD LENGTH IS 5 INCHES.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN C.C.THOMAS 9-13-91	STE TE Connectivity	
DIMENSIONS: INCHES[MM]		CHK S.GLADFELTER 9-23-91	NAME LEAD ASS'Y, LGH-1, DOUBLE MOLDED END	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S.GLADFELTER 9-23-91	PRODUCT SPEC	
0 PLC ± -		APPLICATION SPEC		
1 PLC ± -		SIZE A1		
2 PLC ± .02 [0.5]		CAGE CODE 00779		
3 PLC ± -		DRAWING NO 830126		
4 PLC ± -		RESTRICTED TO		
ANGLES ± -		WEIGHT		
FINISH		CUSTOMER DRAWING		
MATERIAL SEE CALLOUTS		SCALE 2:1 SHEET 1 OF 1 REV P1		