


Large Incandescent Indicators

WITH MECHANICAL DIMMER CAPS
FOR MOUNTING IN 1" CLEARANCE HOLE
FOR 24 TO 250V OPERATION



S-6
DOUBLE CONTACT
BAYONET BASE

See lamp ratings
on page K.

Recognized under the component
program of Underwriters'
Laboratories Inc.


75W., 125V.



These series indicator lights meet or exceed requirements of MIL-L-3661.


MATERIALS AND FINISHES

- **Mounting Bushing and Lens Holder:** Brass, black nickel finish.
- **Knurled Flange Ring:** Brass, black nickel finish.
- **Mounting Nut:** Brass, white nickel finish.
- **Internal-tooth Lockwasher:** Phosphor bronze, white nickel finish.
- **Terminals:** Solder — brass, hot tinned with elongated slot.
Screw—brass, white nickel finish.

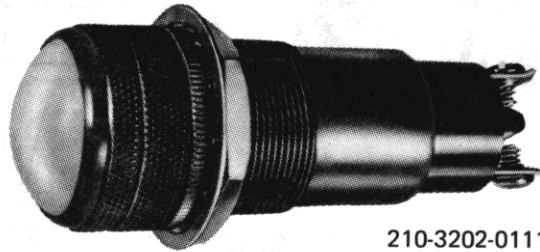

210-3202-0111-201
Convex lens

MECHANICAL DIMMER CAPS
provide adjustable intensity
of light emission.



210 SERIES
209 SERIES

MECHANICAL DIMMER WITH SCREW-ON LENS CAP

		solder terminal	screw terminal
		61-3402-02-201	61-3202-02-201
CAP PART NUMBERS		COMPLETE ASSEMBLY PART NUMBERS	
	<p>CONVEX Mech. Dimmer</p> <p>210-0111-200 back frosted, semi-blackout</p> <p>209-0111-200 back frosted, complete blackout</p>	<p>210-3402-0111-201</p> <p>209-3402-0111-201</p>	<p>210-3202-0111-201</p> <p>209-3202-0111-201</p>

BASE PART NUMBERS

Order complete with lamp to be assured of receiving the
indicator light and correct lamp together for immediate use.

WATER-TIGHT CONSTRUCTION: The assemblies on this page may be made
water-tight on the face of the panel. To specify, change the last digit in the catalog
number suffix to 3. Example: 210-3202-0111-203.