



SMT COMMON MODE CHOKES

for PoE Applications



 RoHS-6 peak reflow temperature rating
245°C

 Meets IEEE 802.3 specification

Electrical Specifications @ 25°C - Operating Temperature -0°C to +70°C

Part Number ^{1, 2, 3}	SRF (TYP)	MAX Inter-winding Capacitance (pF)	Leakage Inductance (μH MAX)	OCL (±35%)	DC Resistance (Ω MAX)	Impedance Curves ⁴
H6030NL	120 MHz	8	0.12	15 μH	0.20	1
H6031NL	65 MHz	15	0.15	30 μH	0.28	2
H6032NL	40 MHz	18	0.20	60 μH	0.35	3
H6033NL	28 MHz	25	0.25	100 μH	0.40	4
H6034NL	7.1 MHz	10	0.20	250 μH	0.30	5
H6035NL	5.6 MHz	18	0.25	500 μH	0.40	6
H6036NL	3.9 MHz	30	0.30	1 mH	0.50	7

Notes:

1. Turns Ratio: (1 - 4) : (5 - 8) = 1:1 (±3%)
2. Between channel isolation: 500 VAC @ 60 seconds
3. Polarity: per schematic
4. **For Tape & Reel** packaging, add a "T" suffix to the end of the part number when ordering (i. e. **H6030NL** becomes **H6030NLT**).
5. See charts page 2

SMT COMMON MODE CHOKES





for PoE Applications



Mechanicals

Schematics


H6030NL-H6036NL

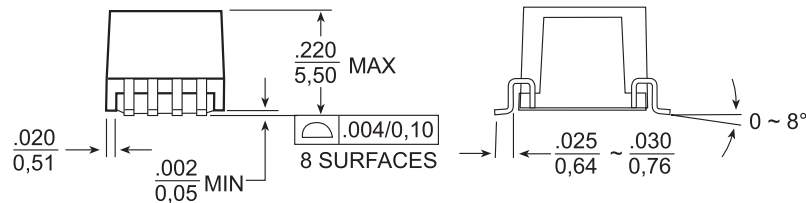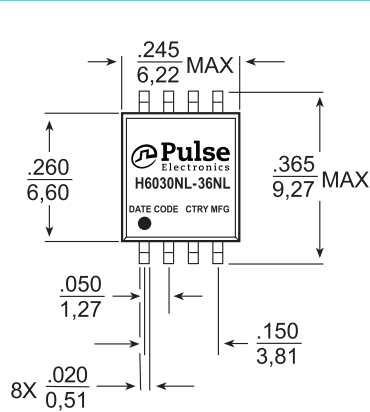

Weight0.4 grams **Dimensions:** $\frac{\text{Inches}}{\text{mm}}$
 Tape & Reel750
 Tube85 Unless otherwise specified, all tolerances are $\pm \begin{matrix} .010 \\ 0.25 \end{matrix}$

Impedance Curves

H6030NL-H6036NL

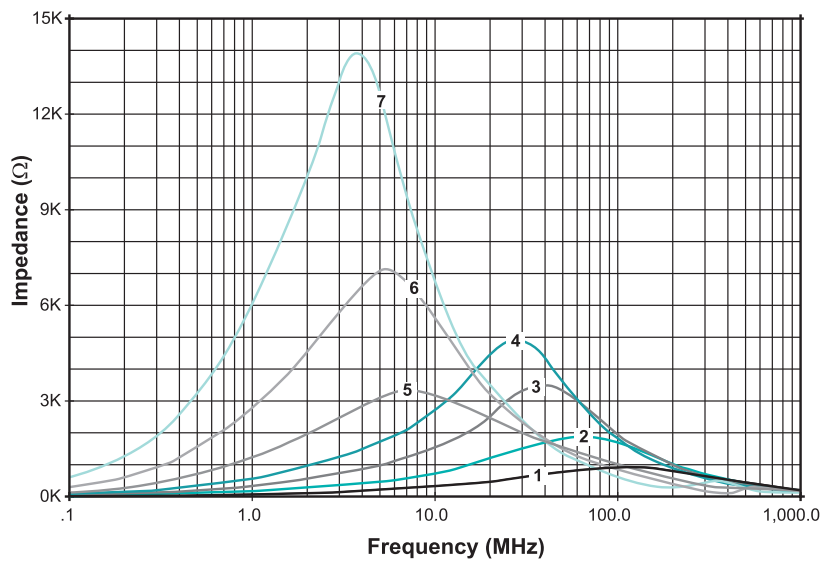

SMT COMMON MODE CHOKES

for PoE Applications

For More Information

Pulse Worldwide Headquarters

12220 World Trade Drive
San Diego, CA
92128
U.S.A.

Tel: 858 674 8100

Pulse Europe

Einsteinstrasse 1
D-71083 Herrenberg
Germany

Tel: 49 7032 7806

Pulse China Headquarters

B402, Shenzhen Academy of
Aerospace Technology Bldg.
10th Kejian Road
High-Tech Zone
Nanshan District
Shenzhen, PR China
518057

Pulse North China

Room 2704/2705
Super Ocean Finance
Ctr.
2067 Yan An Road
West
Shanghai 200336
China

Pulse South Asia

135 Joo Seng Road
#03-02
PM Industrial Bldg.
Singapore 368363

Tel: 65 6287 8998
Fax: 65 6287 8998

Pulse North Asia

3F, No. 198
Zhongyuan Road
Zhongli City
Taoyuan County 320
Taiwan R. O. C.
Tel: 886 3 4356768
Fax: 886 3 4356823
(Pulse)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2011. Pulse Electronics, Inc. All rights reserved.