

1

2





3

4


5

6

7

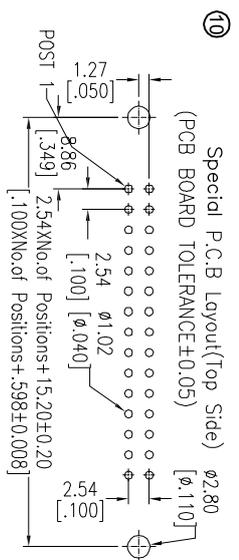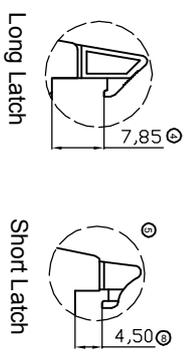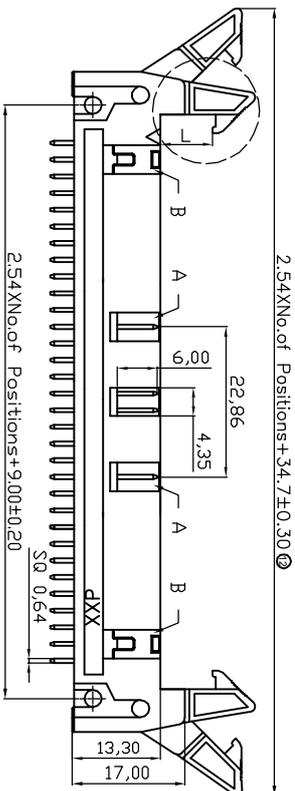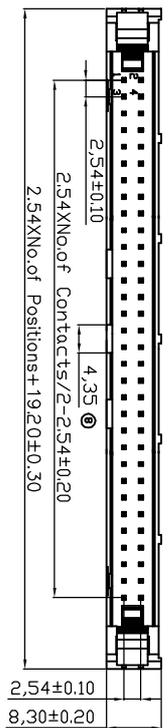

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)

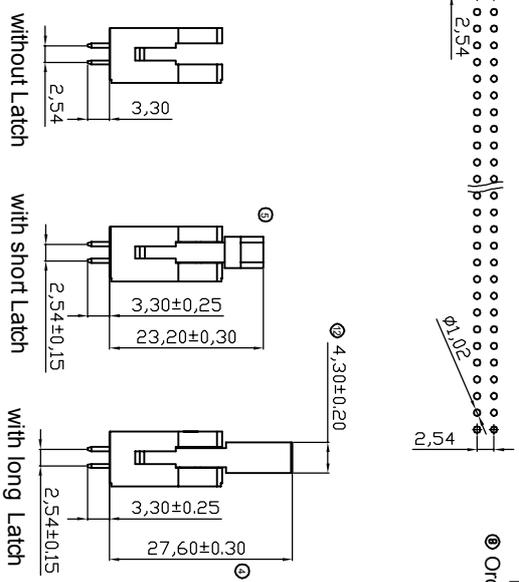

NOTES:
MATERIAL
 1. Insulator Material: PBT+30%G.F. (UL94V-0), Grey
 2. Contact Material : Brass
 3. Contact Plating : Gold Flash / Tin or Full Tinned Over Ni
ELECTRICAL
 1. Current Rating : 3.0AMP
 2. Withstand Voltage : 1000V AC/minute
 3. Contact Resistance : 20mΩ max
 4. Insulation Resistance: 1000MΩ min
ENVIRONMENTAL
 1. Operation Temperature: -40°C to +105°C
 2. Soldering Temperature: 235°C±5°C/5s±1s
 3. Packing : Tray
 4. No side slot "A" and "B" from 6 to 16 pin
 No side slot "A" from 18 to 58 pin

Ordering Information
 AWH XXG-0XX2-T

06 08	No. of Contacts	1	Latch Type
10 12	2: Gold Flash	2	(Q/Wo latch)
14 16	Trimmed	2	(with short latch)
18 20		3	(with long latch)
24 26		5	Full Tinned
30 34			
40 50			
60 64			

RoHS compliant
 Unit: mm



Scale	Free	Update the dimension	Winnie	Date	Name
TOLERANCE					
X.X	±0.40	Add the dimension	Winnie	29.04.2015	Drawn
X.XX	±0.25	Add special PCB layout	Ray	13.10.2014	Approved
X.XXX	±0.15	Add UL file no.	Amy	12.12.2013	
Angle	±3°	Add the Filled Tinned Version	Winnie	11.11.2013	
		Update	Winnie	30.08.2013	
		Modification			



Customer-No.	ASSMANN WSW-No.	AWH XXG-0XX2-T
Drawing-No.	ASS 2310 CO	rev12
Replace		Sheet

1

2

3

4

5

6

7

sv7