


## DIN rail perforated - NS 15 WH PERF 2000MM - 1204096

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



DIN rail perforated, Standard profile, width: 15 mm, height: 5.5 mm, acc. to EN 60715, material: Steel, Galvanized, white passivated, length: 2000 mm, color: white

### Key Commercial Data

Packing unit	5 STK
GTIN	 4 017918 106430
GTIN	4017918106430

### Technical data

#### Dimensions

Height	5.5 mm
Length	2000 mm
Width	15 mm
Hole width	12.20 mm
Hole height	4.20 mm
Drill hole spacing	20.00 mm

#### General

Material	Steel
Coating	Galvanized, white passivated
Color	white


#### Standards and Regulations

Test standard	acc. to EN 60715
Connection in acc. with standard	IEC / EN

### Drawings

## DIN rail perforated - NS 15 WH PERF 2000MM - 1204096

Dimensional drawing

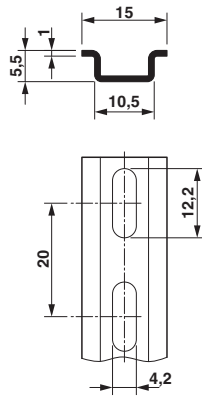

---

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>